

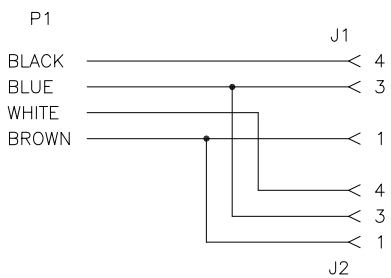


FEMALE END VIEW		WIRING DIAGRAM		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK (J1,J2)
				MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	125 V
				OUTER JACKET MATERIAL/COLOR	PVC/GRAY (P1); PVC/YELLOW (J1,J2)
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTOR [AWG]	4x22 AWG (P1); 3x24 AWG (J1,J2)
				TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

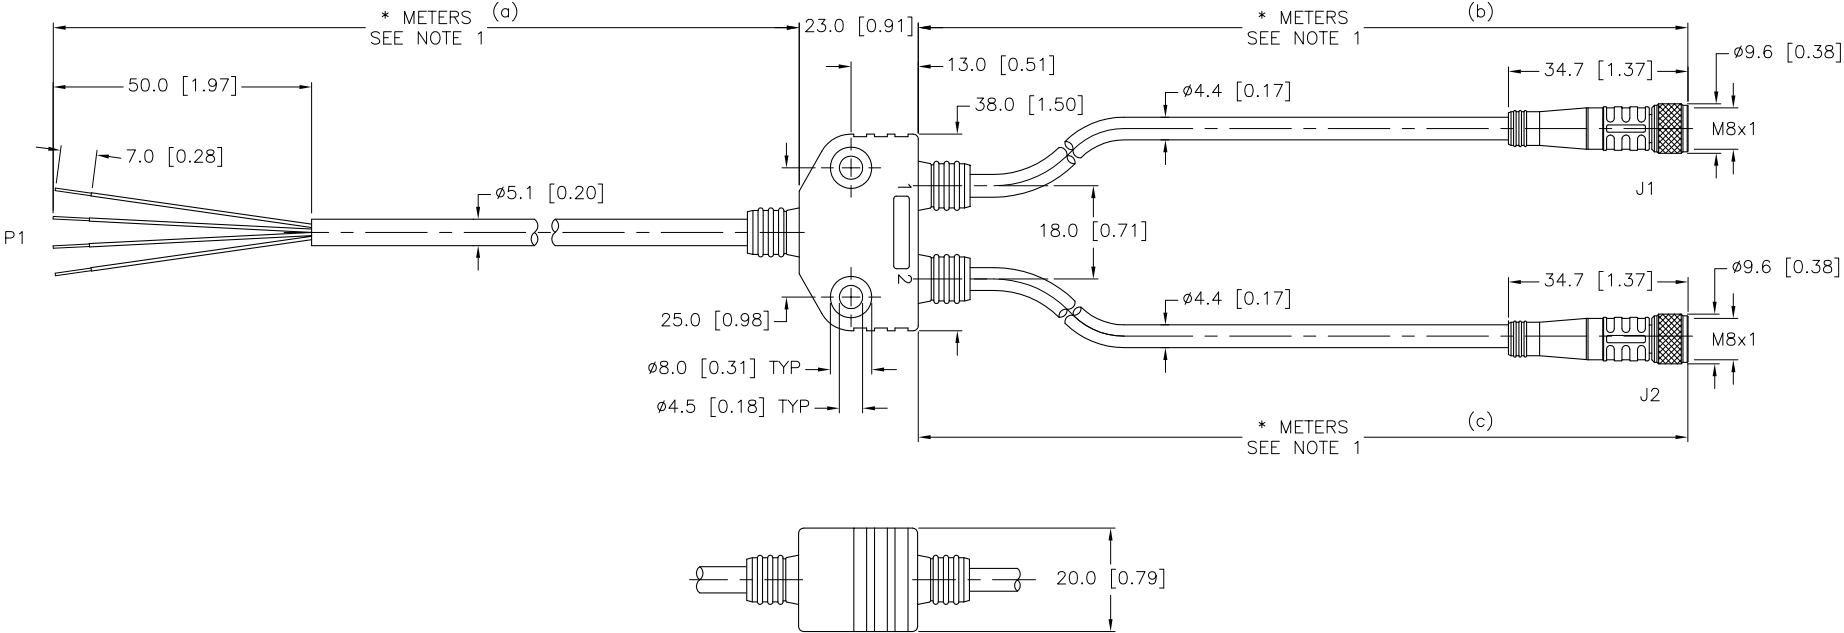


CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- STRIP AND TIN LENGTHS ARE FOR REFERENCE ONLY; SOME LENGTHS MAY NOT BE STRIPPED AND TINNED.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.						DRFT RDS		DATE 06/08/09	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DSGN		SCALE 1=1.5	
SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
FINISH				MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		VB2-*/2PKG 3M-*/* (a) (b) (c)	
SEE SPECIFICATIONS								IDENTIFICATION NO.	
								REV	
								D	
D DRAWING PROCESSED AS PART OF ECO 33971				CBM 04/07/11 33971				FILE: 777024741	
REV DESCRIPTION				BY DATE ECO NO.				SHEET 1 OF 1	