






FEMALE END VIEW	LOCKNUT DETAIL	TYPICAL CUTOUT	SPECIFICATIONS	
 1 = BLACK 2 = GREEN/YELLOW 3 = RED 4 = WHITE 			CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK
			MOLDED MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			HOUSING, LOCKNUT MAT'L/PLATING	BRASS/NICKEL
			GASKET MATERIAL	POLYETHYLENE
			RATED CURRENT [A]	28.0 A
			RATED VOLTAGE [V]	600 V
			OUTER JACKET MATERIAL/COLOR	TPE/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS	4x10 AWG
			TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K
			MAX. PANEL THICKNESS	11.0mm [0.43"]



END VIEW
LOCKNUT NOT SHOWN

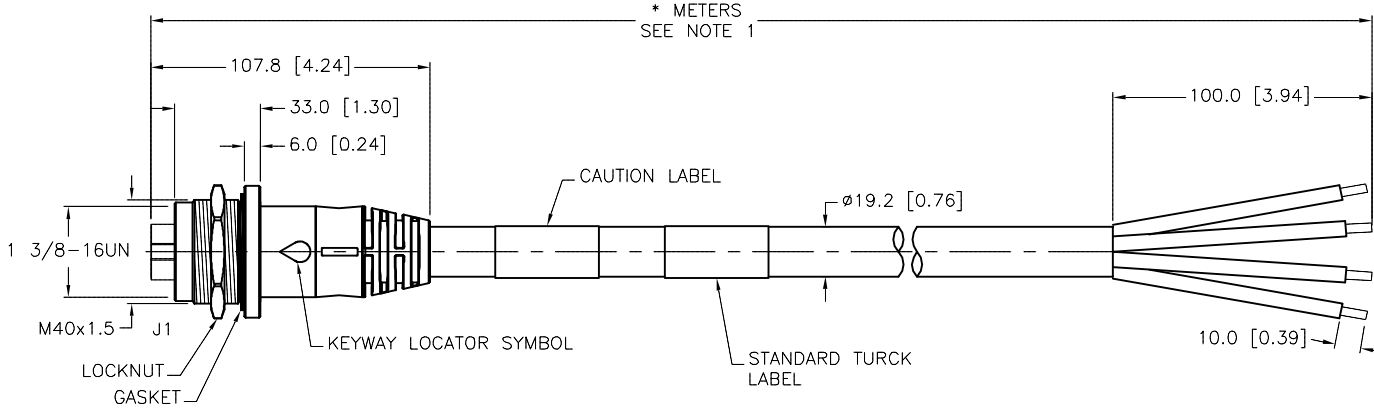

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER

STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED


NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT

RDS

DATE 10/06/10

APVD

SCALE 1=3.0

SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

FINISH

SEE SPECIFICATIONS

CONTACT TURCK FOR MORE INFORMATION

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

TURCK

DESCRIPTION

GKDMP 40-*M

IDENTIFICATION NO.

REV

FILE: 777024910

SHEET 1 OF 1