




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	TPU OR NYLON
1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK		1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	250 V
				OUTER CABLE JACKET MATERIAL/COLOR	TPE/GRAY
				CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
				NUMBER OF CONDUCTORS [AWG]	4x22 AWG
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

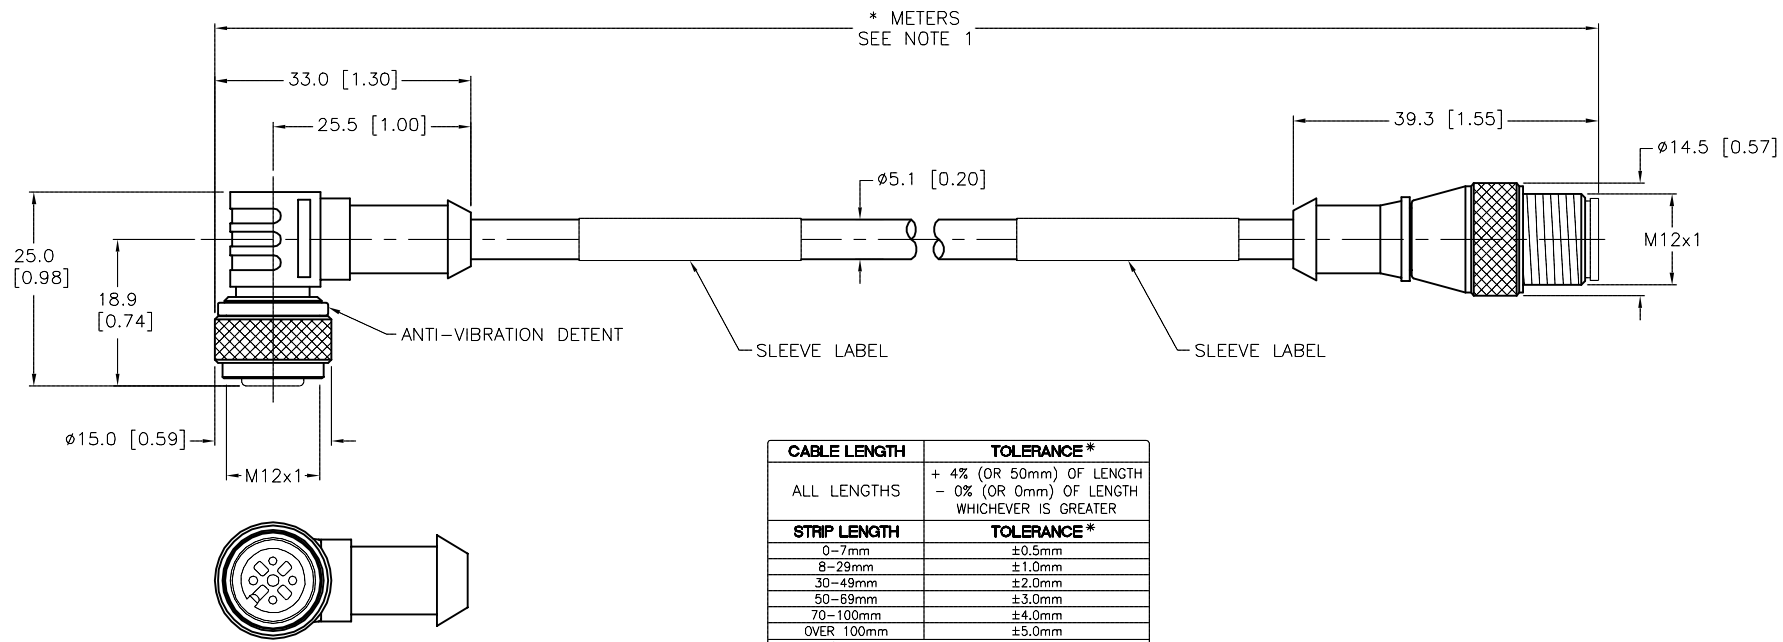

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S101" DESIGNATES FLEXLIFE-20 AND C-TRACK CABLE.
- "/CS12047" DESIGNATES SLEEVE FOR CABLE LABELING. ONE LABEL ON EACH END ADDED TO THIS PRODUCT.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.		2.		3.		4.	
MATERIAL		SEE SPECIFICATIONS		DRFT RDS		DATE 07/20/09	
FINISH		SEE SPECIFICATIONS		APVD		SCALE 1=1.0	
				UNIT OF MEASUREMENT		DESCRIPTION	
				MILLIMETER [INCH]		WK 4.4T-* -RS 4.4T/S101/CS12047	
				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
						REV	
						F	
						FILE: 777024939	
						SHEET 1 OF 1	

F	UPDATE SOURCE DRAWING-ADD CTRACK TO /S101 NOTE	CBM	02/18/14	44634
REV	DESCRIPTION	BY	DATE	ECO NO.