





MALE END VIEW (CCW)		FEMALE END VIEW (CW)		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL/COLOR	NYLON or PBT/GRAY
1 = PINK 2 = RED/BLUE 3 = BLUE 4 = RED 5 = GREEN 6 = YELLOW 7 = N/C 8 = GRAY 9 = N/C 10 = WHITE 11 = GRAY/PINK 12 = BROWN		1 = PINK 2 = RED/BLUE 3 = BLUE 4 = RED 5 = GREEN 6 = YELLOW 7 = N/C 8 = GRAY 9 = N/C 10 = WHITE 11 = GRAY/PINK 12 = BROWN		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
 M23 connector		 M23 connector		CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	2.0 A
				RATED VOLTAGE [V]	150 V
				OUTER JACKET MATERIAL/COLOR	PVC/BLACK
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	12x24 AWG
				DRAIN/SHIELD	26 AWG/ALUM.-POLYESTER FOIL & T-C BRAIDED
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	IEC IP67

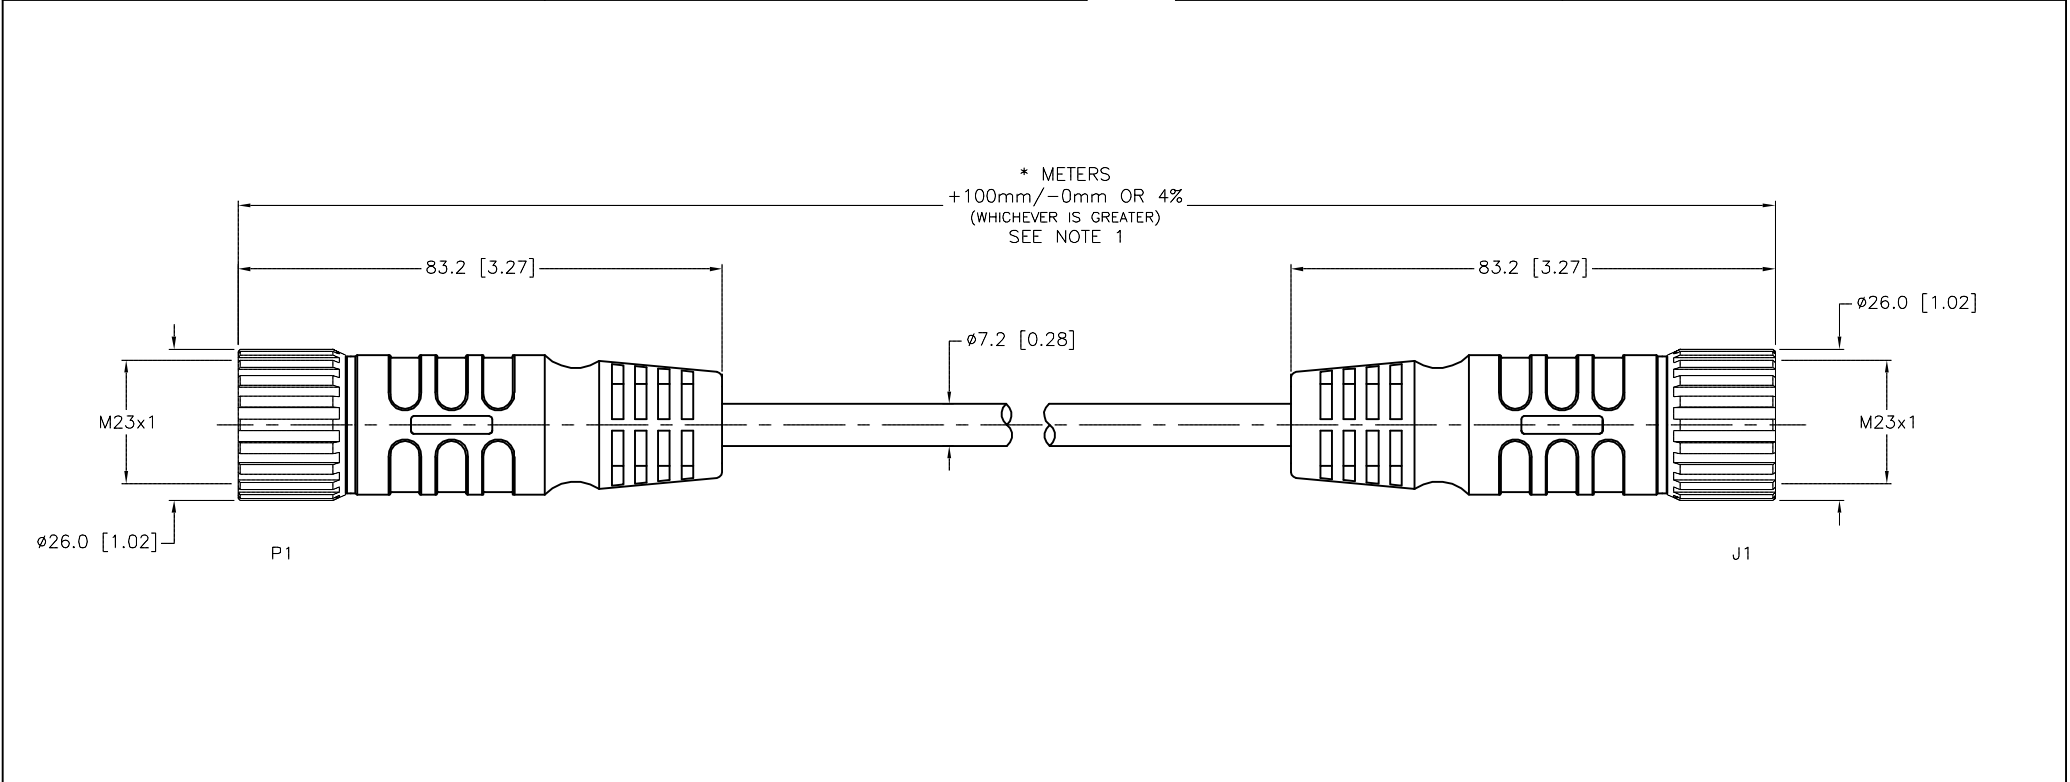

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 09/02/09		DESCRIPTION E-CSM CKM 12-931-*	
SEE SPECIFICATIONS		APVD		SCALE NONE										
					FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV D	
					SEE SPECIFICATIONS									
D		UPDATE CONDUCTOR COLORS			RDS	10/08/15	51897							
REV		DESCRIPTION			BY	DATE	ECO NO.		DO NOT SCALE THIS DRAWING		FILE: 777025182		SHEET 1 OF 1	