


SPECIFICATIONS						
CONTACT CARRIER MATERIAL	NYLON OR TPU					
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL					
RATED CURRENT [A]	2.0 A					
RATED VOLTAGE [V]	125 VAC/VDC					
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW					
CONDUCTOR INSULATION MATERIAL	PVC					
NUMBER OF CONDUCTOR [AWG]	3x24 AWG (TRUNK/BRANCHES)					
TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)					
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67					

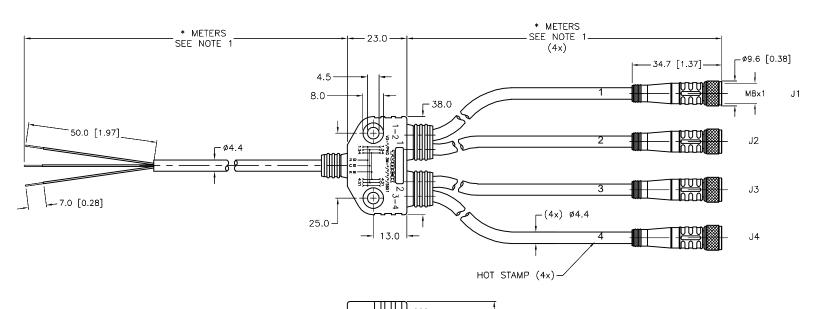

CABLE LENGTH	TOLERANCE*							
	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH							
ALL LENGTHS								
	WHICHEVER IS GREATER							
STRIP LENGTH	TOLERANCE*							
0-7mm	±0.5mm							
8-29mm	±1.0mm							
30-49mm	±2.0mm							
50-69mm	±3.0mm							
70-100mm	±4.0mm							
OVER 100mm	±5.0mm							
* UNLESS OT	* UNLESS OTHERWISE SPECIFIED							

SOURCE DRAWING - FOR REFERENCE ONLY

1. "*"	INDICATES	CABLE	LENGTH	IN	METERS.	CONTACT	TURCK	TO	ORDER	SPECIFIC
LENGT	HS.									

2. "/S651" DESIGNATES PARALLEL WIRING.

NOTES:

С	DRAWING	PROCESSED	AS I	PART	0F	ECO	33971	СВМ	04/07/11	33971
REV	DESCRIPTION	٧						BY	DATE	ECO NO.

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			
			RDS
	SCALE 1		
UNIT OF MEASUREMENT			
MILLIM	ETERS		
1	IAL AND THE (OF TURCK E OF THIS NT WITHOUT ERMISSION IS HBITED. RDS JNIT OF ME		

20.0 [0.79]

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

/03/09 V3-*/PKG 3M-*/*/*/\$651 1=1.5

NT IDENTIFICATION NO. REV FILE: 777025189 SHEET 1 OF 1 DO NOT SCALE THIS DRAWING