





SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK (P1), TPU/BLACK (J1)
MOLDED MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING (P1)	BRASS or COPPER/GOLD
CONTACT MATERIAL/PLATING (J1)	TeCU/GOLD
COUPLING NUT MATERIAL/PLATING (P1)	ALUMINUM/CLEAR-ANODIZED
COUPLING NUT MATERIAL/PLATING (J1)	BRASS/NICKEL
RATED CURRENT [A]	15 A
RATED VOLTAGE [V]	600 V
CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
NUMBERS OF CONDUCTORS [AWG]	4x14 AWG
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	IEC IP67

MALE END VIEW	FEMALE END VIEW
 (LONG) 1 = BLACK 2 = GREEN/YELLOW 3 = RED 4 = WHITE 	 1 = WHITE 2 = GREEN/YELLOW 3 = BLACK 4 = RED 

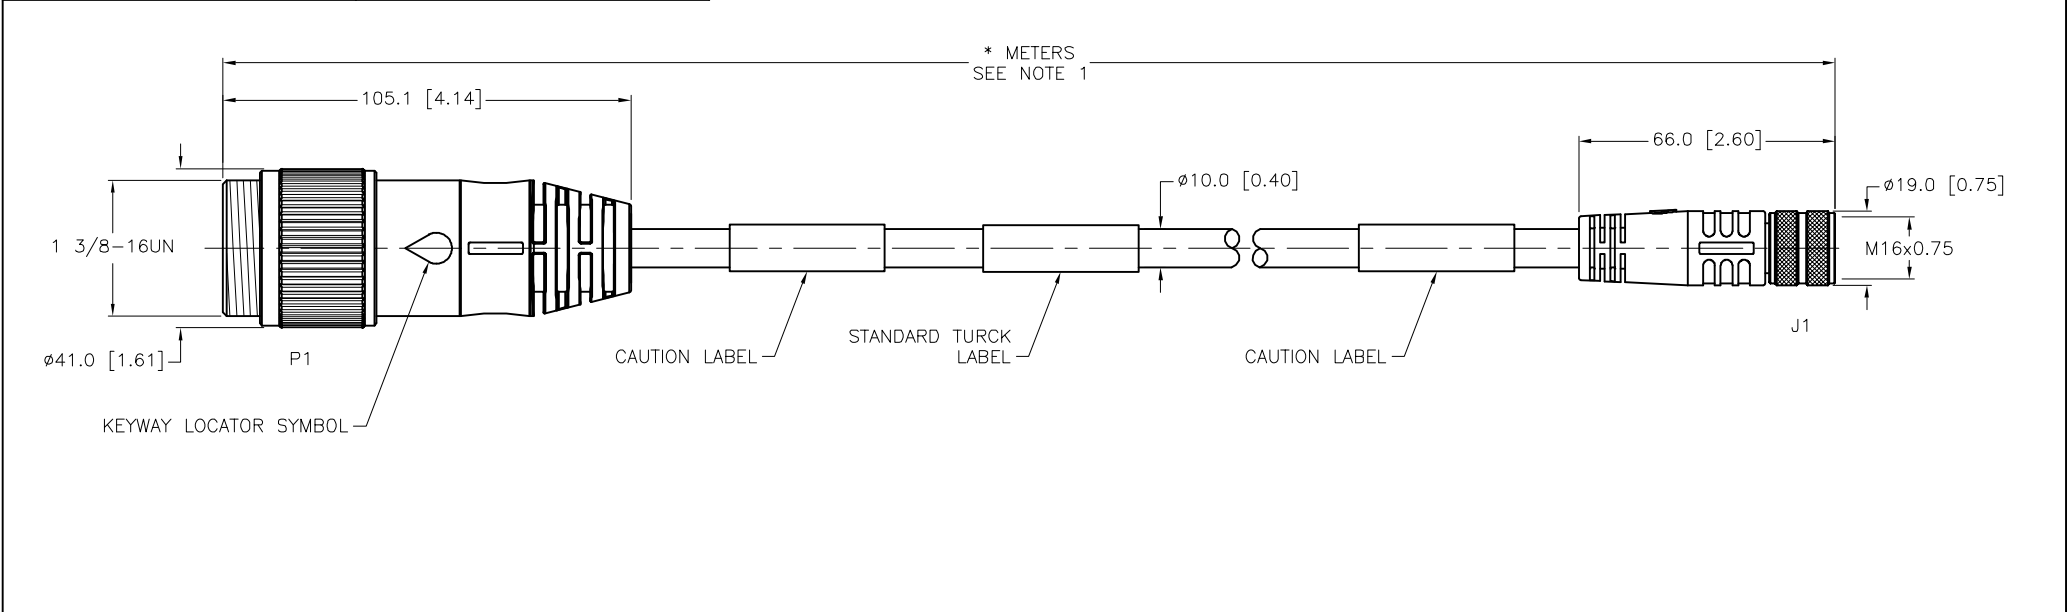

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S4000" DESIGNATES TC-ER CABLE.

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us						
1.				DRFT	RDS	DATE	09/10/09	DESCRIPTION GSDA BKM 44-*M/S4000				
2.				APVD	T.S.	SCALE	1=2.0					
3.				UNIT OF MEASUREMENT			IDENTIFICATION NO.					
4.				MILLIMETER [INCH]				REV D				
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		CONTACT TURCK FOR MORE INFORMATION				FILE: 777025217	SHEET 1 OF 1			
SEE SPECIFICATIONS												
FINISH												
SEE SPECIFICATIONS												
D	UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO	TV	08/15/17	60452								
REV	DESCRIPTION	BY	DATE	ECO NO.								