
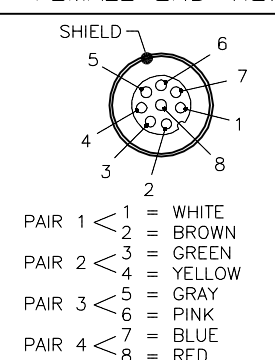
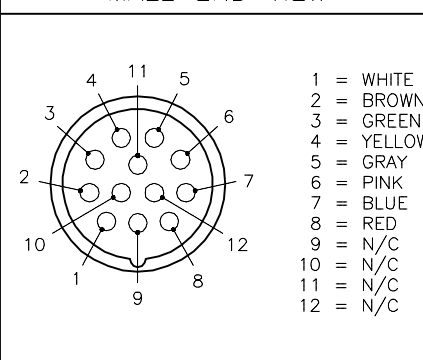
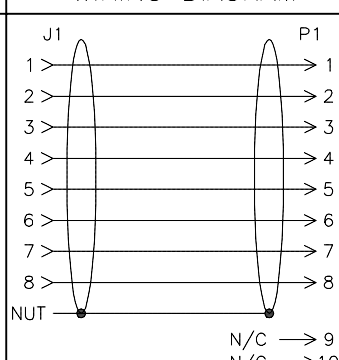
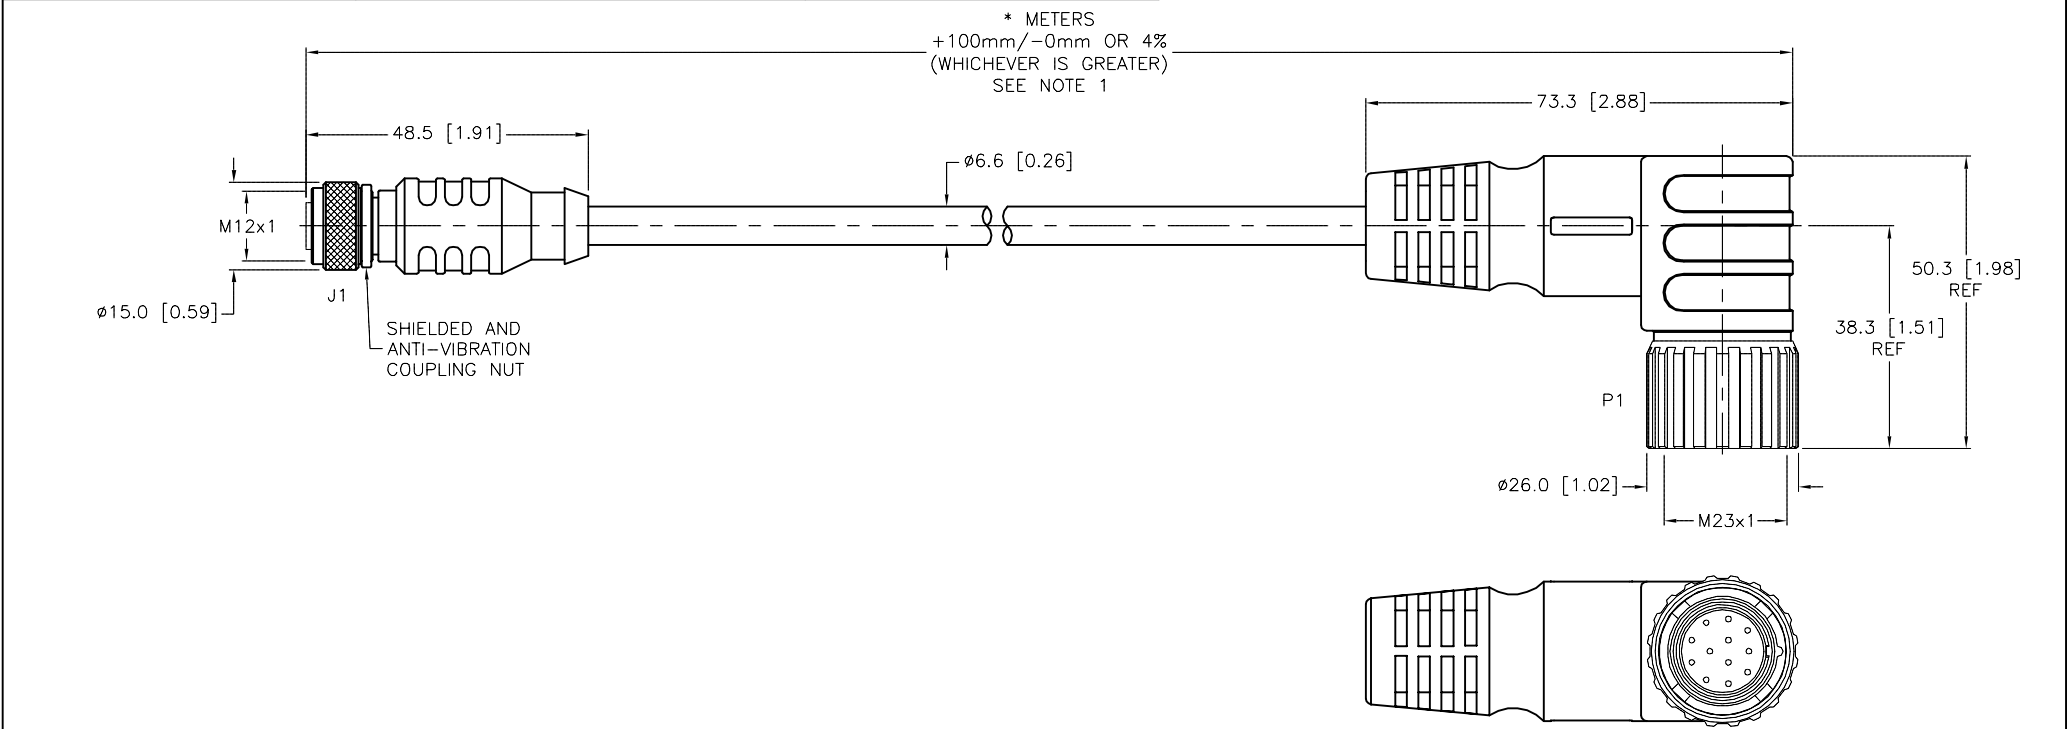


FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																									
			<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU (J1) NYLON OR PBT (P1)</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW (J1), BLACK (P1)</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>2.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>60 VAC/75 VDC</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>PVC/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>8x24 AWG (4 TWISTED PAIRS)</td></tr><tr><td>DRAIN/SHIELD</td><td>24 AWG/TINNED-COPPER BRAIDED</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON OR TPU (J1) NYLON OR PBT (P1)	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW (J1), BLACK (P1)	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	2.0 A	RATED VOLTAGE [V]	60 VAC/75 VDC	OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	8x24 AWG (4 TWISTED PAIRS)	DRAIN/SHIELD	24 AWG/TINNED-COPPER BRAIDED	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS IEC IP67	
CONTACT CARRIER MATERIAL	NYLON OR TPU (J1) NYLON OR PBT (P1)																											
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW (J1), BLACK (P1)																											
CONTACT MATERIAL/PLATING	BRASS/GOLD																											
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																											
RATED CURRENT [A]	2.0 A																											
RATED VOLTAGE [V]	60 VAC/75 VDC																											
OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK																											
CONDUCTOR INSULATION MATERIAL	PVC																											
NUMBER OF CONDUCTORS [AWG]	8x24 AWG (4 TWISTED PAIRS)																											
DRAIN/SHIELD	24 AWG/TINNED-COPPER BRAIDED																											
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																											
PROTECTION CLASS	MEETS IEC IP67																											



SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S3085" DESIGNATES SPECIAL WIRING.

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						DRFT RWC		DATE 09/16/09	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.3	
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS				SEE SPECIFICATIONS		MILLIMETER [INCH]		E-RKS 8T-264-*--CSWM 12/S3085	
SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV	
F UPDATE CABLE OD				CK 09/29/11		35510		F	
REV DESCRIPTION				BY DATE		ECO NO.		FILE: 777025256	
								SHEET 1 OF 1	