



MALE END VIEW




1 = BROWN	14 = WHITE
2 = WHITE/GREY	15 = BLUE
3 = BLUE/GREY	16 = BLACK/GREY
4 = BROWN/GREY	17 = BROWN/ORANGE
5 = BLACK/YELLOW	18 = WHITE/ORANGE
6 = WHITE/YELLOW	19 = BLACK/ORANGE
7 = BLUE/YELLOW	20 = BLACK/GREEN
8 = BROWN/YELLOW	21 = WHITE/GREEN
9 = BLACK/RED	22 = BLUE/GREEN
10 = WHITE/RED	23 = BROWN/GREEN
11 = BLUE/RED	24 = BLUE/ORANGE
12 = BROWN/RED	25 = GREEN/YELLOW
13 = BLACK	26 = N/C

FEMALE END VIEW



SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
RECEPTACLE HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	25x22 AWG
DRAIN/SHIELD	22 AWG/ALUMINUM-POLYESTER FOIL
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)
PROTECTION CLASS	IEC IP67
MOUNTING	Ø30.0 [1.18] HOLE

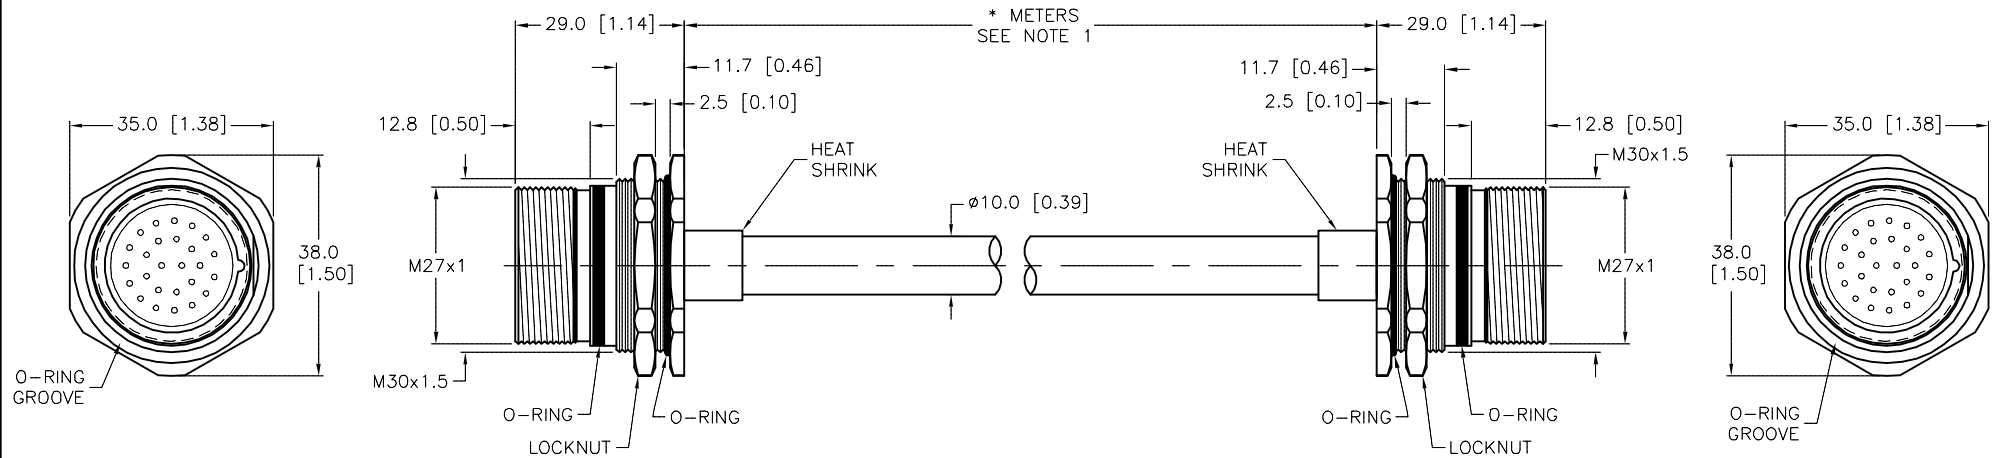

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S717" DESIGNATES RECEPTACLE WITH STANDARD CABLE.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. 2. 3. 4.							
MATERIAL		DRFT RDS		DATE 11/16/09		DESCRIPTION DSFD DKFD 26-25-*/S717	
SEE SPECIFICATIONS		APVD		SCALE 1=1.3			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV D	
SEE SPECIFICATIONS							
		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: 777025539	
						SHEET 1 OF 1	