


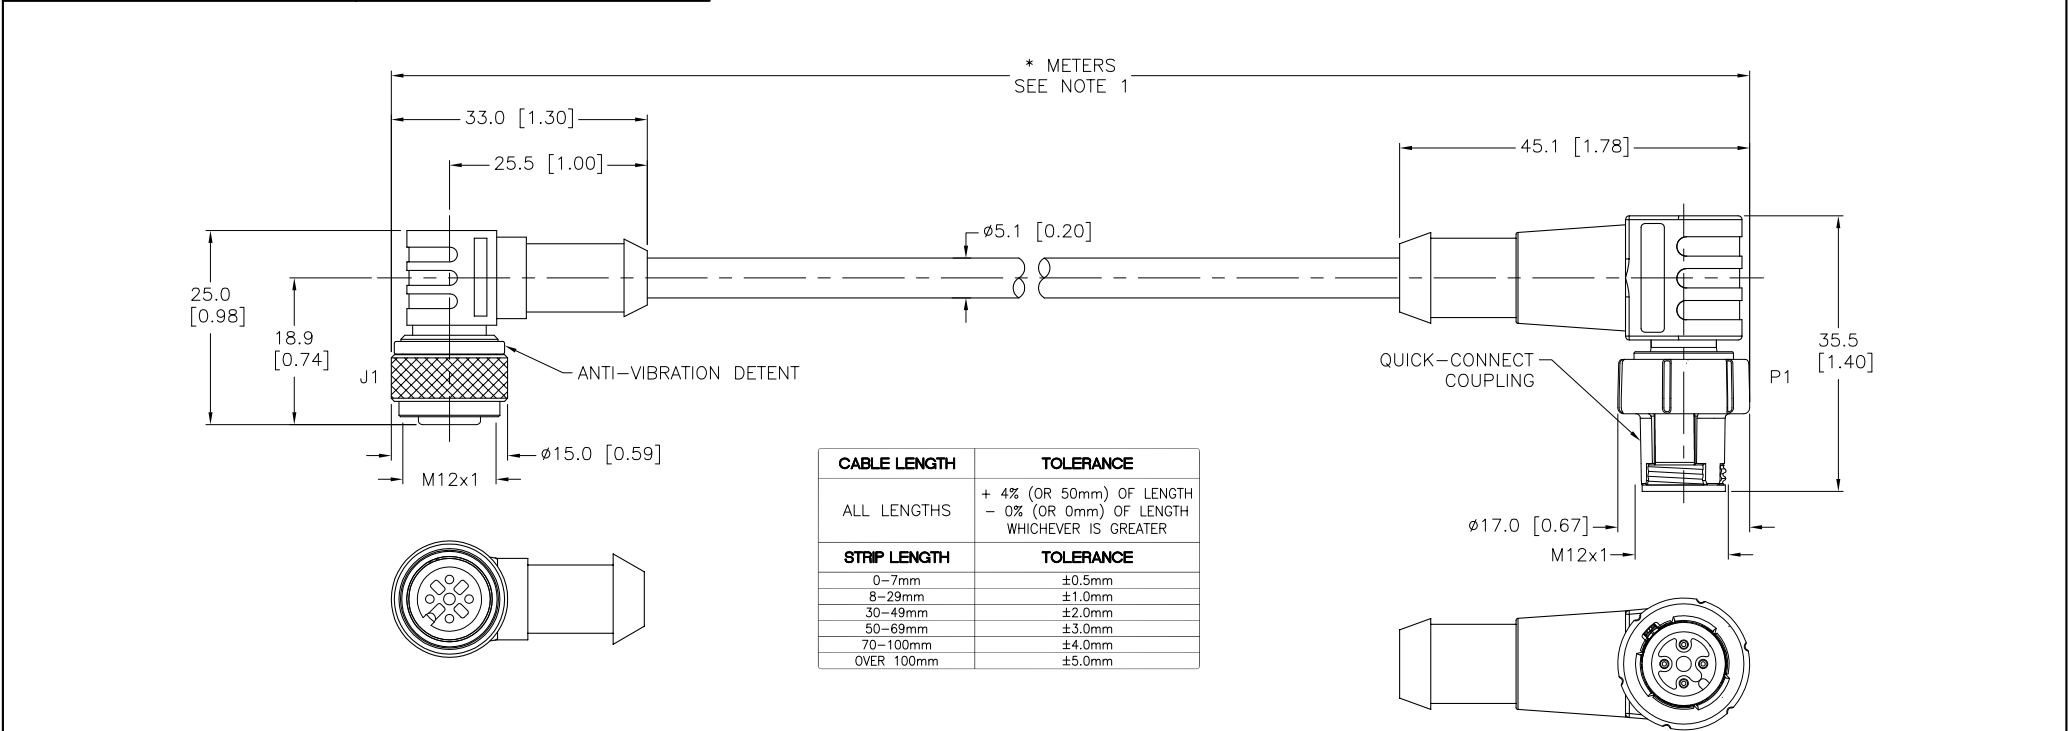


FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS																									
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL (J1)</td></tr><tr><td>SNAP-LOCK MATERIAL/COLOR</td><td>POM/BLACK (P1)</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>PVC/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x22 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (J1)	SNAP-LOCK MATERIAL/COLOR	POM/BLACK (P1)	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	4x22 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	IEC IP67	
CONTACT CARRIER MATERIAL	NYLON OR TPU																										
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW																										
CONTACT MATERIAL/PLATING	BRASS/GOLD																										
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (J1)																										
SNAP-LOCK MATERIAL/COLOR	POM/BLACK (P1)																										
RATED CURRENT [A]	4.0 A																										
RATED VOLTAGE [V]	250 V																										
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY																										
CONDUCTOR INSULATION MATERIAL	PVC																										
NUMBER OF CONDUCTORS [AWG]	4x22 AWG																										
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																										
PROTECTION CLASS	IEC IP67																										



SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S849" DESIGNATES 22 AWG CONDUCTORS.

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. 2. "/S849" DESIGNATES 22 AWG CONDUCTORS.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. 		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RWC		DATE 12/11/09		DESCRIPTION WK 4.4T-*—WSC 4.4Q/S849	
					SEE SPECIFICATIONS				DSGN		SCALE 1=1.0			
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT				IDENTIFICATION NO.		REV				
SEE SPECIFICATIONS				MILLIMETER [INCH]						C				
DO NOT SCALE THIS DRAWING						FILE: 777025656		SHEET 1 OF 1						

C	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/07/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.