


SPECIFICATIONS				
CONTACT CARRIER MATERIAL (EURO)	NYLON OR TPU/YELLOW			
MOLDED HEAD MATERIAL/COLOR (EURO)	TPU/YELLOW			
CONTACT MATERIAL/PLATING (EURO)	BRASS/GOLD			
HOUSING MATERIAL/PLATING (EURO)	BRASS/NICKEL			
RATED CURRENT [A]	1.0 A			
RATED VOLTAGE [V]	30 V			
OUTER CABLE JACKET MATERIAL/COLOR	PVC/BEIGE			
CONDUCTOR INSULATION MATERIAL	PE (DATA), SRPVC (POWER)			
NUMBER OF CONDUCTORS [AWG]	2x28 AWG (DATA), 2x24 AWG (POWER)			
SHIELDING	TINNED-COPPER BRAIDED			
TEMPERATURE RANGE	-40°C to +75°C (-40°F to +167°F)			
PROTECTION CLASS (EURO)	MEETS NEMA 1,3,4,6P AND IEC IP68			

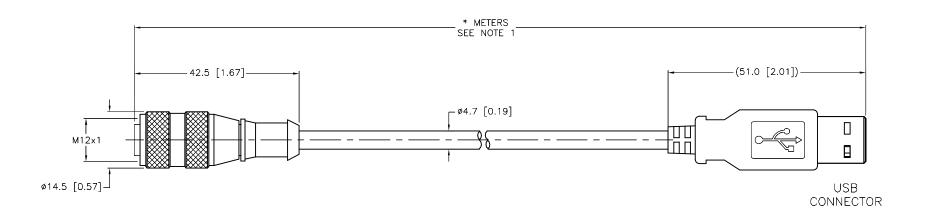

CABLE LENGTH	TOLERANCE*			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE*			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4,0mm			
OVER 100mm	±5.0mm			
* UNILESS OTHERWISE SPECIFIED				

NOTEC.

SOURCE DRAWING - FOR REFERENCE ONLY

NULES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2 CARLE ASSEMBLIES FOR ELIBORAST CONNECTORS ARE RATED AS STAND ALONE

2. CABLE ASSEMBLIES FOR EUROFA	ST CONNECTORS ARE RATED AS STAND ALONE.
OVERALL CABLE ASSEMBLY RATING I	IS THE RESPONSIBILITY OF THE CUSTOMER.

D	ADD NOTE 2	NF	02/04/20	75627
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		rck	3000 CAMPUS MINNEAPOLIS, MN 1-800-544- (763) 553-7 (763) 553-0 www.turck.t	N 55441 7769 7300)708 fax
MATERIAL			DATE 01/21/10	DESCRIPTION RK 4 4T-	-*-USB/AM	
	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD	SCALE 1=1.0	1(1(+.+1	OSD/ AIVI	
ENICH				IDENTIFICATION NO.		REV
FINISH	CONTACT TURCK FOR MORE INFORMATION	MILLIMETE	ER [INCH]			D
7		DO NOT SCALE	THIS DRAWING	FILE: 777025795	SHEET	1 OF