
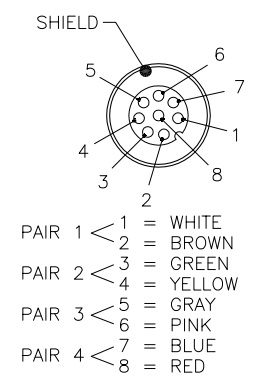
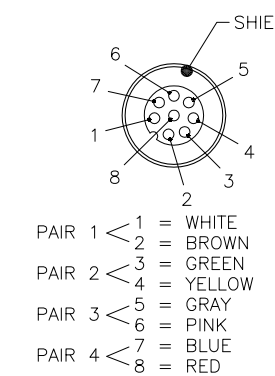


FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NYLON OR TPU
				MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				RATED CURRENT [A]	2.0 A
				RATED VOLTAGE [V]	60 VAC/75 VDC
				OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	8x24 AWG (4 TWISTED PAIRS)
				DRAIN/SHIELD	24 AWG/FOIL (PAIRS), T-C BRAID (OVERALL)
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS IEC IP67

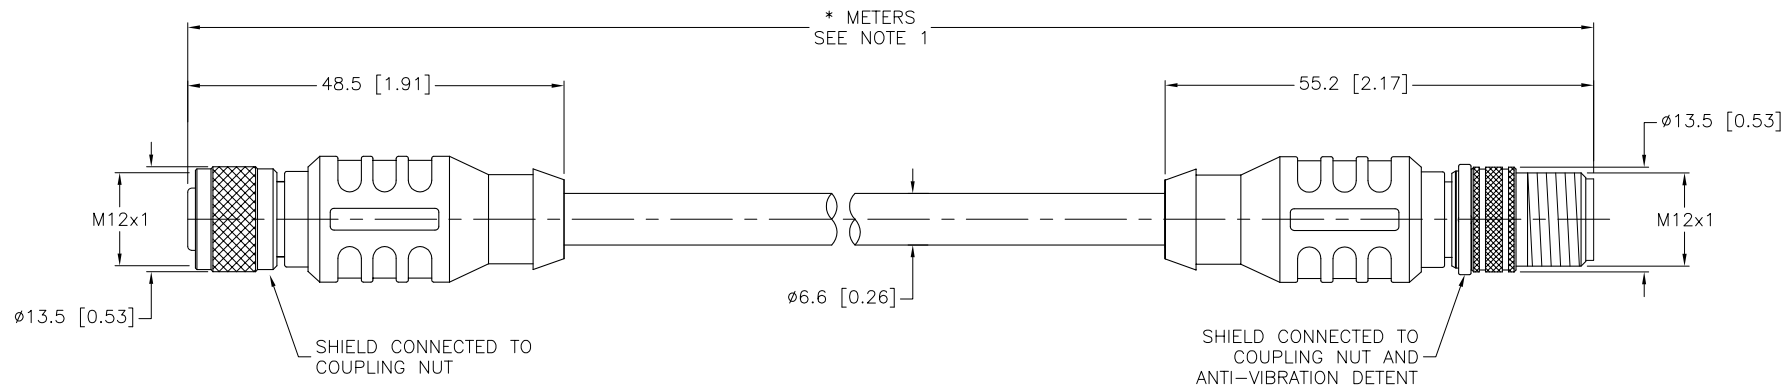


CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
1. 2. 3. 4.							
MATERIAL		DRFT RDS		DATE 03/17/10		DESCRIPTION E-RKSV 8T-264-*-RSSV 8T	
SEE SPECIFICATIONS		DSGN		SCALE 1=1.0			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV E	
SEE SPECIFICATIONS							
		DO NOT SCALE THIS DRAWING		FILE: 777026042		SHEET 1 OF 1	

E	UPDATE CABLE DIAMETER	RDS	08/10/11	35510
REV	DESCRIPTION	BY	DATE	ECO NO.