


SPECIFICATIONS					
CONTACT CARRIER MATERIAL	TPU				
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED				
RATED CURRENT [A]	4.0 A				
RATED VOLTAGE [V]	250 V				
OUTER JACKET MATERIAL/COLOR	PVC/PLUM				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS	4x18 AWG				
CONDUCTOR ARRANGEMENT	1 SHIELDED TRIAD W/DRAIN, 1 GROUND				
DRAIN/SHIELD	20 AWG DRAIN/ALUMINUM FOIL SHIELD				
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68				
CABLE RATINGS	UL: ITC/PLTC/AWM, 105C, 300 V				
	CSA: CMX-OUTDOOR-CMG/AWM, 105C, 300V				

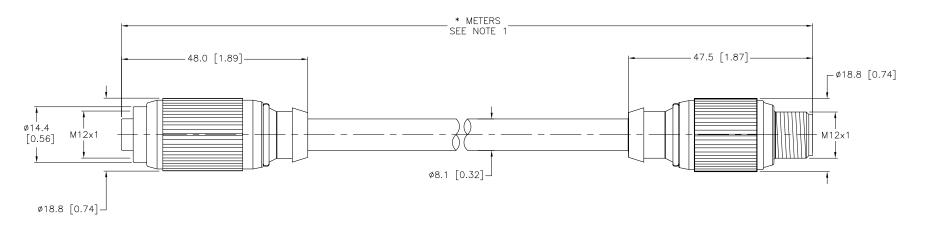

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

В	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/07/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RCK InC Sensors and Automation Controls	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com
MATERIAL		DRFT *CK	DATE 06/29/10	DESCRIPTION TO A TO	* DCOV 5 1T
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN	SCALE 1=1.0	P-RKGV 5.1T-108	-*-KSGV 5.11
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.	l REV
FINISH				IDENTIFICATION NO.	KEV
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETE	ER [INCH]		B
		DO NOT SCALE THIS DRAWING		FILE: 777026446	SHEET 1 OF 1
		-			