



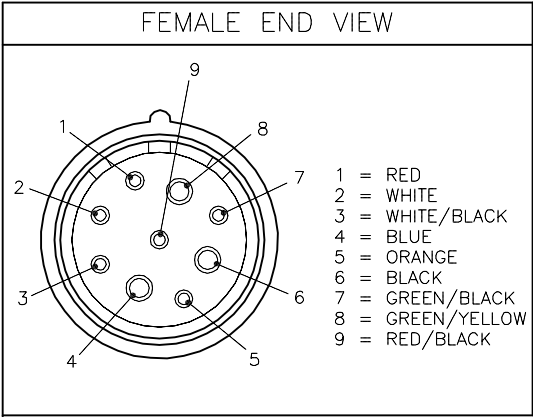

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	NYLON or PBT/GRAY
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	20.0 A MAX (PINS 4,6,8)
	8.0 A MAX (PINS 1,2,3,5,7,9)
RATED VOLTAGE [V]	150 V
OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	3x14 AWG; 6x18 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS IEC IP67

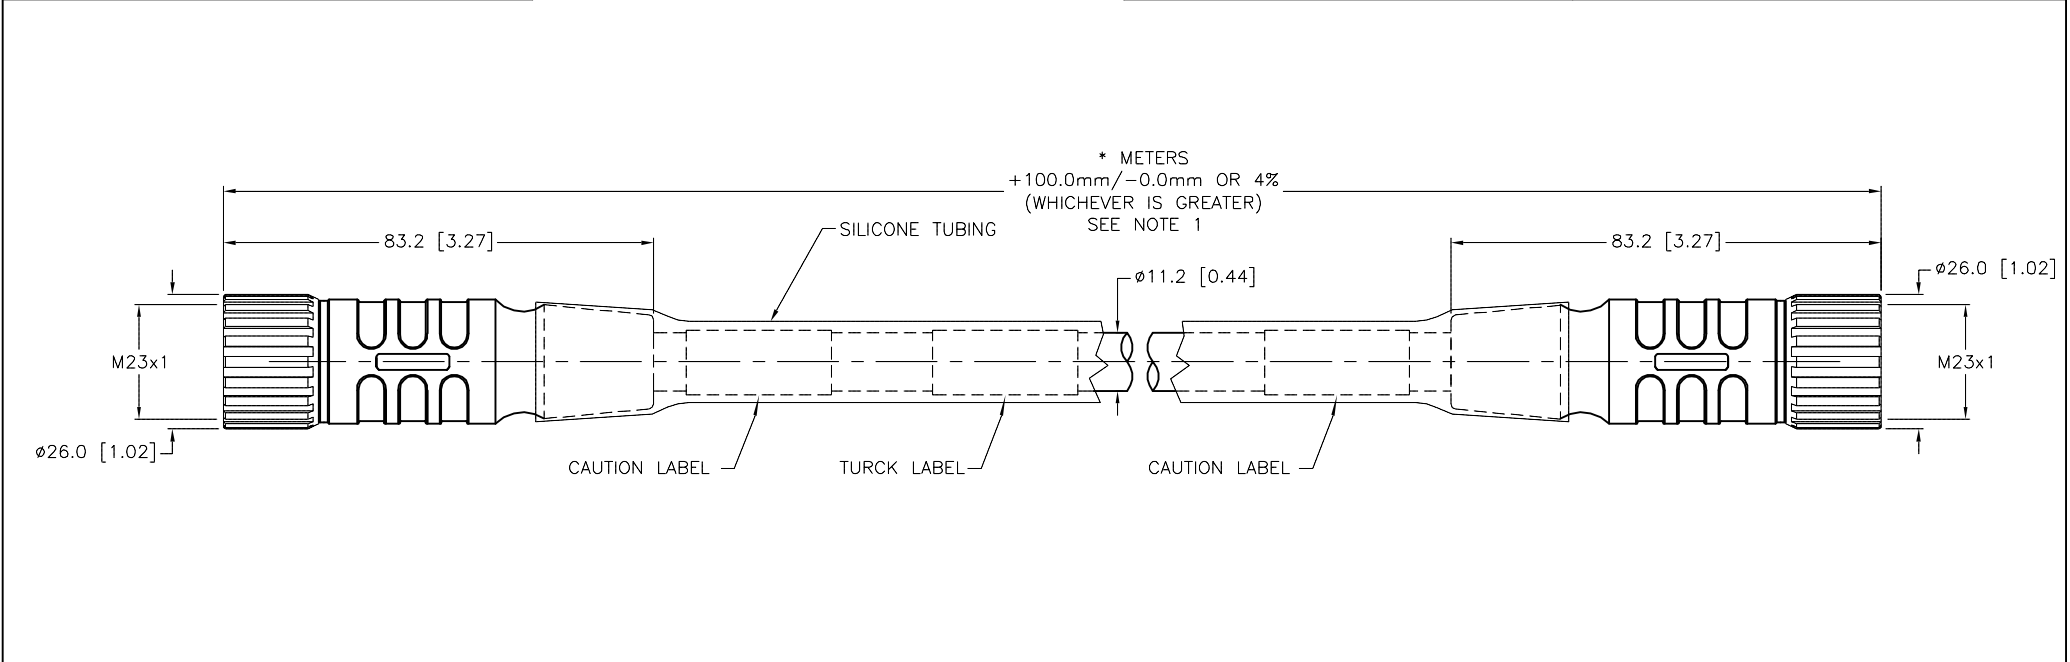

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD


SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S1077" DESIGNATES SILICONE TUBING PLACED OVER CABLE JACKET. TUBING TO BE ASSEMBLED OVER CABLE JACKET PRIOR TO SOLDERING/CRIMPING ENDS & MAXIMUM LENGTH OF 4 METERS; MINIMUM LENGTH OF 0.5 METERS ON EXTENSIONS. (CONTACT MFG TO VERIFY SHORTER/LONGER LENGTHS)

F	UPDATE CONDUCTOR TO GREEN/YELLOW	RDS	07/12/17	60799
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
	MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	RDS	DATE 12/15/10	DESCRIPTION CKMV CKMV 94-080-*/S1077
FINISH SEE SPECIFICATIONS	APVD			SCALE 1=1.5		
	UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING			IDENTIFICATION NO.		REV F
			FILE: 777027050			SHEET 1 OF 1