


_		
	SPECIFICATIONS	
	CONTACT CARRIER MATERIAL	NYLON or TPU
	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
	CONTACT MATERIAL/PLATING	BRASS/GOLD
	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
	RATED CURRENT [A]	2.0 A
	RATED VOLTAGE [V]	125 VAC/VDC
	OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
	CONDUCTOR INSULATION MATERIAL	PVC
	NUMBER OF CONDUCTORS [AWG]	4x26 AWG
	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

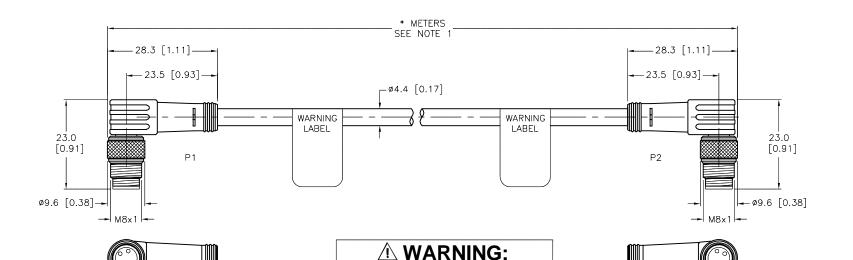

ELECTRICAL SHOCK HAZARD CONNECTOR IS TO BE IN THE THE MATED STATE WHILE ENERGIZED REMOVE POWER BEFORE SERVICING.

RELATED DOCUMENTS

2. 3.

CABLE LENGTH	TOLERANCE *		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
STRIP LENGTH	TOLERANCE *		
0-7mm	±0.5mm		
8-29mm	±1.0mm		
30-49mm	±2.0mm		
50-69mm	±3.0mm		
70-100mm	±4.0mm		
OVER 100mm	±5.0mm		
* UNLESS OTHERWISE SPECIFIED			

## NOTES:

REV DESCRIPTION

C ADD LABEL PER ECO

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

TV 01/31/18

DATE

ECO NO.

	4.	PROHIBITED.	
	MATERIAL		DRFT RDS
?	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME
	FINISH	CONTACT TURCK	MILLIMETE
63893	SEE SPECIFICATIONS	FOR MORE INFORMATION	

3RD ANGLE PROJECTION

 $\bigoplus$ 

THIS DRAWING IS

## SOURCE DRAWING - FOR REFERENCE ONLY

3000 CAMPUS DRIVE

	CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		MINNEAPOLIS, MN 1-800-554-7 (763) 553-07 (763) 553-07 www.turck.u	769 300 708 fax
	DRFT RDS	DATE 01/19/11 SCALE 1=1.0	PSW 4M-*-PSW 4M	
UNIT OF MEASUREMENT  MILLIMETER [ INCH ]			IDENTIFICATION NO.	REV
		THIS DRAWING	FILE: 777027192 SHEET	1 OF 1
			<u> </u>	