




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS																									
 1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE 8 = RED 	 1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE 8 = RED 	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPV</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPV/WHITE</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>RATED CURRENT [A]</td><td>2.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>60 VAC/75 VDC</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>TPV/WHITE</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>POLYESTER ELASTOMER</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>8x24 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP68</td></tr><tr><td>O-RING MATERIAL</td><td>FKM/FPM</td></tr></table>	CONTACT CARRIER MATERIAL	TPV	MOLDED HEAD MATERIAL/COLOR	TPV/WHITE	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	RATED CURRENT [A]	2.0 A	RATED VOLTAGE [V]	60 VAC/75 VDC	OUTER CABLE JACKET MATERIAL/COLOR	TPV/WHITE	CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER	NUMBER OF CONDUCTORS [AWG]	8x24 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68	O-RING MATERIAL	FKM/FPM	
CONTACT CARRIER MATERIAL	TPV																										
MOLDED HEAD MATERIAL/COLOR	TPV/WHITE																										
CONTACT MATERIAL/PLATING	BRASS/GOLD																										
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																										
RATED CURRENT [A]	2.0 A																										
RATED VOLTAGE [V]	60 VAC/75 VDC																										
OUTER CABLE JACKET MATERIAL/COLOR	TPV/WHITE																										
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER																										
NUMBER OF CONDUCTORS [AWG]	8x24 AWG																										
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																										
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68																										
O-RING MATERIAL	FKM/FPM																										

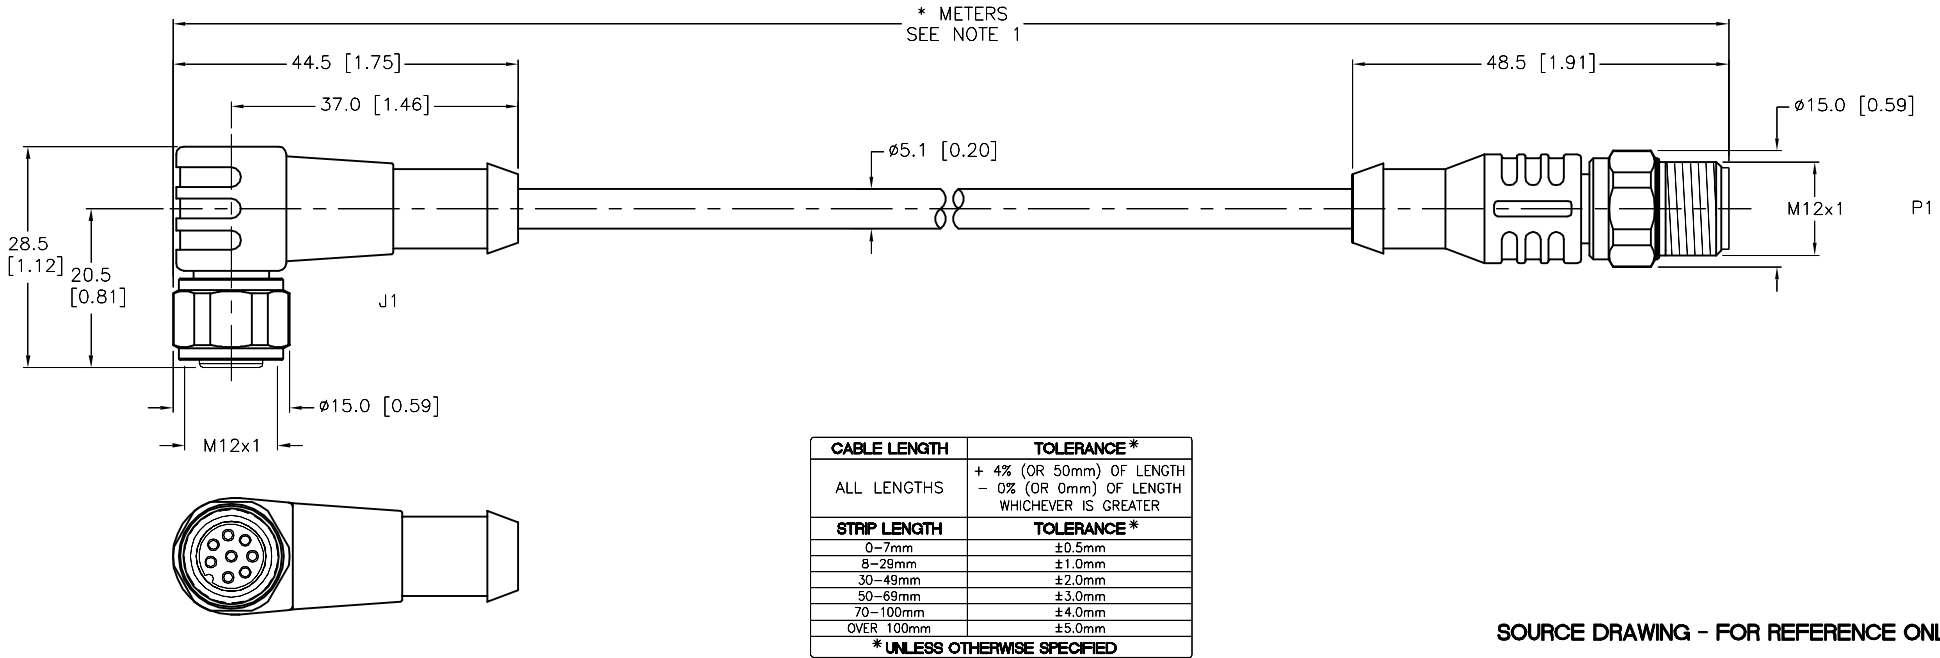

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

F	UPDATED SEALING MATERIAL PER ECO	TV	08/11/16	56141
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us							
1. 2. 3. 4.											
MATERIAL		DRFT CK		DATE 02/02/11		DESCRIPTION					
SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.0		WD-WKCV 8T-*--RSCV 8T			
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV F	
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING				FILE: 777027249				SHEET 1 OF 1	