

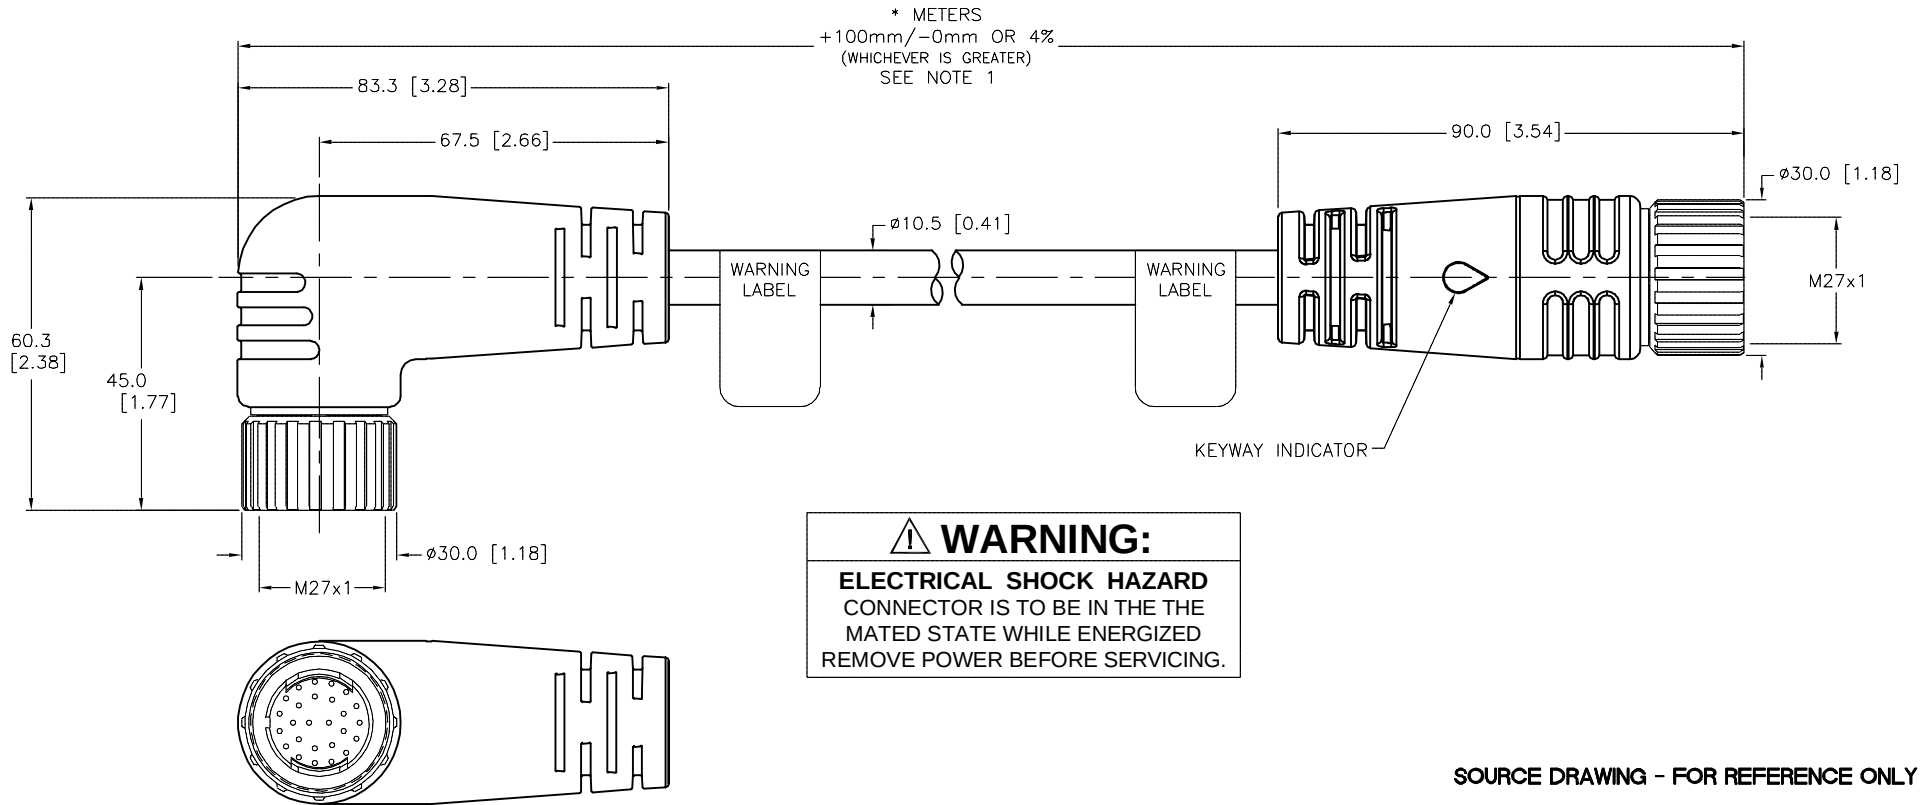
MALE END VIEW



1 = BROWN	15 = BLUE
2 = WHITE/GRAY	16 = BLACK/GRAY
3 = BLUE/GRAY	17 = BROWN/ORANGE
4 = BROWN/GRAY	18 = WHITE/ORANGE
5 = BLACK/YELLOW	19 = BLACK/ORANGE
6 = WHITE/YELLOW	20 = BLACK/GREEN
7 = BLUE/YELLOW	21 = WHITE/GREEN
8 = BROWN/YELLOW	22 = BLUE/GREEN
9 = BLACK/RED	23 = BROWN/GREEN
10 = WHITE/RED	24 = BLUE/ORANGE
11 = BLUE/RED	25 = GREEN/YELLOW
12 = BROWN/RED	26 = GRAY
13 = BLACK	27 = ORANGE
14 = WHITE	28 = N/C




DRAIN/SHIELD

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON or PBT
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	27x22 AWG
DRAIN/SHIELD	22 AWG/ALUM.-POLYESTER FOIL
TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
PROTECTION CLASS	IEC IP67



1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

C	ADD LABEL PER ECO	TV	01/31/18	63893
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	CK	DATE	02/11/11	DESCRIPTION DSWM DSM 28-061-*
SEE SPECIFICATIONS			APVD		SCALE	1=1.5	
FINISH			CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		
SEE SPECIFICATIONS	MILLIMETER [INCH]						
			DO NOT SCALE THIS DRAWING			FILE: 777027290	SHEET 1 OF 1