


SPECIFICATIONS		
CONTACT CARRIER MATERIAL	NYLON or TPU	
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	
CONTACT MATERIAL/PLATING	BRASS/GOLD	
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	
RATED CURRENT [A]	4.0 A	
RATED VOLTAGE [V]	250 V	
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY	
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS [AWG]	4x22 AWG	
DRAIN/SHIELD	24 AWG DRAIN/ALUMINUM FOIL SHIELD	
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68	

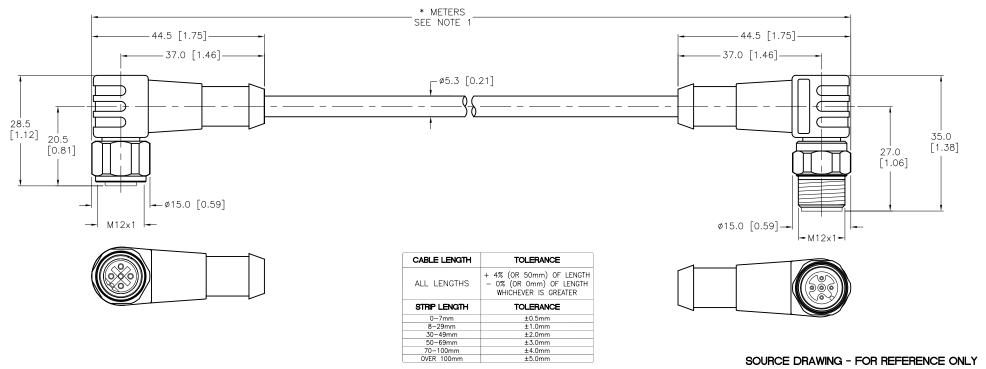

NOTES:

DESCRIPTION

UPDATE CABLE DIAMETER

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S653" DESIGNATES CABLE WITH FOIL SHIELD AND DRAIN. DRAIN IS CONNECTED TO A PIN AT THE CONNECTOR.

		MATERIAL		
			SPECIFICATIONS	
		FINISH		
12	37153	SEE	SPECIFICATIONS	

ECO NO.

KMY

04/12/

DATE

2.

3.

RELATED DOCUMENTS

ALL DIMENSIONS **SPECIFICATIONS**

DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE

3RD ANGLE PROJECTION

APVD INFORMATION

turck inc

High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com

SHEET 1 OF 1

DATE 02/24/1 RDS SCALE 1=1.0 UNIT OF MEASUREMENT

WKCV 4.5T-*-WSCV 4.5T/S653

FILE: 777027341

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

THIS DRAWING IS CONFIDENTIAL AND THE

PROPERTY OF TURCK INC. USE OF THIS

DOCUMENT WITHOUT WRITTEN PERMISSION IS

PROHIBITED.

IDENTIFICATION NO. REV