


FEMALE END VIEW (CW)




1 = WHITE	PAIR 1
2 = BROWN	
3 = GREEN	PAIR 2
4 = YELLOW	
5 = GRAY	PAIR 3
6 = PINK	
7 = BLUE	PAIR 4
8 = RED	
9 = BLACK	PAIR 5
10 = VIOLET	
11 = PINK/GRAY	PAIR 6
12 = RED/BLUE	



M23 connector (CW)

SPECIFICATIONS


CONTACT CARRIER MATERIAL	NYLON or PBT
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	PVC/GRAY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	12x26 AWG, 26 AWG DRAIN
SHIELD/BRAID	ALUM.-POLYESTER FOIL/36 AWG T-C BRAID
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	IEC IP67

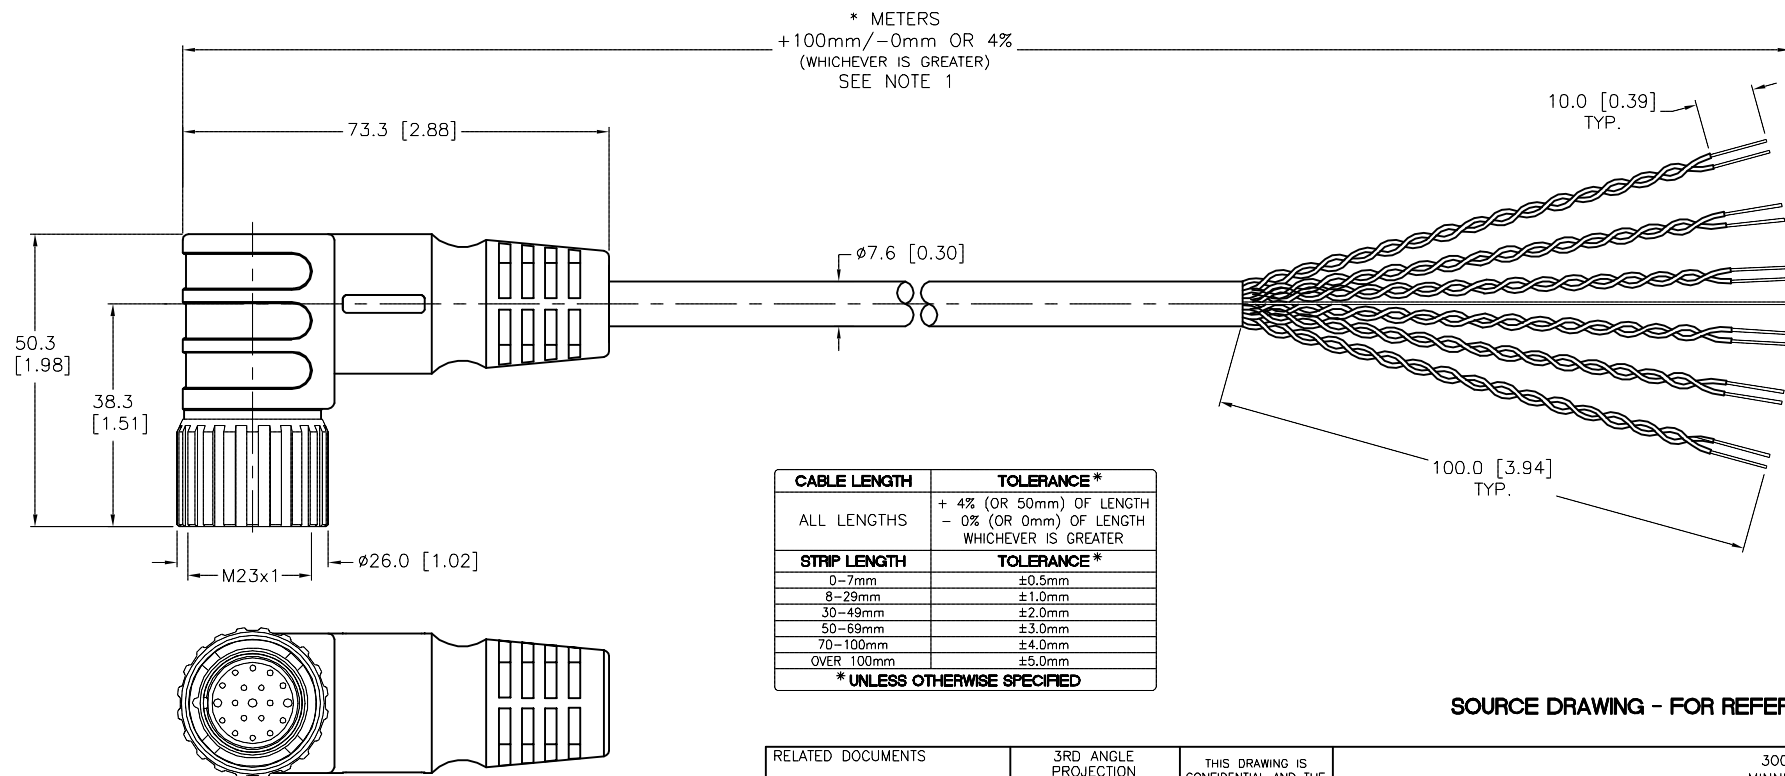

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			TURCK	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
	MATERIAL	DRFT	RDS					DATE	03/02/11	DESCRIPTION E-CKWM 12-1687-*/A
	SEE SPECIFICATIONS	APVD						SCALE	1=1.3	
FINISH	UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.	REV C				
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION						FILE: 777027359	SHEET 1 OF 1		
		DO NOT SCALE THIS DRAWING								

C	UPDATE CABLE OD	NF	09/22/16	48337
REV	DESCRIPTION	BY	DATE	ECO. NO.