



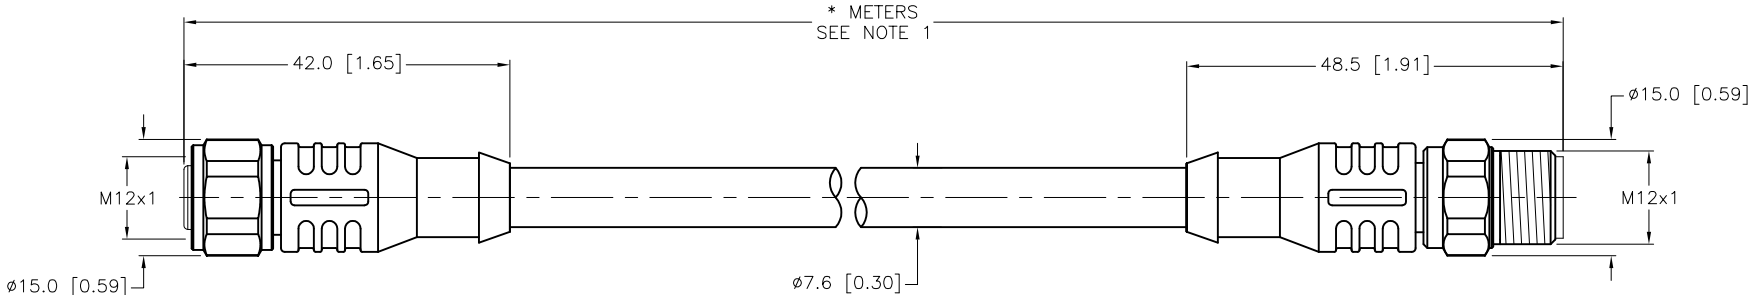



| MALE END VIEW | FEMALE END VIEW | SPECIFICATIONS | |
|--|---|-----------------------------------|-----------------------------------|
|  <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GREEN/YELLOW</p>  |  <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GREEN/YELLOW</p>  | CONTACT CARRIER MATERIAL | NYLON OR TPU |
| | | MOLDED HEAD MATERIAL/COLOR | TPU/YELLOW |
| | | CONTACT MATERIAL/PLATING | BRASS/GOLD |
| | | COUPLING NUT MATERIAL/FINISH | STAINLESS STEEL/PASSIVATED |
| | | RATED CURRENT [A] | 4.0 A |
| | | RATED VOLTAGE [V] | 250 V |
| | | OUTER CABLE JACKET MATERIAL/COLOR | PVC/YELLOW |
| | | CONDUCTOR INSULATION MATERIAL | PVC |
| | | NUMBER OF CONDUCTORS [AWG] | 5x18 AWG |
| | | TEMPERATURE RANGE | -40°C to +105°C (-40°F to +221°F) |
| | | PROTECTION CLASS | MEETS NEMA 1,3,4,6P AND IEC IP68 |

| | | | | | |
|--|--|--|--|--|--|
|  | | <div> <div> <div>CABLE LENGTH</div> <div>TOLERANCE</div> </div> <div> <div>ALL LENGTHS</div> <div>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</div> </div> <div> <div>STRIP LENGTH</div> <div>TOLERANCE</div> </div> <div> <div>0-7mm</div> <div>±0.5mm</div> </div> <div> <div>8-29mm</div> <div>±1.0mm</div> </div> <div> <div>30-49mm</div> <div>±2.0mm</div> </div> <div> <div>50-69mm</div> <div>±3.0mm</div> </div> <div> <div>70-100mm</div> <div>±4.0mm</div> </div> <div> <div>OVER 100mm</div> <div>±5.0mm</div> </div> </div> | | <div> <div>RELATED DOCUMENTS</div> <div> <div>1.</div> <div>2.</div> <div>3.</div> <div>4.</div> </div> <div> <div>MATERIAL</div> <div>SEE SPECIFICATIONS</div> </div> <div> <div>FINISH</div> <div>SEE SPECIFICATIONS</div> </div> </div> <div> <div>3RD ANGLE PROJECTION</div> <div>  </div> <div> <div>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</div> <div>CONTACT TURCK FOR MORE INFORMATION</div> </div> </div> <div> <div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div> <div>DRFT</div> <div>RDS</div> </div> <div> <div>DATE</div> <div>03/25/11</div> </div> <div> <div>APVD</div> <div>SCALE 1=1.0</div> </div> <div> <div>UNIT OF MEASUREMENT</div> <div>MILLIMETER [INCH]</div> </div> <div>DO NOT SCALE THIS DRAWING</div> </div> <div> <div> <div>TURCK INC</div> <div>High Technology Sensors and Automation Controls</div> </div> <div> <div>3000 CAMPUS DRIVE</div> <div>MINNEAPOLIS, MN 55441</div> <div>1-800-544-7769</div> <div>(763) 553-7300</div> <div>(763) 553-0708 fax</div> <div>turck.com</div> </div> <div> <div>DESCRIPTION</div> <div>RKCV 4.5T-*--RSCV 4.5T/CS10288</div> </div> <div> <div>IDENTIFICATION NO.</div> <div>FILE: 777027469</div> </div> <div> <div>REV</div> <div>B</div> </div> <div> <div>SHEET 1 OF 1</div> </div> </div> | |
|--|--|--|--|--|--|