






FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
					
<p>1 = BROWN 2 = DRAIN 3 = BLUE 4 = GREEN/YELLOW</p>		<p>1 = BROWN 2 = DRAIN 3 = BLUE 4 = GREEN/YELLOW</p>			
					
				CONTACT CARRIER MATERIAL NYLON or TPU	
				MOLDED HEAD MATERIAL/COLOR TPU/BLACK	
				CONTACT MATERIAL/PLATING BRASS/GOLD	
				COUPLING NUT MATERIAL/FINISH STAINLESS STEEL/PASSIVATED	
				RATED CURRENT [A] 4.0 A	
				RATED VOLTAGE [V] 250 V	
				OUTER JACKET MATERIAL/COLOR PVC/BLACK	
				CONDUCTOR INSULATION MATERIAL PVC/NYLON (NYLON OVERCOAT)	
				NUMBER OF CONDUCTORS [AWG] 3x18 AWG	
				DRAIN/SHIELD 20 AWG/ALUMINUM-POLYESTER FOIL	
				TEMPERATURE RATING -40°C to +105°C (-40°F to +221°F)	
				PROTECTION CLASS NEMA 1,3,4,6P AND IEC IP68, IP69K	
				CONDUCTOR ARRANGEMENT 1 SHIELDED TWISTED PAIR, 1 GROUND, 1 DRAIN	
				CABLE RATINGS UL: ITC-ER/PLTC-ER, DIRECT BURIAL, 105C CSA: CIC, 90C, 600V C(UL): 245/1309 MARINE SHIPBOARD & IEEE 1580	




CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

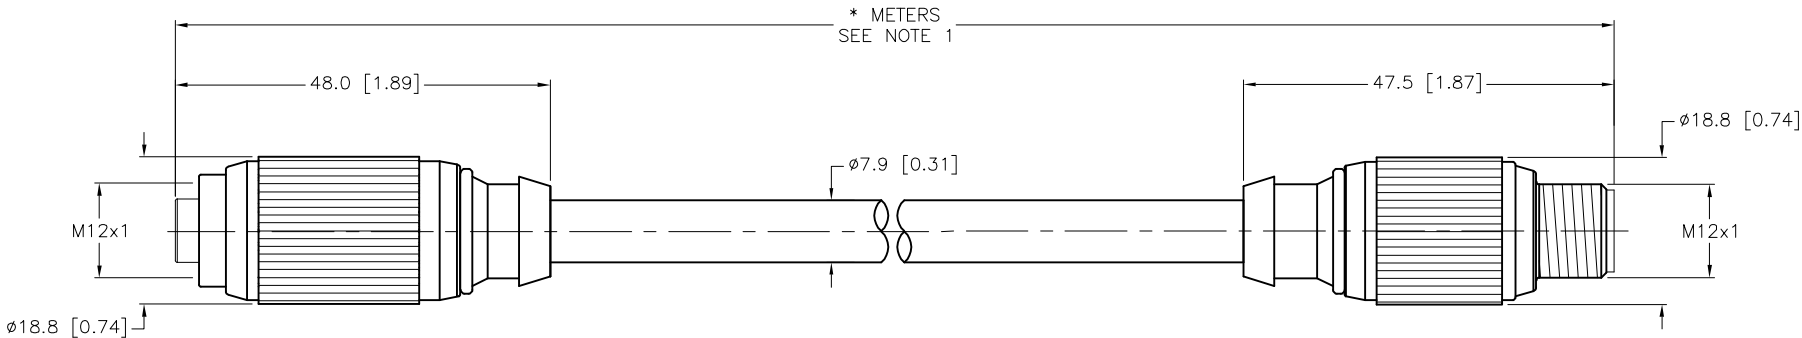1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.					3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS					DRFT RDS APVD		DATE 03/30/11 SCALE 1=1.0		DESCRIPTION P-RKGV 4.05T-330-*--RSGV 4.05T	
FINISH SEE SPECIFICATIONS					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	
DO NOT SCALE THIS DRAWING					FILE: 777027500		REV D		SHEET 1 OF 1	

D	UPDATED CABLE OD	AS	04/26/24	80100
REV	DESCRIPTION	BY	DATE	ECO NO.