


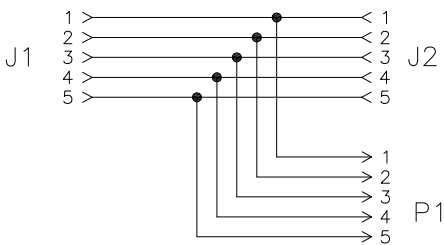


FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																									
			<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON or TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLUE-GRAY</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPU/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PE (DATA), PVC (POWER)</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>2x17 AWG, 2x20 AWG, 20 AWG DRAIN</td></tr><tr><td>SHIELDING</td><td>FOIL (PAIRS), ALUM.-POLYESTER FOIL (OVERALL)</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +80°C (-40°F to +176°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON or TPU	MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER JACKET MATERIAL/COLOR	TPU/GRAY	CONDUCTOR INSULATION MATERIAL	PE (DATA), PVC (POWER)	NUMBER OF CONDUCTORS [AWG]	2x17 AWG, 2x20 AWG, 20 AWG DRAIN	SHIELDING	FOIL (PAIRS), ALUM.-POLYESTER FOIL (OVERALL)	TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	
CONTACT CARRIER MATERIAL	NYLON or TPU																											
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY																											
CONTACT MATERIAL/PLATING	BRASS/GOLD																											
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																											
RATED CURRENT [A]	4.0 A																											
RATED VOLTAGE [V]	250 V																											
OUTER JACKET MATERIAL/COLOR	TPU/GRAY																											
CONDUCTOR INSULATION MATERIAL	PE (DATA), PVC (POWER)																											
NUMBER OF CONDUCTORS [AWG]	2x17 AWG, 2x20 AWG, 20 AWG DRAIN																											
SHIELDING	FOIL (PAIRS), ALUM.-POLYESTER FOIL (OVERALL)																											
TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)																											
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																											

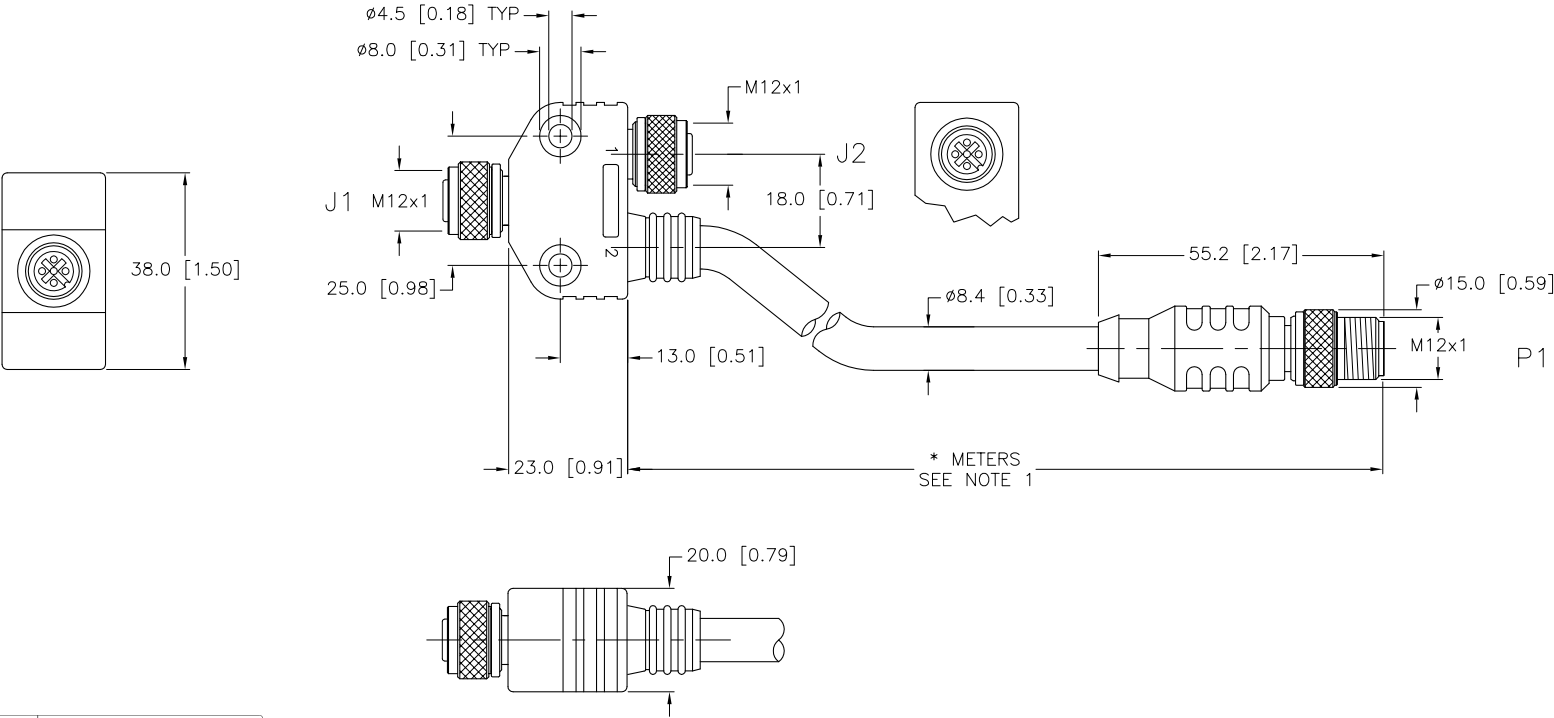


CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

8-29mm±1.0mm 30-49mm±2.0mm 50-69mm±3.0mm 70-100mm±4.0mm OVER 100mm±5.0mm					RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 04/05/11		DESCRIPTION VB2-FKM/FKM/RSC 5723-*M	
									DSGN		SCALE 1=1.5			
					FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		
DO NOT SCALE THIS DRAWING				FILE: 777027523								SHEET 1 OF 1		
A		DRAWING RELEASE			RDS		04/13/11							
REV		DESCRIPTION			BY		DATE		ECO NO.					