




SPECIFICATIONS	
CONTACT CARRIER MATERIAL	TPU OR NYLON
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER CABLE JACKET MATERIAL/COLOR	TPE/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x22 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

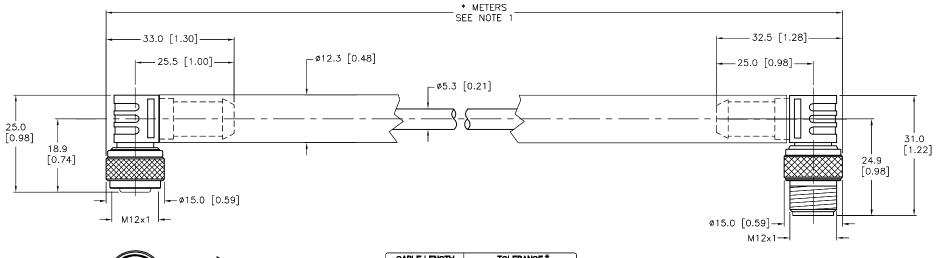



CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNILESS OTHERWISE SPECIFIED	



NOTES:

REV DESCRIPTION

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S1077" DESIGNATES CUSTOMER SUPPLIED SILICONE TUBING PLACED OVER CABLE JACKET. TUBING TO BE ASSEMBLED OVER CABLE JACKET PRIOR TO SOLDERING/CRIMPING AND MAXIMUM LENGTH OF 4.0 METERS.

3. "/S1587" DESIGNATES WELDLIFE CABLE. FINISH UPDATE MALE COUPLING NUT ER 04/23/18 56903

DATE

ECO NO.

RELATED DOCUMENTS 3RD ANGLE PROJECTION THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS

MATERIAL ALL DIMENSIONS SEE SPECIFICATIONS

SEE SPECIFICATIONS

2.

DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED. DATE 04/08/11 RDS SCALE 1=1.0 APVD UNIT OF MEASUREMENT

DO NOT SCALE THIS DRAWING

(763) 553-0708 fax www.turck.us

SOURCE DRAWING - FOR REFERENCE ONLY

3000 CAMPUS DRIVE

MINNEAPOLIS, MN 55441

-800-544-7769

SHEET 1 OF 1

(763) 553-7300

WK 4.4T-*-WS 4.4T/S1077/S1587

FILE: 777027554

MILLIMETER [INCH]

IDENTIFICATION NO. REV