


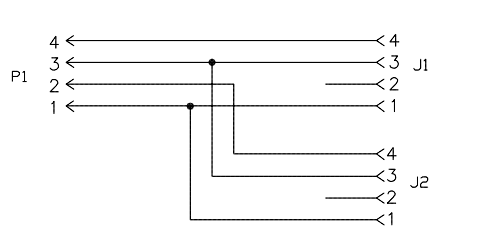


MALE END VIEW		FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NYLON OR TPU
				MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	1.5 A
				RATED VOLTAGE [V]	250 V
				OUTER JACKET MATERIAL/COLOR	PVC/GRAY
				CONDUCTOR INSULATION MATERIAL	PVC
				CONDUCTOR [AWG]	4x18 AWG
				TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

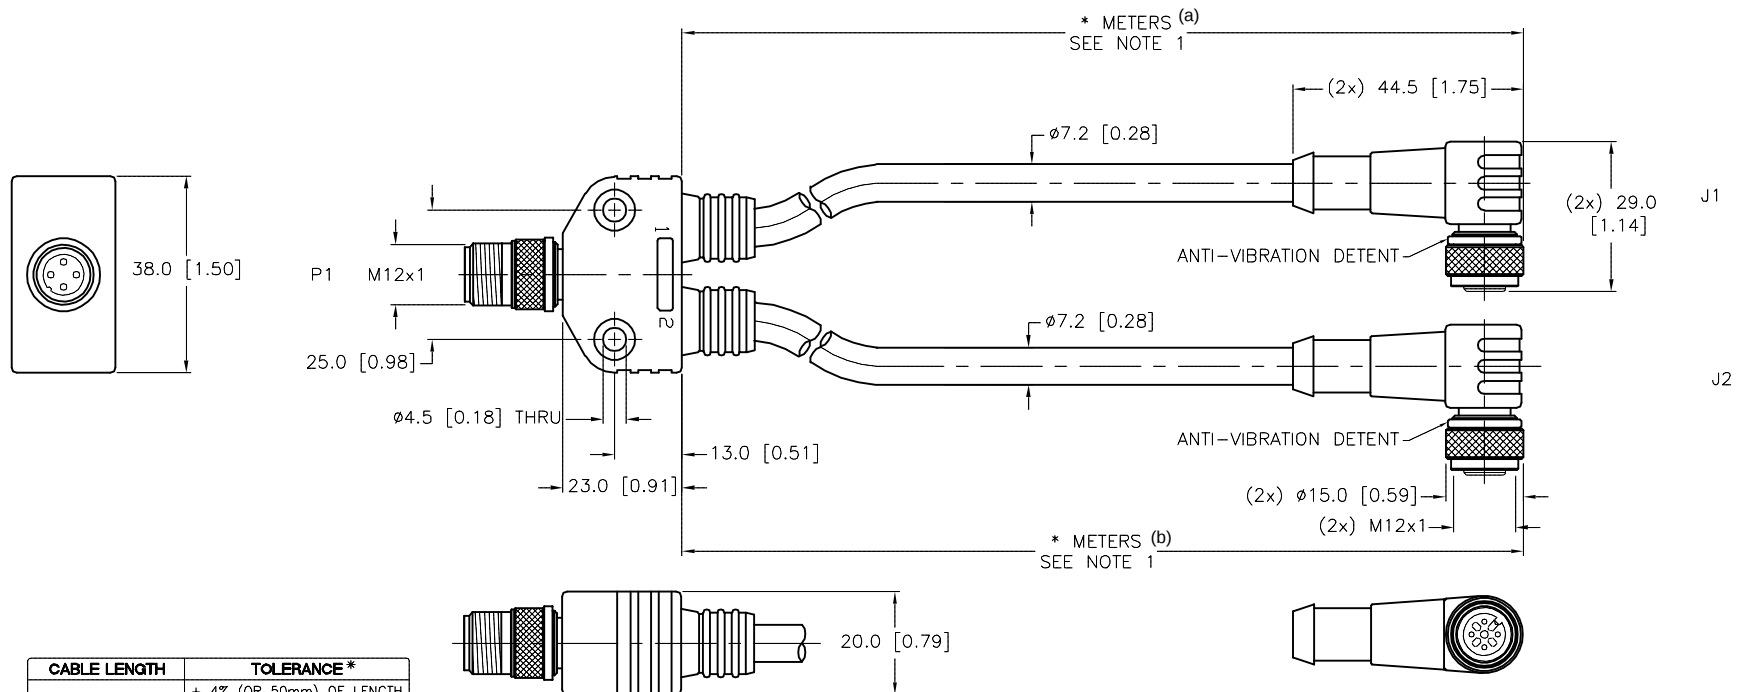


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S622" DESIGNATES 18 AWG, GREY CABLE.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT CK		DATE 08/11/11	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.5	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION VB2-FSM 4.4/2WKC 4T-*/*/S622 (a)(b)	
							DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
									REV B	
B ADD DESIGNATED LETTERS TO LENGTH PER ECO					TV 08/25/17		61979			
REV DESCRIPTION					BY DATE ECO NO.				FILE: 777027978	
									SHEET 1 OF 1	