



FEMALE END VIEW

GROUND CONNECTED
TO HOUSING

V = WHITE + = N/C
U = BLACK - = N/C
W = RED 1 = N/C
⊕ = GRN/YEL 2 = N/C

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON
MOLDED MATERIAL/COLOR	POLYAMIDE/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ZINC/NICKEL
RATED CURRENT [A]	35.0 A (8 AWG)
RATED VOLTAGE [V]	600 V (8 AWG)
CABLE JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBERS OF CONDUCTORS [AWG]	4x8 AWG
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS IEC IP67
APPROVALS AND CERTIFICATIONS	UL 2237

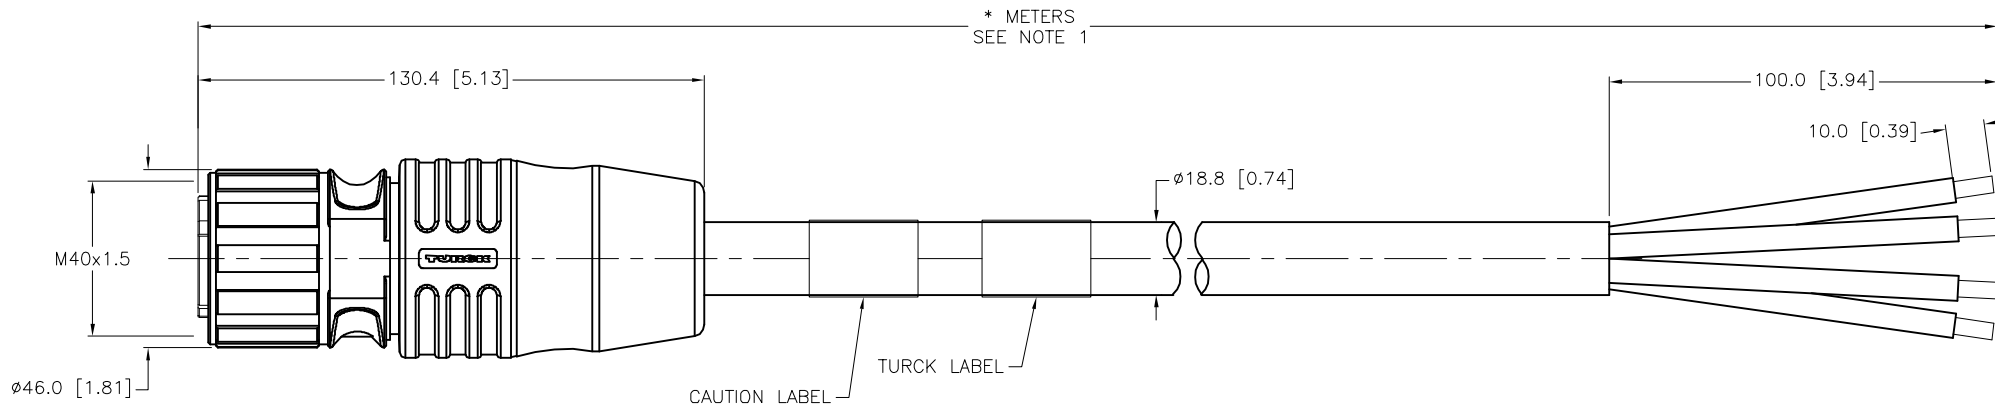

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:


1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.



CAUTION:

RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us						
	MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT		RDS	DATE	03/19/12				DESCRIPTION HKM 4800-1279-*	IDENTIFICATION NO.		REV G
	SEE SPECIFICATIONS		APVD			SCALE	1=2.0							
FINISH	CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT											
SEE SPECIFICATIONS		MILLIMETER [INCH]												
		DO NOT SCALE THIS DRAWING			FILE: 777028053					SHEET 1 OF 1				

G	UPDATE CONDUCTOR COLOR	NF	01/25/18	61098
REV	DESCRIPTION	BY	DATE	ECO NO.