







MALE END VIEW		FEMALE END VIEW	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	NYLON or PBT
 M23 connector		 M23 connector	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
<div>1 = VIOLET 2 = RED 3 = GRAY 4 = RED/BLUE 5 = GREEN 6 = BLUE 7 = GRAY/PINK 8 = WHITE/GREEN 9 = WHITE/YELLOW 10 = WHITE/GRAY 11 = BLACK 12 = GREEN/YELLOW 13 = YELLOW/BROWN 14 = BROWN/GREEN 15 = WHITE 16 = YELLOW 17 = PINK 18 = GRAY/BROWN 19 = BROWN</div>			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	9.0 A (PINS 6,19), 2.0 A (ALL OTHER PINS)
			RATED VOLTAGE [V]	150 V
			OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	3x18 AWG, 16x22 AWG
			DRAIN/SHIELD	20 AWG DRAIN/POLYESTER FOIL SHIELD
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	IEC IP67



NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

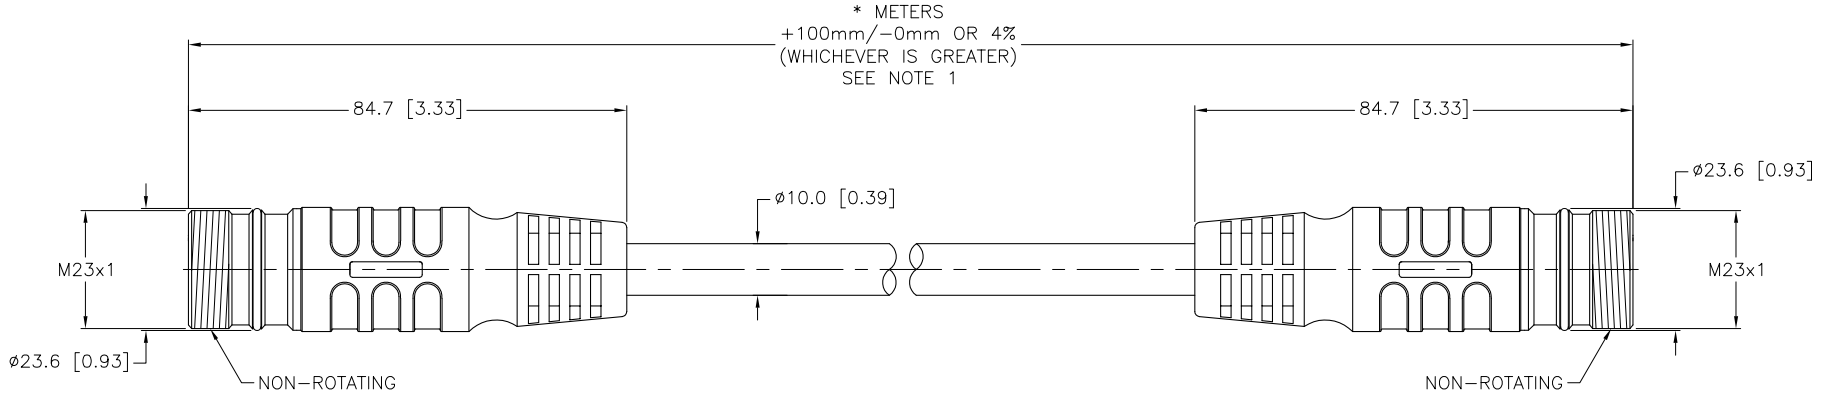SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.						DRFT KMY		DATE 11/08/11	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD T.S.		SCALE 1=1.5	
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING		MILLIMETER [ INCH ]		CSSM CXM 19-19-*	
SEE SPECIFICATIONS								IDENTIFICATION NO.	
								REV	
								A	
A DRAWING RELEASE				KMY 11/23/11				FILE: 777028306	
REV DESCRIPTION				BY DATE ECO NO.				SHEET 1 OF 1	