




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 1 = BROWN 2 = BLUE 3 = N/C 4 = GREEN/YELLOW 5 = N/C	 1 = BROWN 2 = BLUE 3 = N/C 4 = GREEN/YELLOW 5 = N/C	CONTACT CARRIER MATERIAL	NYLON OR TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/COLOR	NYLON/BLACK
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	3x20 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K

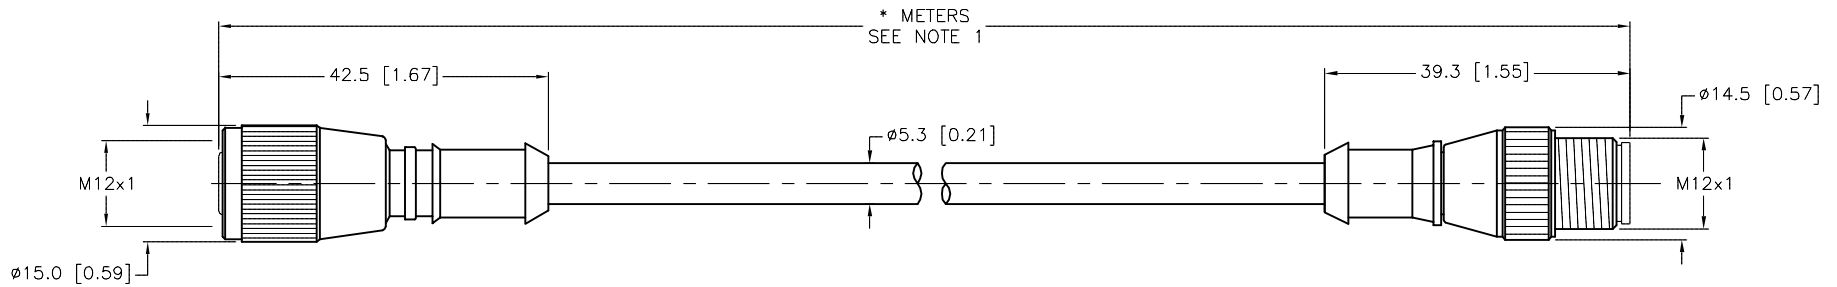


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

*UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S626" DESIGNATES REVERSE KEYED EUROFAST WIRED TO MATE TO MICROSWITCH PROX. CROSSES TO BRAD HARRISON #81286 SERIES.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							
MATERIAL		DRFT RDS		DATE 11/21/11		DESCRIPTION WAKKW 4T-*--WASKW 4T/S626	
SEE SPECIFICATIONS		APVD A.A.		SCALE 1=1.0			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV B	
SEE SPECIFICATIONS							
		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: 777028342	
						SHEET 1 OF 1	

B	UPDATE CABLE DIAMETER	KMY	04/26/13	38979
REV	DESCRIPTION	BY	DATE	ECO NO.