





FEMALE END VIEW (J1)	MALE END VIEW (P1)	MALE END VIEW (P2)	SPECIFICATIONS	
 	 	 	CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED MATERIAL/COLOR	TPU/YELLOW (VB2,P1), BLUE-GRAY (P2)
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	1.0 A
			RATED VOLTAGE [V]	30 V
			OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW (P1), TPE/TEAL (P2)
			CONDUCTOR INSULATION MATERIAL	PVC (P1), HDPE (P2)
			NUMBER OF CONDUCTORS [AWG]	4x22 AWG (P1), 2UTP×24 AWG, STRANDED (P2)
			TEMPERATURE RANGE	−40°C to +80°C (−40°F to +176°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

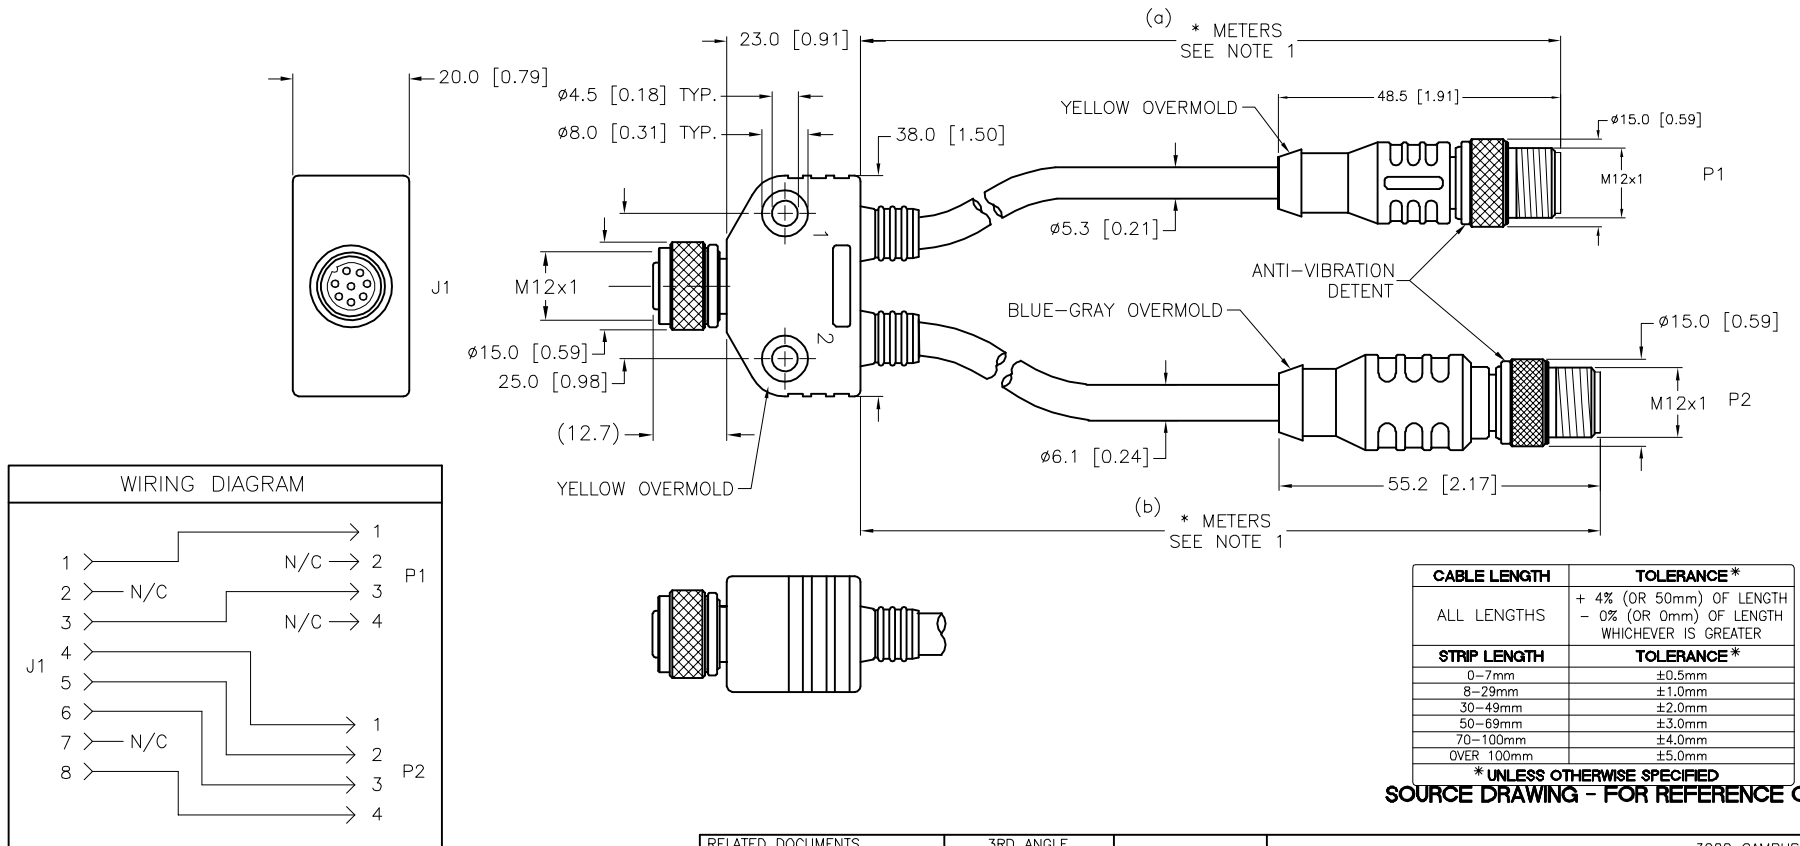


NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. INTENDED APPLICATION IS TO BREAK OUT ETHERNET AND POWER CONNECTIONS FOR INDUSTRIAL CAMERAS. PERFORMANCE VALIDATION IS RESPONSIBILITY OF THE USER, AND NOT GUARANTEED BY TURCK.

H	ADD NOTE 2	RDS	11/16/17	63048
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	11/29/11		DESCRIPTION			
		APVD	E.S.	SCALE	1=1.3		VB2-FKM 84/RSC 4.4T-*/RSCD 440-*M (a) (b)			
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT				IDENTIFICATION NO.				REV
		MILLIMETER [INCH]								H
		DO NOT SCALE THIS DRAWING				FILE: 777028350			SHEET 1 OF 1	