




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
 <i>M23 connector</i>		 <i>mini FAST</i>		CONTACT CARRIER MATERIAL	NYLON or PBT (J1), TPU (P1)
1 = VIOLET 2 = RED 3 = GREY 4 = RED/BLUE 5 = BLUE 6 = GREEN 7 = BROWN 8 = WHITE/GREEN 9 = WHITE/YELLOW 10 = WHITE/GREY 11 = BLACK 12 = GREEN/YELLOW 13 = YELLOW/BROWN 14 = BROWN/GREEN 15 = WHITE 16 = YELLOW 17 = PINK 18 = GREY/BROWN 19 = GREY/PINK		1 = VIOLET 2 = RED 3 = GREY 4 = RED/BLUE 5 = BLUE 6 = GREEN 7 = BROWN 8 = WHITE/GREEN 9 = WHITE/YELLOW 10 = WHITE/GREY 11 = BLACK 12 = GREEN/YELLOW 13 = YELLOW/BROWN 14 = BROWN/GREEN 15 = WHITE 16 = YELLOW 17 = PINK 18 = GREY/BROWN 19 = GREY/PINK		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING (J1)	BRASS/NICKEL
				HOUSING MATERIAL/PLATING (P1)	BRASS/NICKEL
				RATED CURRENT [A]	2.0 A
				RATED VOLTAGE [V]	150 V
				OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS	3x18 AWG/16x22 AWG
				DRAIN/SHIELD	20 AWG/ALUM.-POLYESTER FOIL
				TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS IEC IP67

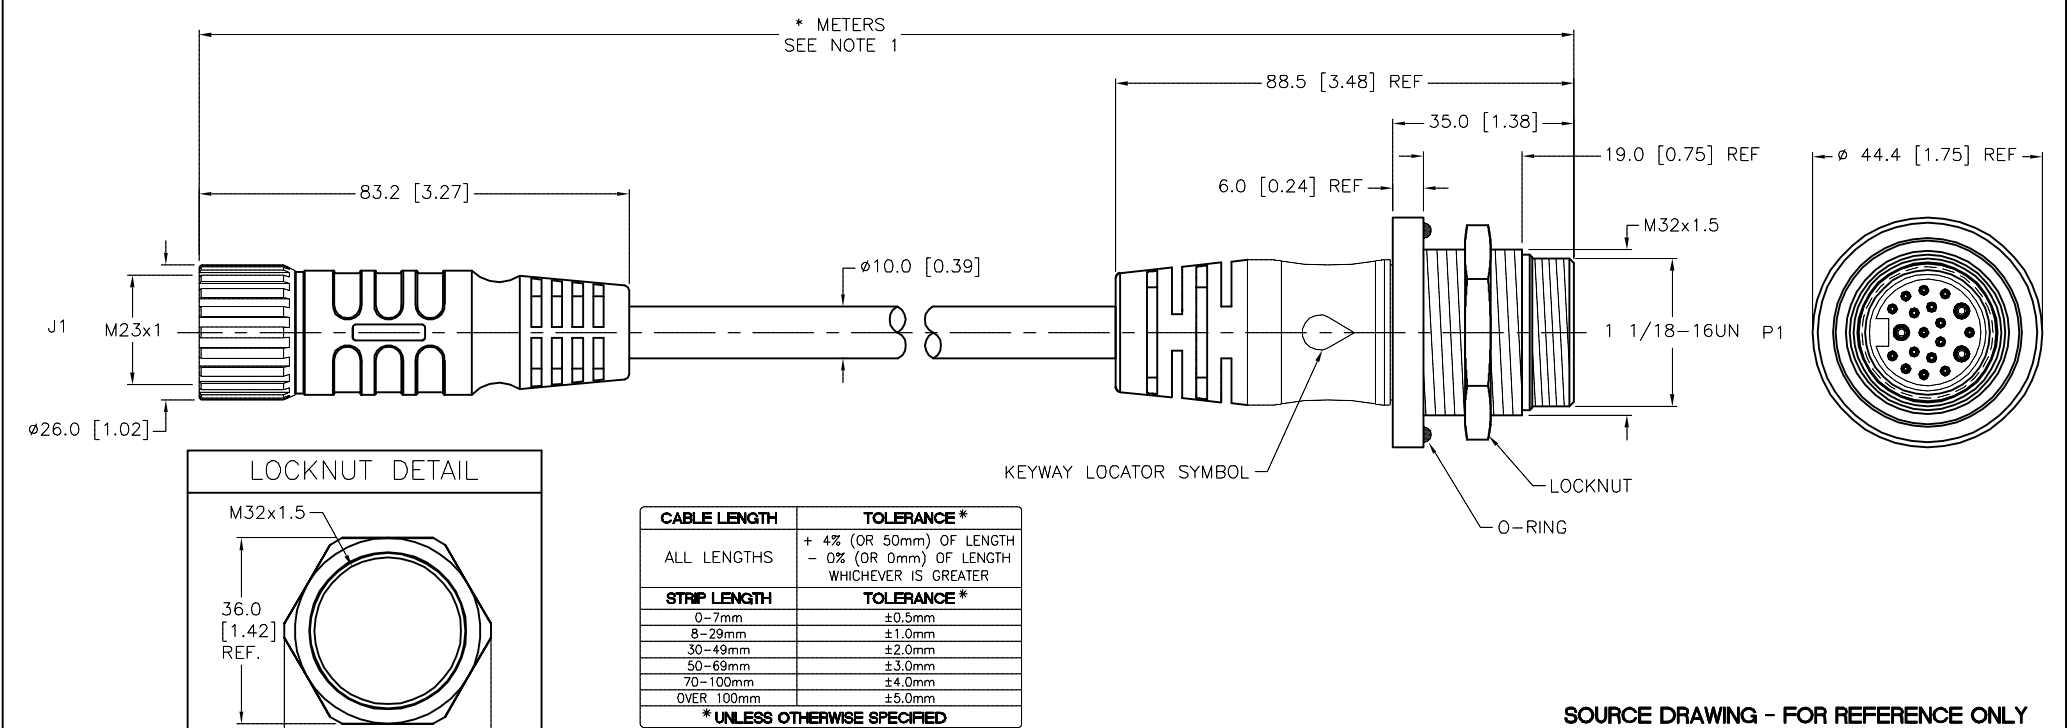

NOTES: 1. "M" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.				SOURCE DRAWING - FOR REFERENCE ONLY			
RELATED DOCUMENTS				3RD ANGLE PROJECTION			
1. 2. 3. 4.				THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			
MATERIAL				DRFT RDS DATE 11/29/11			
SEE SPECIFICATIONS				APVD N.M. SCALE 1=1.5			
FINISH				UNIT OF MEASUREMENT			
SEE SPECIFICATIONS				MILLIMETER [INCH]			
				DO NOT SCALE THIS DRAWING			
				CONTACT TURCK FOR MORE INFORMATION			
				DESCRIPTION			
				CKM 19 RSMP 190-*M			
				IDENTIFICATION NO.			
				REV			
				B			
				FILE: 777028370			
				SHEET 1 OF 1			