





MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (J1,J2)
			RATED CURRENT [A]	2.0 A
			RATED VOLTAGE [V]	125 V
			OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW (P1), PVC/GREY (J1,J2)
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	3x24 AWG (P1), 3x22 (J1,J2)
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

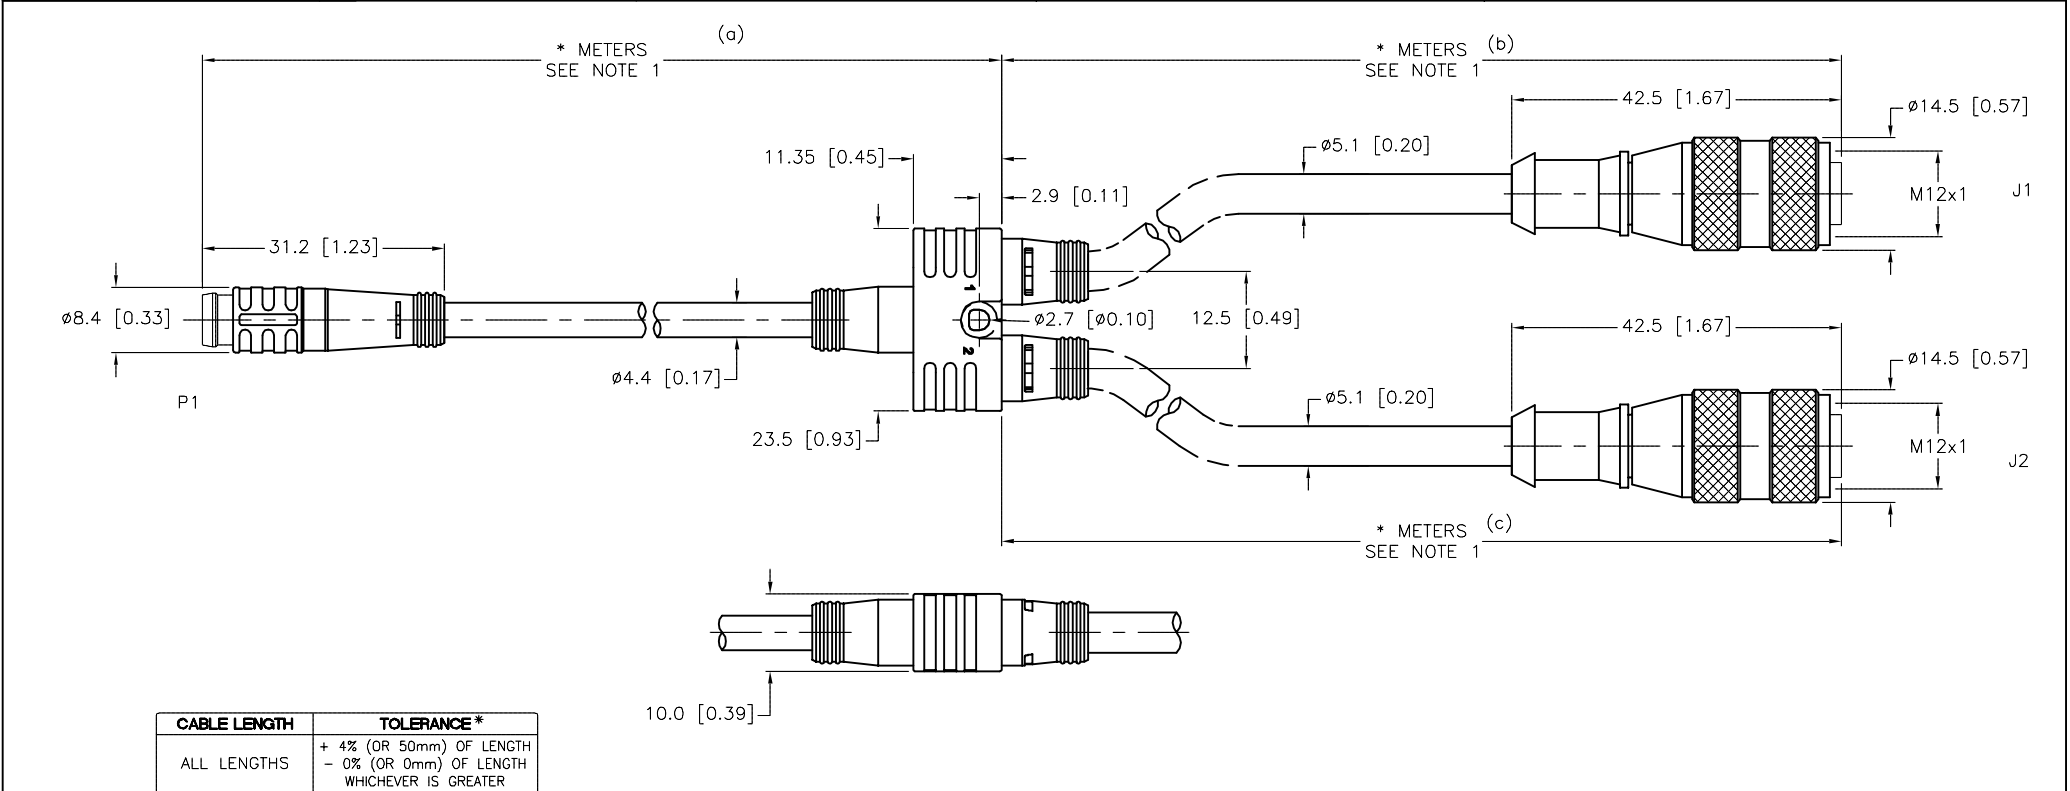

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.


2. "/S651" DESIGNATES PARALLEL WIRING.

B	UPDATE J1,J2 CABLE SPECIFICATIONS	KMY	05/21/14	44672
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RDS
APVD T.B.

DATE 12/21/11
SCALE 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

TURCK

DESCRIPTION
YP2-PSG 3-*/2RK 4T-*/*/S651
(a) (b)(c)

IDENTIFICATION NO.
FILE: 777028462

REV
B

SHEET 1 OF 1