



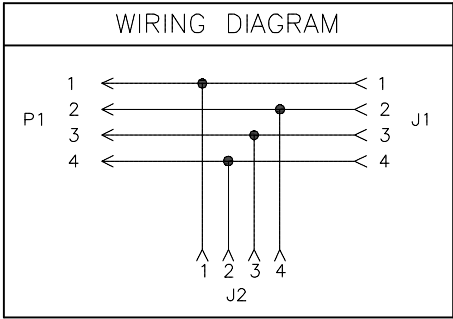


MALE END VIEW	FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	PVC
			MOLDED MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	35 A COMBINED, 18 A DROP
			RATED VOLTAGE [V]	600 V
			CABLE JACKET MATERIAL/COLOR	PVC/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
			NUMBERS OF CONDUCTORS [AWG]	4x14 AWG
			TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

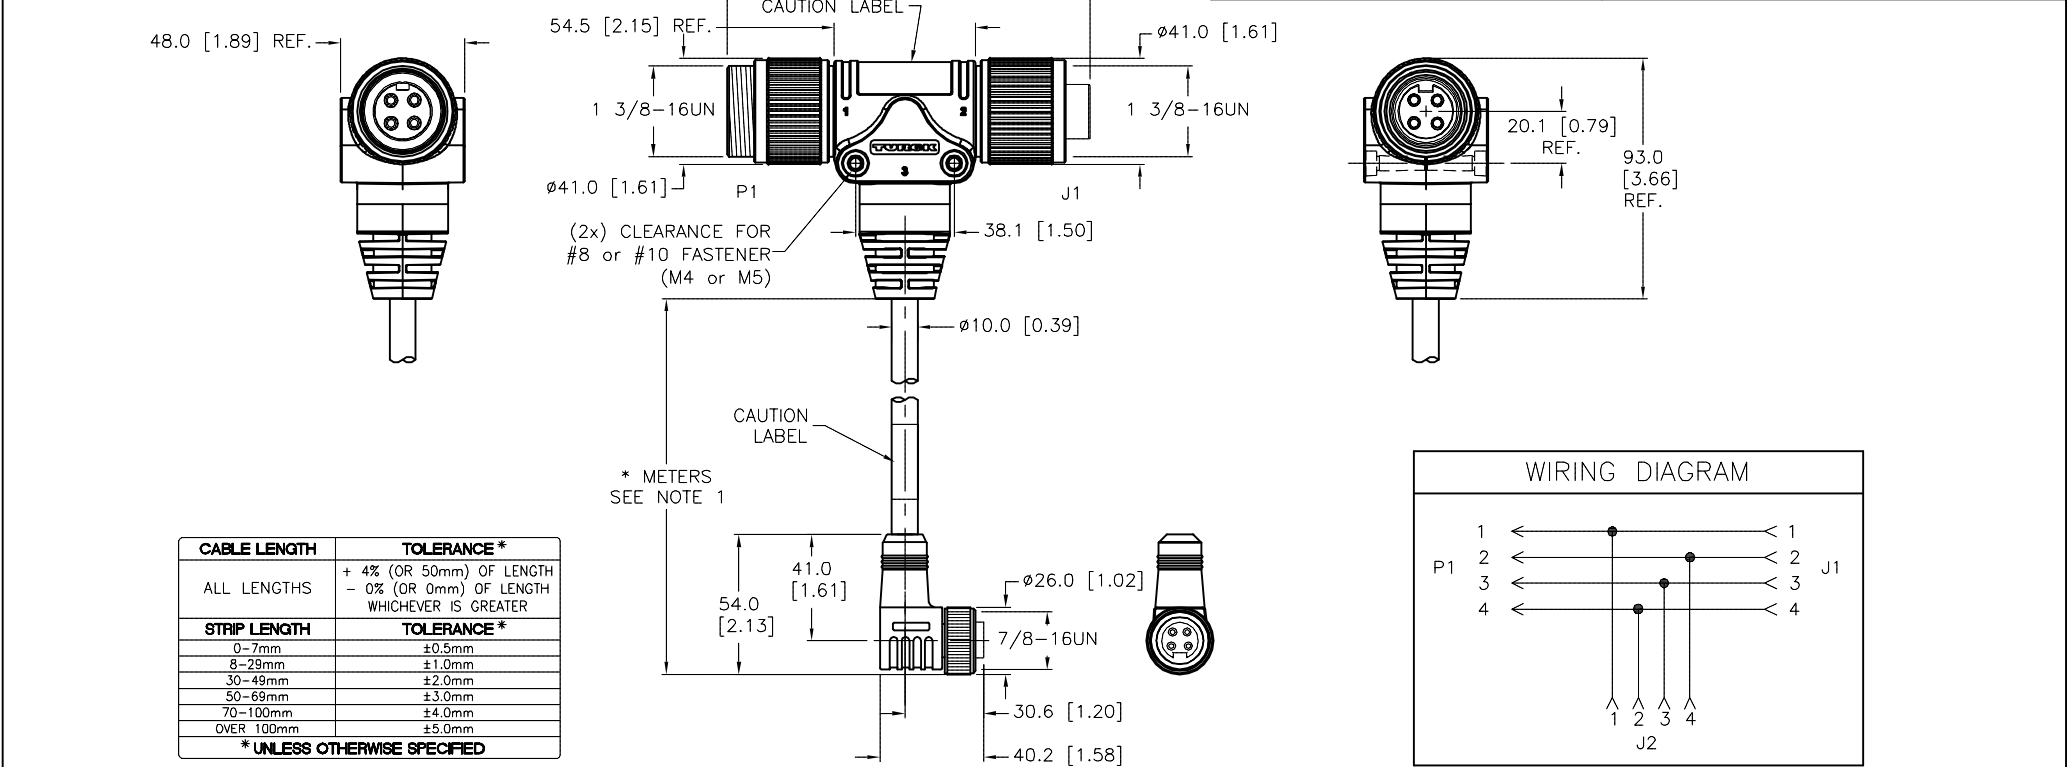

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S4000" DESIGNATES TC-ER CABLE.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT KMY		DATE 01/23/12	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD T.S.		SCALE 1=3.0	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS					DO NOT SCALE THIS DRAWING		MILLIMETER [INCH]		GSDM/GKDM/WKM 44-*/S4000	
SEE SPECIFICATIONS									IDENTIFICATION NO.	
									REV	
									E	
E UPDATE RATED CURRENT									FILE: 777028540	
REV DESCRIPTION									SHEET 1 OF 1	
NF 04/26/19 69357										
BY DATE ECO NO.										