



SPECIFICATIONS				
CONTACT CARRIER MATERIAL	TPU			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED			
RATED CURRENT [A]	8.0 A			
RATED VOLTAGE [V]	600 V PVC			
CONDUCTOR INSULATION MATERIAL				
NUMBERS OF CONDUCTORS [AWG]	6×16 AWG			
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K			



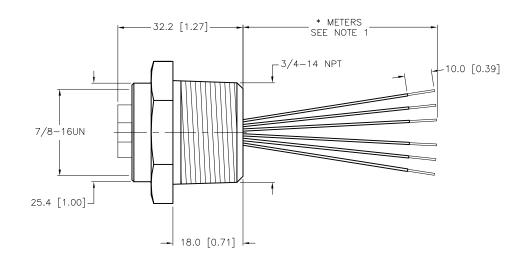

3RD ANGLE PROJECTION

CABLE LENGTH	TOLERANCE* + 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER					
ALL LENGTHS						
STRIP LENGTH	TOLERANCE *					
0-7mm	±0.5mm					
8-29mm	±1.0mm					
30-49mm	±2.0mm					
50-69mm	±3.0mm					
70-100mm	±4.0mm					
OVER 100mm	±5.0mm					
* UNLESS OTHERWISE SPECIFIED						

## SOURCE DRAWING - FOR REFERENCE ONLY

3000 CAMPUS DRIVE

SHEET 1 OF 1

## PECIFIC SI

RELATED DOCUMENTS

2.

3.

ATERIAL		
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	
NISH	CONTACT TURCK	

# THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. DRFT KMY DATE 02/22/ APVD T.S. SCALE 1=1.

### MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

T KMY DATE 02/22/12 DESCRIPTION P-RKFV 63-\*/14.75/NPT

UNIT OF MEASUREMENT

IDENTIFICATION NO.

REV

FILE: 777028682

## NOTES:

1. "\*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

L			CONTACT TURCK				
	D UPDATE PROTECTION CLASS	СВМ	04/13/21	76628	SEE SPECIFICATIONS	FOR MORE INFORMATION	
	REV DESCRIPTION	BY	DATE	ECO NO.			DO NOT SCALE THIS DRAWING
_	•	•	-				