


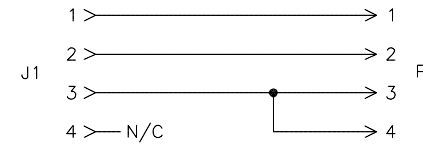


FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = BROWN 2 = BLACK 3 = BLUE 4 = N/C 	 1 = BROWN 2 = BLACK 3 = BLUE 4 = JUMPER TO PIN 3 		CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
			OUTER JACKET MATERIAL/COLOR	PVC/GREY
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBERS OF CONDUCTORS [AWG]	3x22 AWG
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

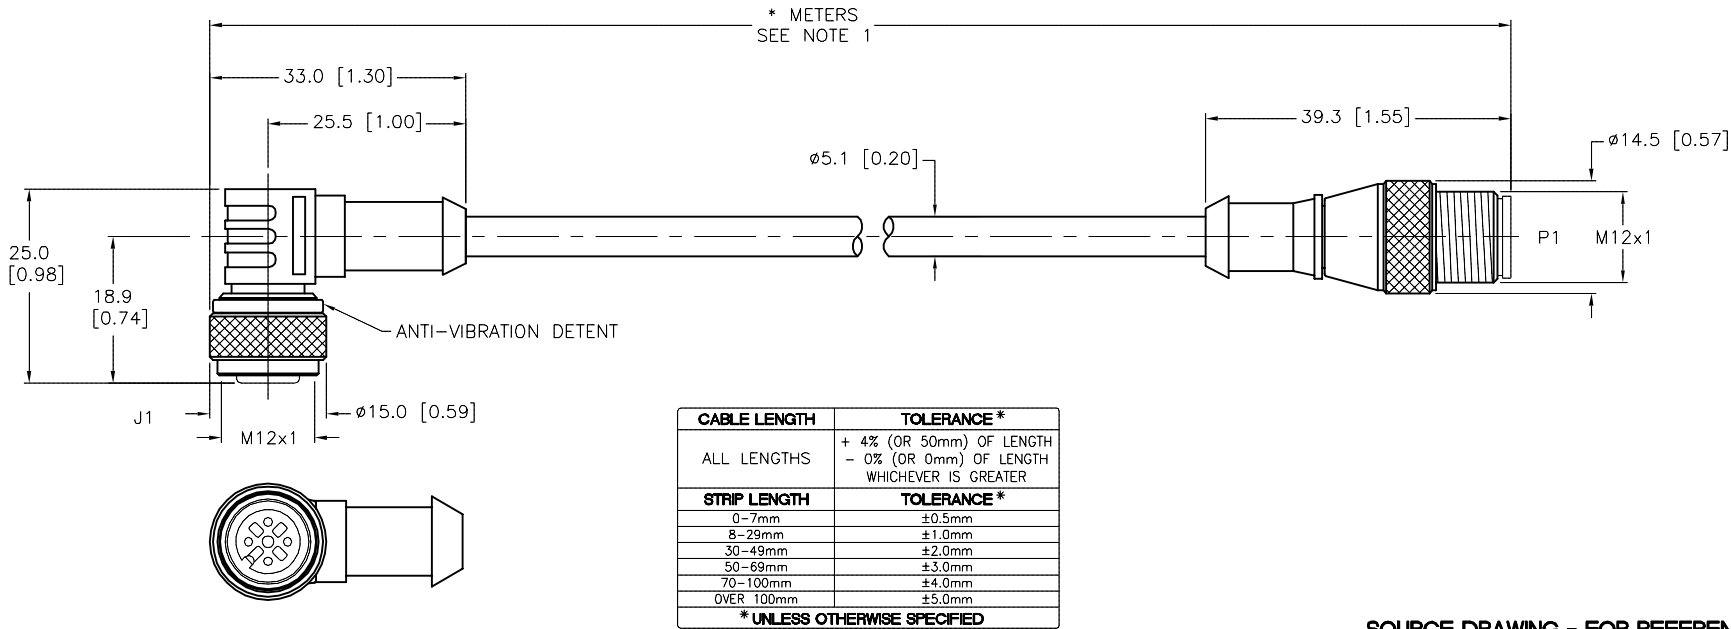


SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "S1119" DESIGNATES WIRING TO INTERFACE BETWEEN BL67-2AI-I, BL67-4AI-I/V AND Bi(Ni)...-LIU-H1141.

B	UPDATE CABLE SPECIFICATIONS	KMY	05/14/14	44672
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
							
MATERIAL SEE SPECIFICATION	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	03/05/12		
FINISH SEE SPECIFICATIONS		APVD	T.S.	SCALE	1 = 1.0		
		UNIT OF MEASUREMENT			DESCRIPTION WK 4.4T-*--RS 4.4T/S1119		
		MILLIMETER [INCH]					
		DO NOT SCALE THIS DRAWING			IDENTIFICATION NO.		REV B
					FILE: 777028739		SHEET 1 OF 1