

MALE END VIEW (P1)

1 = N/C
2 = GREEN/YELLOW
3 = BLACK

FEMALE END VIEW (J1-J2)

1 = N/C
2 = GREEN/YELLOW
3 = BLACK

WIRING DIAGRAM


1 ← N/C
2 ←
3 ←

N/C ← 1
2 J1
3

N/C ← 1
2 J2
3

SPECIFICATIONS

CONTACT CARRIER MATERIAL	PVC
MOLDED BODY MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	15.0 A
RATED VOLTAGE [V]	600 VAC/VDC
OUTER JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	PVC/NYLON
NUMBER OF CONDUCTORS [AWG]	3x14 AWG
TEMPERATURE RANGE	-40°C TO +90°C (-40°F TO +194°F)
PROTECTION CLASS	MEETS IEC IP67

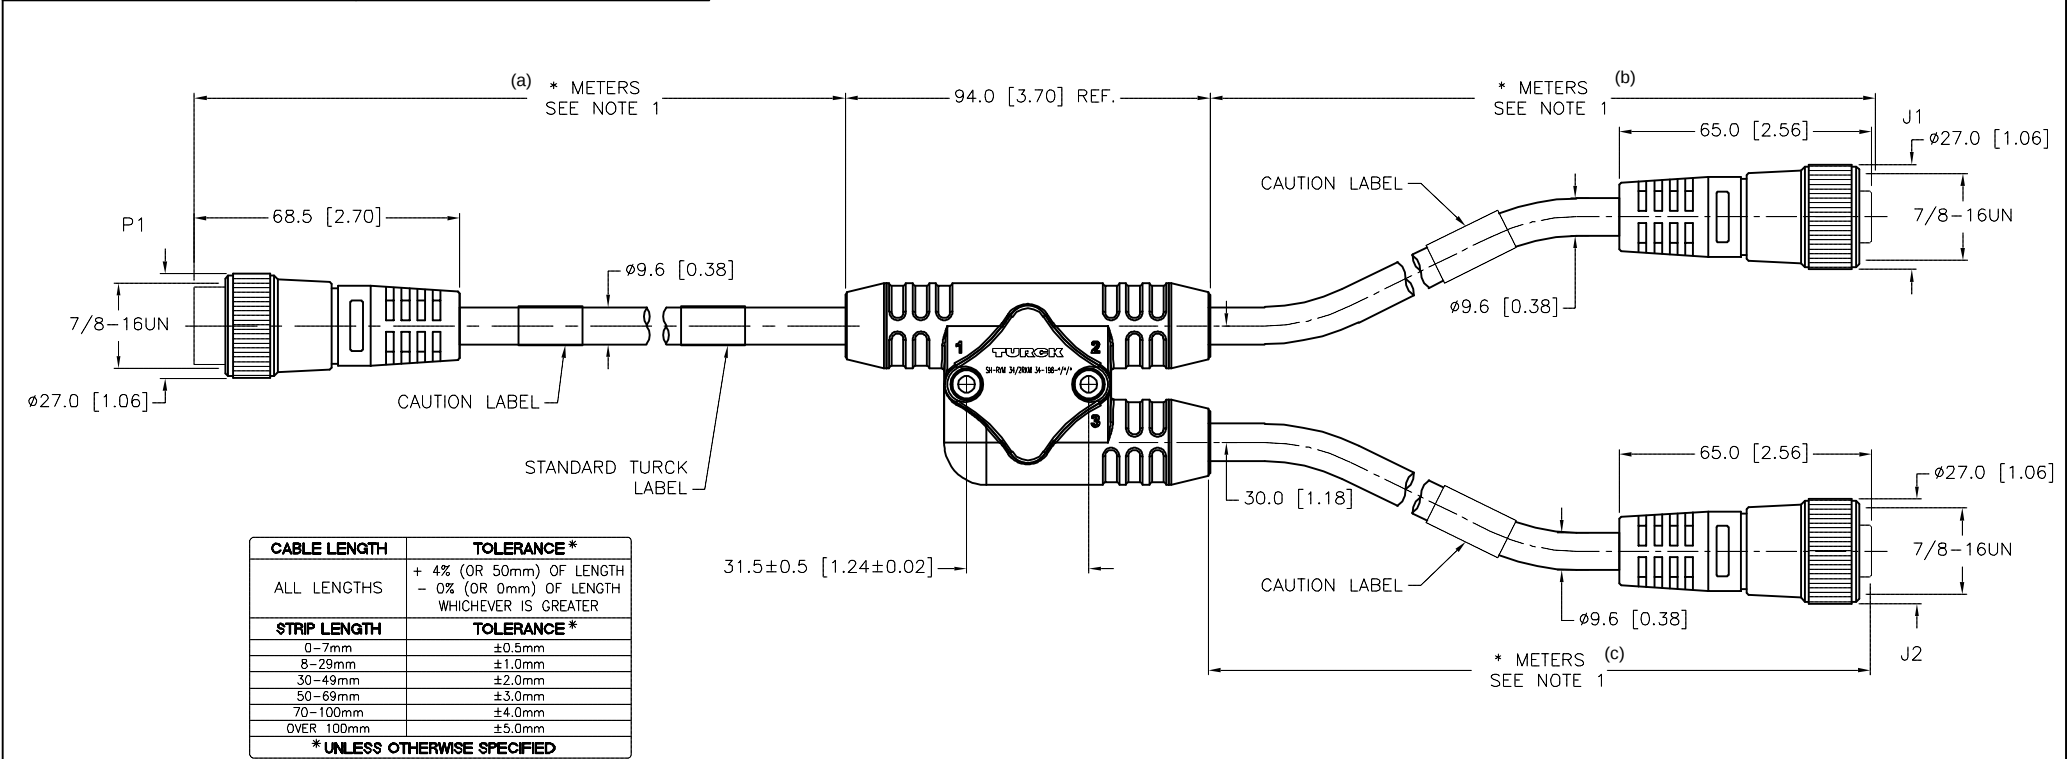

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
1.		DRFT KMY	DATE 02/09/12	DESCRIPTION SH-RYM 34/2RKM 34-198-*/*/* (a) (b) (c)	REV E
2.			SCALE 1=2.0		
3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT MILLIMETERS	IDENTIFICATION NO.	FILE: 777028913	SHEET 1 OF 1
4.					
MATERIAL	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION			
FINISH	SEE SPECIFICATIONS				