





MALE END VIEW	FEMALE END VIEW	SPECIFICATIONS																							
 1 = GREEN 2 = WHITE 3 = BLUE 4 = GRAY 5 = YELLOW 6 = BROWN	 1 = GREEN 2 = WHITE 3 = BLUE 4 = GRAY 5 = YELLOW 6 = BROWN	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPV</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPV/WHITE</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/COLOR</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>RATED CURRENT [A]</td><td>9.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>300 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPV/WHITE</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>POLYESTER ELASTOMER</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>6x18 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	TPV	MOLDED HEAD MATERIAL/COLOR	TPV/WHITE	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/COLOR	STAINLESS STEEL/PASSIVATED	RATED CURRENT [A]	9.0 A	RATED VOLTAGE [V]	300 V	OUTER JACKET MATERIAL/COLOR	TPV/WHITE	CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER	NUMBER OF CONDUCTORS [AWG]	6x18 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	
CONTACT CARRIER MATERIAL	TPV																								
MOLDED HEAD MATERIAL/COLOR	TPV/WHITE																								
CONTACT MATERIAL/PLATING	BRASS/GOLD																								
COUPLING NUT MATERIAL/COLOR	STAINLESS STEEL/PASSIVATED																								
RATED CURRENT [A]	9.0 A																								
RATED VOLTAGE [V]	300 V																								
OUTER JACKET MATERIAL/COLOR	TPV/WHITE																								
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER																								
NUMBER OF CONDUCTORS [AWG]	6x18 AWG																								
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																								
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																								
																									

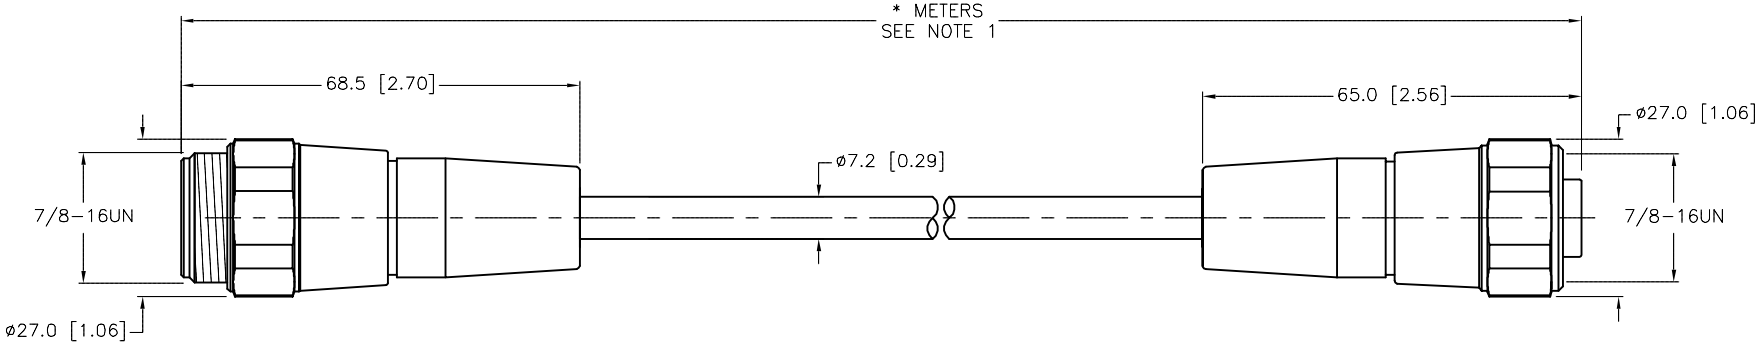

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "∗" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					70–100mm±4.0mm OVER 100mm±5.0mm * UNLESS OTHERWISE SPECIFIED		RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1–800–544–7769 (763) 553–7300 (763) 553–0708 fax turck.com	
					MATERIAL SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT RDS APVD T.S.		DATE 04/19/12 SCALE 1 = 1.3		DESCRIPTION WD–RSV RKV 60–∗M	
FINISH SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING				IDENTIFICATION NO. REV E								
E	UPDATE MATERIAL SPECIFICATIONS			NF	07/21/15	50671								
REV	DESCRIPTION			BY	DATE	ECO NO.								