


i					
SPECIFICATIONS					
CONTACT CARRIER MATERIAL	TPU OR NYLON				
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL				
RATED CURRENT [A]	2.0 A				
RATED VOLTAGE [V]	125 VAC/DC				
OUTER CABLE JACKET MATERIAL/COLOR	TPU/BLACK				
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER				
NUMBER OF CONDUCTORS [AWG]	4x26 AWG				
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67				

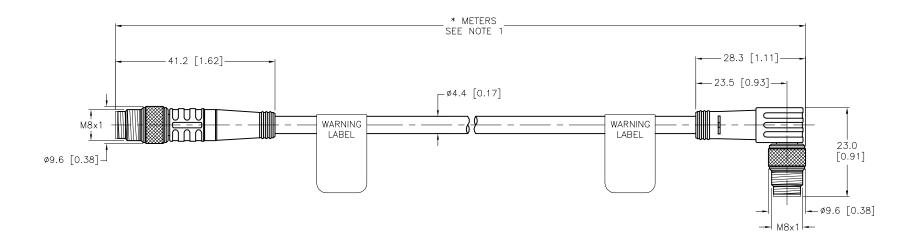

CABLE LENGTH	TOLERANCE*						
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER						
STRIP LENGTH	TOLERANCE*						
0-7mm	±0.5mm						
8-29mm	±1.0mm						
30-49mm	±2.0mm ±3.0mm						
50-69mm							
70-100mm	±4.0mm						
OVER 100mm	±5.0mm						
* UNLESS OTHERWISE SPECIFIED							

△ WARNING:

ELECTRICAL SHOCK HAZARD CONNECTOR IS TO BE IN THE THE MATED STATE WHILE ENERGIZED

REMOVE POWER BEFORE SERVICING.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 3RD ANGLE PROJECTION THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 2. (763) 553-7300 DOCUMENT WITHOUT WRITTEN PERMISSION IS 3. (763) 553-0708 fax www.turck.us DATE 04/20/12 DESCRIPTION MATERIAL RDS PSG 4M-*-PSW 4M/S90/S101 SCALE 1=1.0 ALL DIMENSIONS N.M. DISPLAYED ON THIS DRAWING ARE FOR SEE SPECIFICATIONS UNIT OF MEASUREMENT

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER
- 2. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET.
- 7 "/C404" DECIDIATED FLEXILEE OO AND O TRACK OADLE

3. "/S101" DESIGNATES FLEXLIFE—20 AND C—TRACK CABLE.					FINISH	CONTACT TURCK	MILLIMETER [INCH]	IDENTIFICATION NO.	RE	EV
F	ADD WARNING LABELS	NF	02/05/18	63893	SEE SPECIFICATIONS	FOR MORE INFORMATION			1	1
REV	DESCRIPTION	BY	DATE	ECO NO.			DO NOT SCALE THIS DRAWING	FILE: 777029027	SHEET 1 C	ЭF