




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
 1 = WHITE 2 = BLACK 3 = GREEN 4 = RED 5 = ORANGE 6 = BLUE 7 = BROWN 8 = YELLOW 9 = VIOLET 10 = GRAY 11 = PINK 12 = TAN 13 = WHITE/BLACK 14 = WHITE/GREEN 15 = WHITE/RED 16 = WHITE/BLUE		 1 = WHITE 2 = BLACK 3 = GREEN 4 = RED 5 = ORANGE 6 = BLUE 7 = BROWN 8 = YELLOW 9 = VIOLET 10 = GRAY 11 = PINK 12 = TAN 13 = WHITE/BLACK 14 = WHITE/GREEN 15 = WHITE/RED 16 = WHITE/BLUE		CONTACT CARRIER MATERIAL	NYLON or PBT
 M23 connector		 M23 connector		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	3.0 A
				RATED VOLTAGE [V]	300 V
				OUTER JACKET MATERIAL/COLOR	PVC/BLUE
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	16x22 AWG
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	IEC IP67

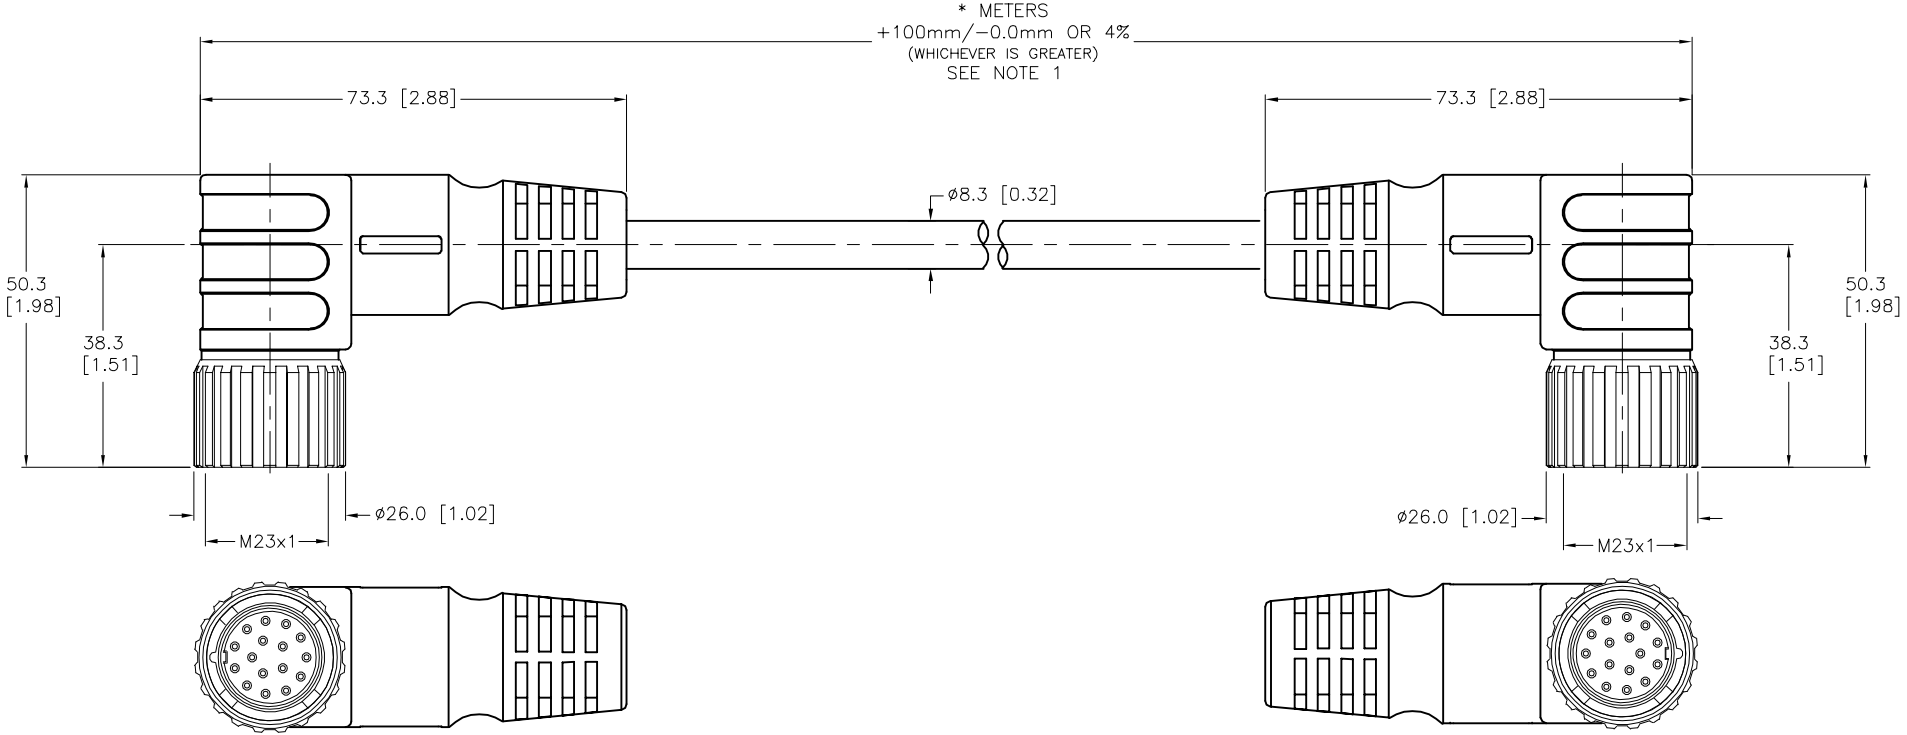


SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

C	UPDATE CONDUCTOR COLOR	NF	09/07/17	61751
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
							
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	05/03/12	DESCRIPTION CKNWM CSNWM 16-16-*	
		APVD	T.S.	SCALE	1=1.3		
FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT				IDENTIFICATION NO.	REV C
		MILLIMETER [INCH]					
		DO NOT SCALE THIS DRAWING				FILE: 777029081	SHEET 1 OF 1