



	SPECIFICATIONS		
	CONTACT CARRIER MATERIAL (P1)	NYLON OR TPU	
	MOLDED HEAD MATERIAL/COLOR (P1)	TPU/BLACK	
	CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD	
	COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL	
	CONTACT CARRIER MATERIAL/COLOR (P2)	POLYCARBONATE/CLEAR	
	MOLDED HEAD MATERIAL/COLOR (P2)	TPU/BLACK	
	CONTACT MATERIAL/PLATING (P2)	BRONZE/GOLD	
	RATED CURRENT [A]	1.5 A	
	RATED VOLTAGE [V]	42 V	
ſ	OUTER JACKET MATERIAL/COLOR	TPU/TEAL (HALOGEN-FREE)	
	CONDUCTOR INSULATION MATERIAL	PE	
	NUMBER OF CONDUCTORS [AWG]	4x26 AWG, STRANDED, CAT 5E	
	SHIELDING	ALUMPOLYESTER FOIL/T-C BRAIDED	
	TEMPERATURE RANGE	-40° C to $+75^{\circ}$ C (-40° F to $+167^{\circ}$ F)	
	PROTECTION CLASS	MEETS IEC IP67 (IP20:P2)	

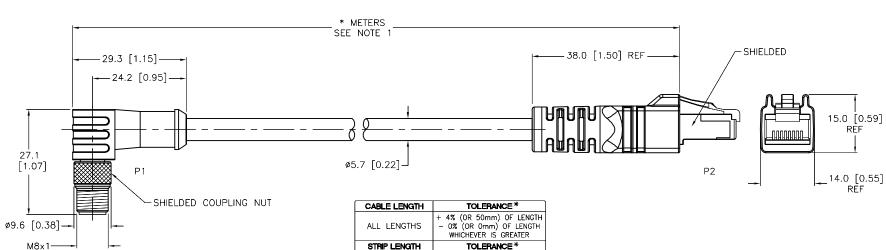



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- 1."*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. MULTIPROTOCOL AND ETHERCAT COMPATIBLE.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RCK	3000 CAMPUS MINNEAPOLIS, MN 1-800-544- (763) 553-7 (763) 553-0 www.turck.u	1 55441 7769 300 708 fax
MATERIAL	ALL DIVISIONS	10/0	DATE 05/31/12	DESCRIPTION PSWS 4M RJ45S 4413-		1
ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD C.K.	SCALE 1=1.0				
	UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
FINISH	CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [INCH]				G
)
		DO NOT SCALE	THIS DRAWING	FILE: 777029216	SHEET	1 OF 1

G	UPDATED CURRENT RATING PER ECO	TV	12/05/16	57534
REV	DESCRIPTION	BY	DATE	ECO NO.