




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 1 = BROWN 2 = N/C 3 = BLUE 4 = BLACK	 1 = BROWN 2 = N/C 3 = BLUE 4 = BLACK	CONTACT CARRIER MATERIAL	TPV
		MOLDED HEAD MATERIAL/COLOR	TPV/WHITE
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		CABLE JACKET MATERIAL/COLOR	TPV/WHITE
		CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
		NUMBER OF CONDUCTORS [AWG]	3x20 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

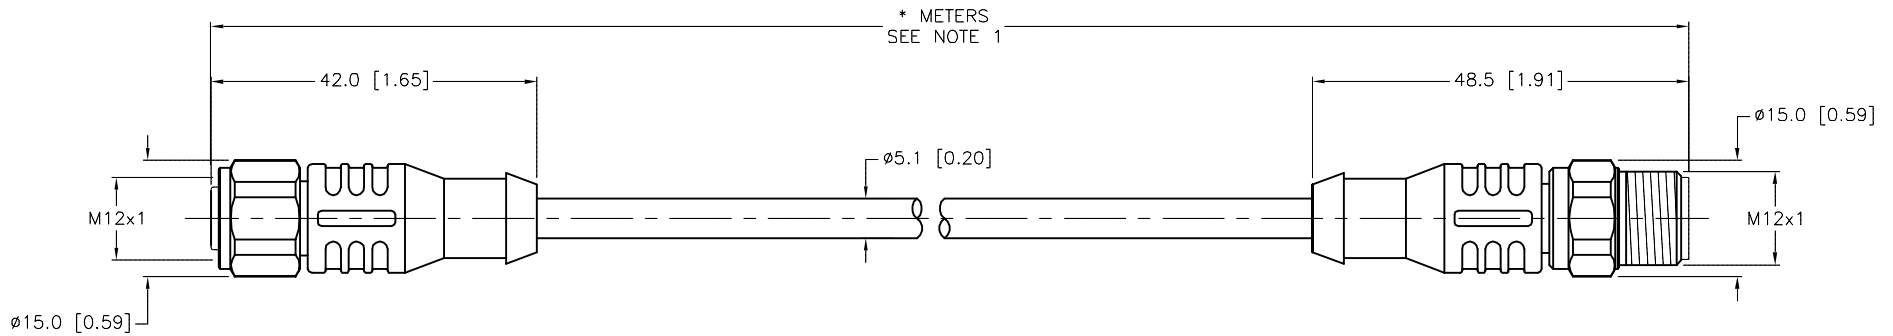


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC <i>High Technology Sensors and Automation Controls</i>		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
	MATERIAL	DRFT KMY	DATE 07/09/12					DESCRIPTION WD-RKCV 4T-*--RSCV 4T	
	SEE SPECIFICATIONS	APVD A.A.	SCALE 1=1.0						
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV D			
SEE SPECIFICATIONS		MILLIMETER [INCH]							
	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		FILE: 777029410		SHEET 1 OF 1			

D	UPDATE MATERIAL SPECIFICATIONS	NF	07/21/15	50671
REV	DESCRIPTION	BY	DATE	ECO NO.