




MALE END VIEW	FEMALE END VIEW	SPECIFICATIONS																											
 1 (LONG) 1 = GREEN/YELLOW 2 = BLACK 3 = WHITE 	 1 = GREEN/YELLOW 2 = BLACK 3 = WHITE 	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>PVC</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>PVC/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>21.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/BLACK</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>3x14 AWG</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +90°C (-40°F to +194°F)</td></tr><tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K</td></tr><tr><td>CABLE RATINGS</td><td>UL: TC-ER DIRECT BURIAL, 90C, 600V CSA: CIC/TC, 90C, 600V</td></tr><tr><td>APPROVALS AND CERTIFICATIONS</td><td>UL 2237</td></tr></table>	CONTACT CARRIER MATERIAL	PVC	MOLDED HEAD MATERIAL/COLOR	PVC/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	21.0 A	RATED VOLTAGE [V]	600 V	OUTER JACKET MATERIAL/COLOR	PVC/BLACK	NUMBER OF CONDUCTORS [AWG]	3x14 AWG	CONDUCTOR INSULATION MATERIAL	PVC	TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)	PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K	CABLE RATINGS	UL: TC-ER DIRECT BURIAL, 90C, 600V CSA: CIC/TC, 90C, 600V	APPROVALS AND CERTIFICATIONS	UL 2237	
CONTACT CARRIER MATERIAL	PVC																												
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK																												
CONTACT MATERIAL/PLATING	BRASS/GOLD																												
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																												
RATED CURRENT [A]	21.0 A																												
RATED VOLTAGE [V]	600 V																												
OUTER JACKET MATERIAL/COLOR	PVC/BLACK																												
NUMBER OF CONDUCTORS [AWG]	3x14 AWG																												
CONDUCTOR INSULATION MATERIAL	PVC																												
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)																												
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K																												
CABLE RATINGS	UL: TC-ER DIRECT BURIAL, 90C, 600V CSA: CIC/TC, 90C, 600V																												
APPROVALS AND CERTIFICATIONS	UL 2237																												

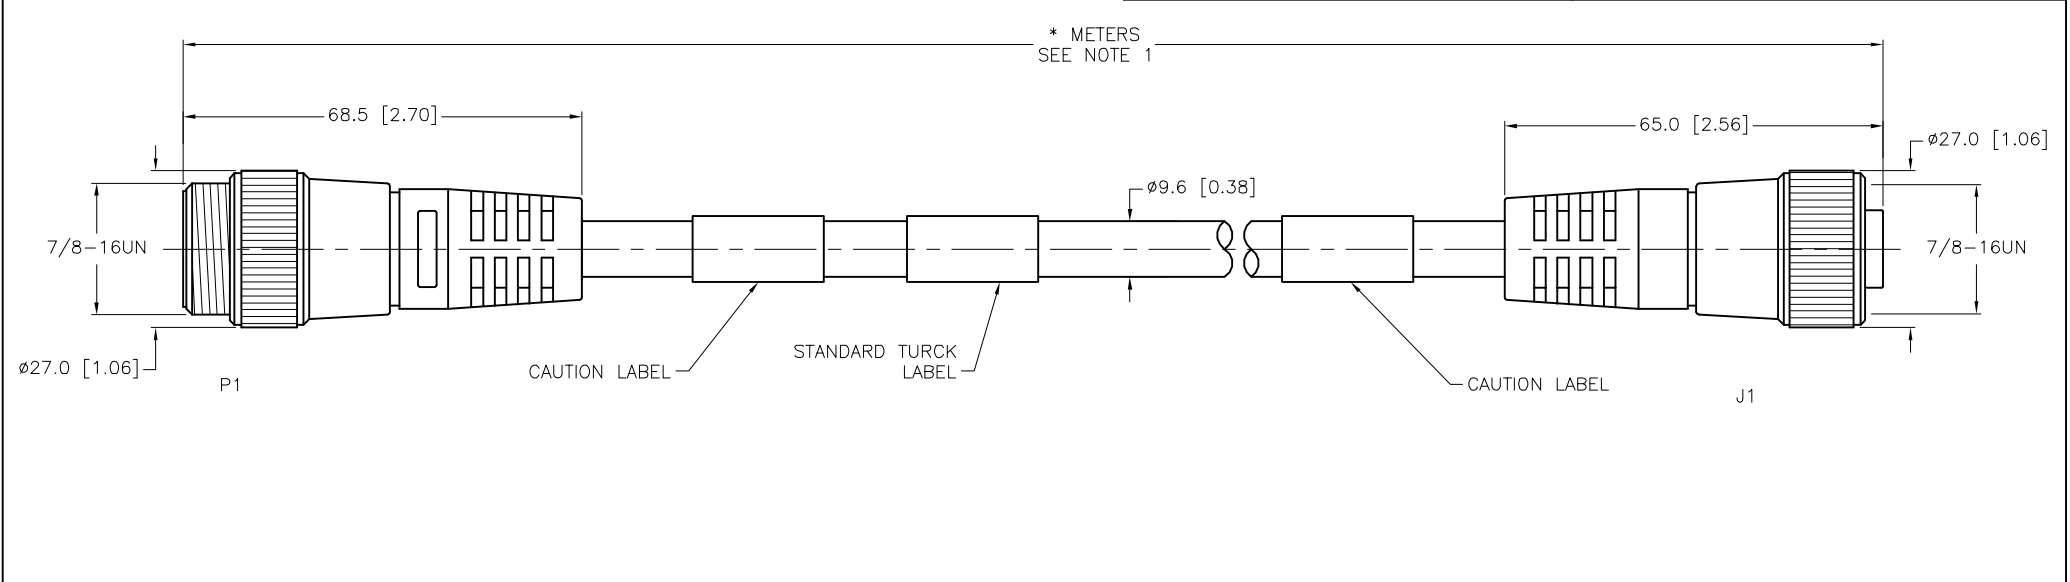

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

L	UPDATE PROTECTION CLASS	CBM	04/13/21	76628
REV	DESCRIPTION	BY	DATE	ECO NO.




CAUTION:

RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. RJP 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	RDS	DATE	07/23/12	
FINISH SEE SPECIFICATIONS		APVD	M.B.	SCALE	1 = 1.3	
		UNIT OF MEASUREMENT MILLIMETER [INCH]			DESCRIPTION P-PWR-RSM RKM 34-1198-*M	
		DO NOT SCALE THIS DRAWING			IDENTIFICATION NO. REV L	
		FILE: 777029475			SHEET 1 OF 1	