


MALE END VIEW

1 (LONG)  
1 = GREEN/YELLOW  
2 = BLACK  
3 = WHITE

FEMALE END VIEW

1 = GREEN/YELLOW  
2 = BLACK  
3 = WHITE

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	PVC
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	21.0 A
RATED VOLTAGE [V]	600 VAC
OUTER JACKET MATERIAL/COLOR	TPE/BLACK
NUMBER OF CONDUCTORS [AWG]	3x14 AWG
CONDUCTOR INSULATION MATERIAL	PVC
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K
CABLE RATINGS	UL: TC-ER DIRECT BURIAL, 90C, 600V CSA: CIC/TC, 90C, 600V
APPROVALS AND CERTIFICATIONS	UL 2237

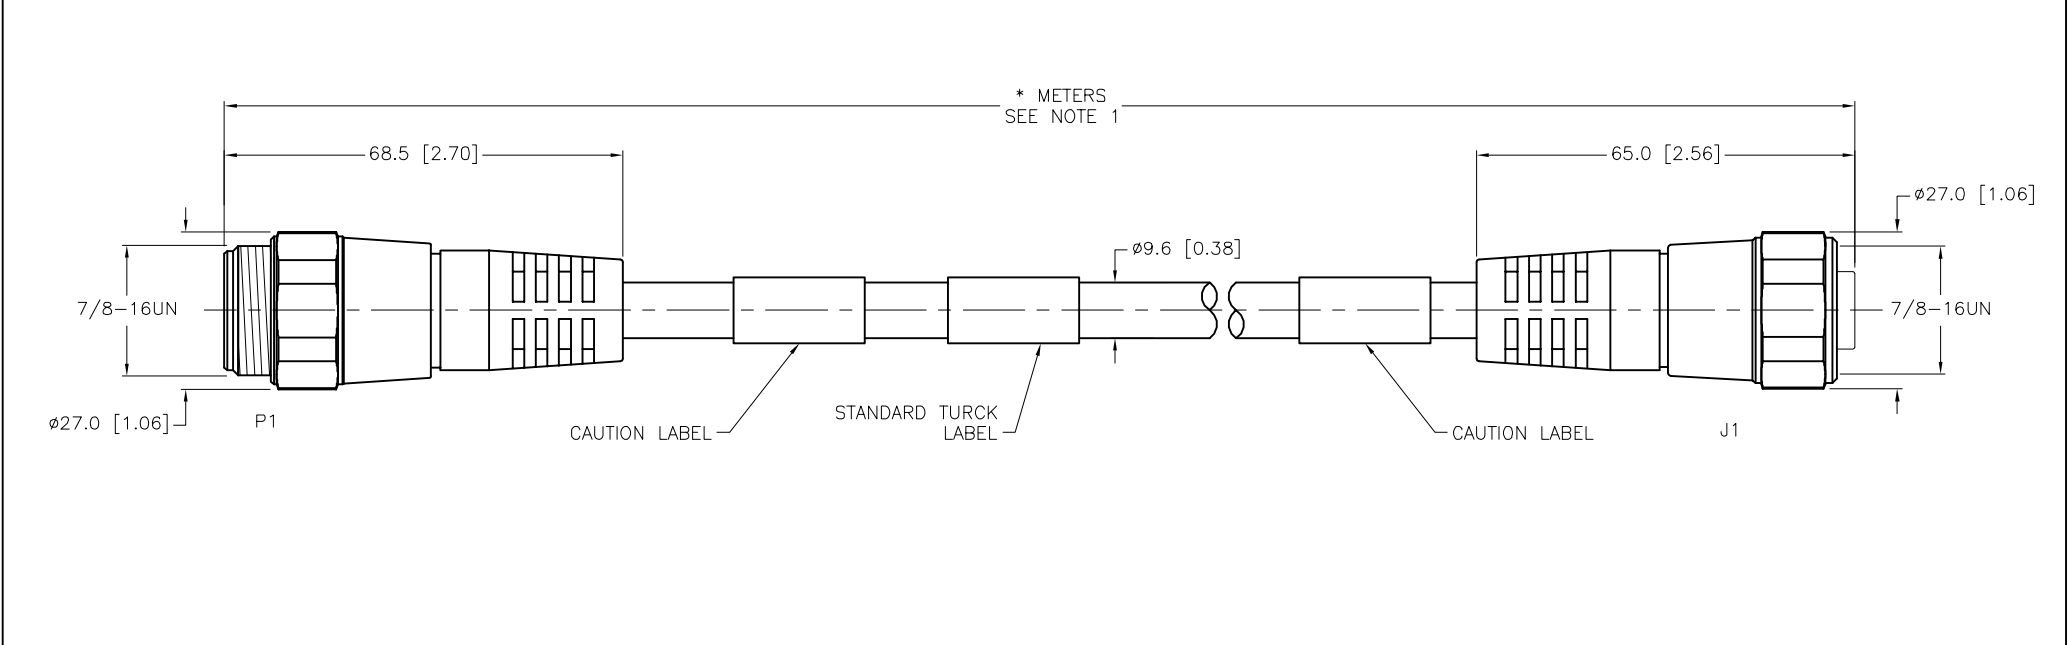

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

**CAUTION:**  
RISK OF ELECTRICAL SHOCK  
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

M	UPDATE PROTECTION CLASS	CBM	04/13/21	76628
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.		DRFT	RDS	DATE 07/23/12
2.		APVD	J.B.	SCALE 1=1.3
3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		DESCRIPTION
4.		MILLIMETER [ INCH ]		P-PWR-RSV RKV 34-1198-*M
MATERIAL	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	IDENTIFICATION NO.	
FINISH	SEE SPECIFICATIONS		REV	
		DO NOT SCALE THIS DRAWING	FILE: 777029493	SHEET 1 OF 1