


MALE END VIEW	FEMALE END VIEW	SPECIFICATIONS	
1 = BLACK 2 = GREEN/YELLOW 3 = WHITE	1 = BLACK 2 = GREEN/YELLOW 3 = WHITE	CONTACT CARRIER MATERIAL	PVC
		MOLDED MATERIAL/COLOR	PVC/BLACK
		CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	40.0 A
		RATED VOLTAGE [V]	600 V
		CABLE JACKET MATERIAL/COLOR	TPE/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBERS OF CONDUCTORS [AWG]	3x10 AWG
		TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K
		CABLE RATINGS	UL: TC-ER DIRECT BURIAL/STOOW, 90C, 600V CSA: CMX-OUTDOOR-CMG, 105C, 600V
		APPROVALS AND CERTIFICATIONS	UL 2237, FM CLASS 1 DIVISION 2

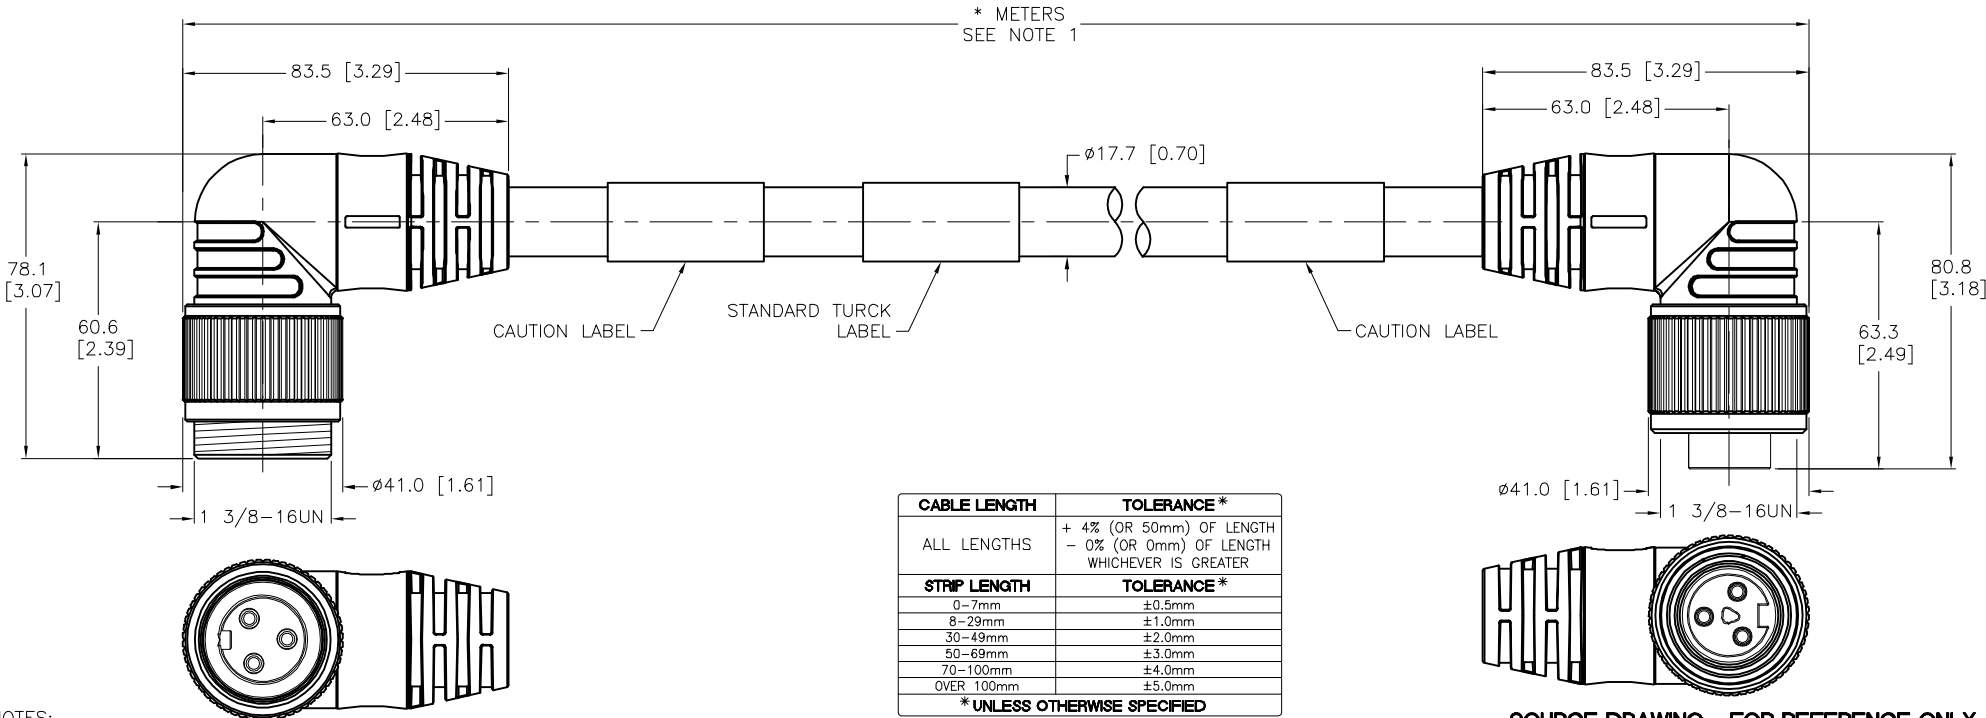

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- SERIALIZED PRODUCT LABEL.

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

1. * INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us						
2. SERIALIZED PRODUCT LABEL.					MATERIAL SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		KMY	DATE		07/31/12		DESCRIPTION P-PWR-GSDWM GKDWM 30-1667-*M	
 CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD									APVD		M.B.		SCALE		1=2.0		
					FINISH SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]					
DO NOT SCALE THIS DRAWING												FILE: 777029535				SHEET 1 OF 1	
J	UPDATE NOTES				NF	03/04/25	81023										
REV	DESCRIPTION				BY	DATE	ECO NO.										