




SPECIFICATIONS	
CONTACT CARRIER MATERIAL	PVC
MOLDED MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	40.0 A
RATED VOLTAGE [V]	600 V
CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBERS OF CONDUCTORS [AWG]	3x10 AWG
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K
CABLE RATINGS	UL: TC-ER DIRECT BURIAL, 90C, 600V CSA: CIC, 90C, 600V
APPROVALS AND CERTIFICATIONS	UL 2237, FM CLASS 1 DIVISION 2

MALE END VIEW	FEMALE END VIEW
 2 (LONG) 1 = BLACK 2 = GREEN/YELLOW 3 = WHITE	 1 = BLACK 2 = GREEN/YELLOW 3 = WHITE

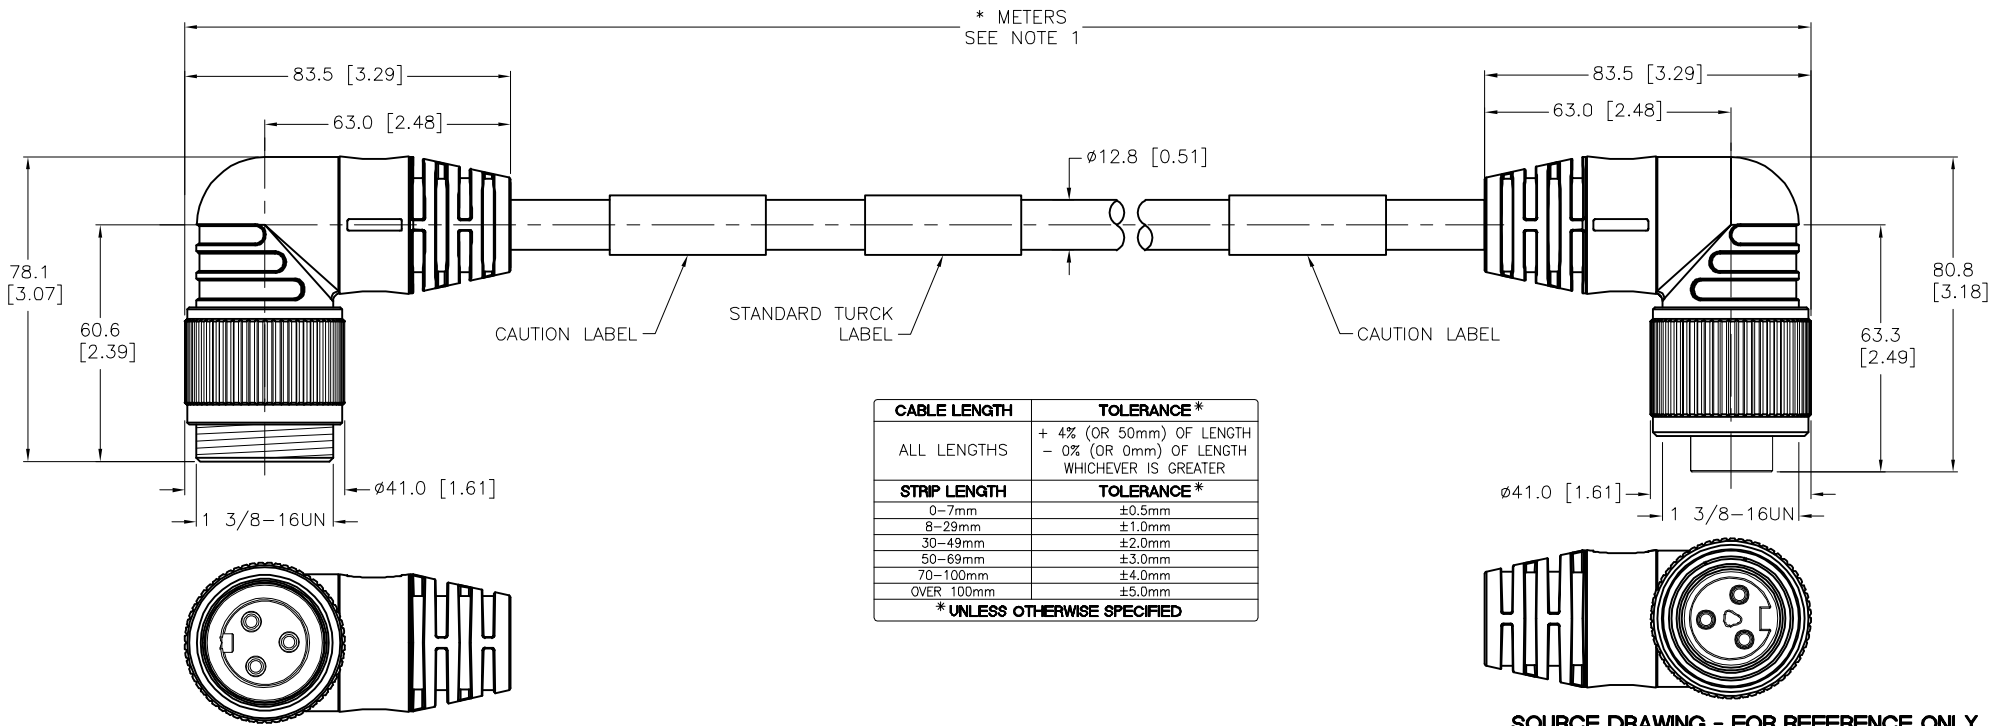


NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- SERIALIZED PRODUCT LABEL.



SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							
MATERIAL		DRFT KMY		DATE 07/31/12		DESCRIPTION	
SEE SPECIFICATIONS		APVD M.B.		SCALE 1=2.0		P-PWR-GSDWM GKDW 30-1742-*M	
FINISH		UNIT OF MEASUREMENT				IDENTIFICATION NO.	
SEE SPECIFICATIONS		MILLIMETER [INCH]				REV	
		DO NOT SCALE THIS DRAWING				J	
						FILE: 777029536	
						SHEET 1 OF 1	

J	UPDATE NOTES	NF	03/04/25	81024
REV	DESCRIPTION	BY	DATE	ECO NO.