


FEMALE END VIEW




- 1 = BLACK
2 = GREEN/YELLOW
3 = RED
4 = WHITE



SPECIFICATIONS

CONTACT CARRIER MATERIAL	PVC
MOLDED MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	32.0 A
RATED VOLTAGE [V]	600 V
CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBERS OF CONDUCTORS [AWG]	4x10 AWG
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K
CABLE RATINGS	UL: TC-ER DIRECT BURIAL, 90C, 600V CSA: CIC, 90C, 600V
APPROVALS AND CERTIFICATIONS	UL 2237, FM CLASS 1 DIVISION 2

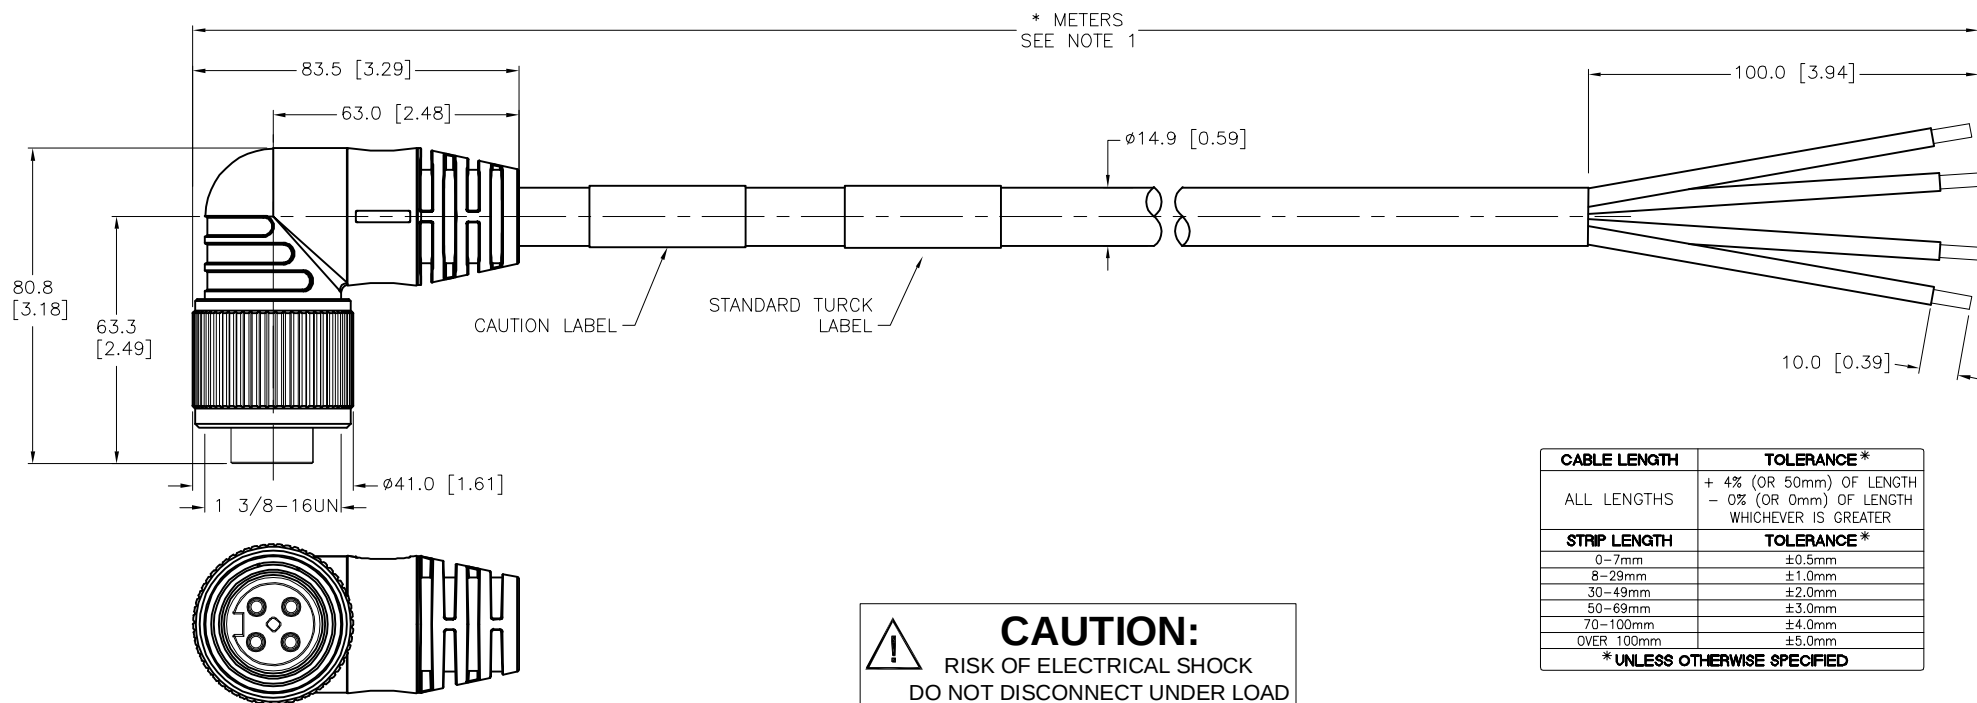

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	




CAUTION:

RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- SERIALIZED PRODUCT LABEL.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL	DRFT KMY	DATE 08/02/12		DESCRIPTION P-PWR-GKDWM 40-1743-*M
	SEE SPECIFICATIONS	APVD M.B.	SCALE 1=2.0		
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	REV J
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		FILE: 777029543	SHEET 1 OF 1

J	UPDATE NOTES	NF	03/04/25	81024
REV	DESCRIPTION	BY	DATE	ECO NO.