




MALE END VIEW	FEMALE END VIEW	SPECIFICATIONS																											
 (LONG) 1 = BLACK 2 = GREEN/YELLOW 3 = RED 4 = WHITE 	 1 = BLACK 2 = GREEN/YELLOW 3 = RED 4 = WHITE 	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>PVC</td></tr><tr><td>MOLDED MATERIAL/COLOR</td><td>PVC/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS or COPPER/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>32.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 VAC</td></tr><tr><td>CABLE JACKET MATERIAL/COLOR</td><td>TPE/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBERS OF CONDUCTORS [AWG]</td><td>4x10 AWG</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +90°C (-40°F to +194°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K</td></tr><tr><td>CABLE RATINGS</td><td>UL: TC-ER DIRECT BURIAL/STOOW, 90C, 600V CSA: CMX-OUTDOOR-CMG,105C, 600V</td></tr><tr><td>APPROVALS AND CERTIFICATIONS</td><td>UL 2237, FM CLASS 1 DIVISION 2</td></tr></table>	CONTACT CARRIER MATERIAL	PVC	MOLDED MATERIAL/COLOR	PVC/BLACK	CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	32.0 A	RATED VOLTAGE [V]	600 VAC	CABLE JACKET MATERIAL/COLOR	TPE/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMBERS OF CONDUCTORS [AWG]	4x10 AWG	TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K	CABLE RATINGS	UL: TC-ER DIRECT BURIAL/STOOW, 90C, 600V CSA: CMX-OUTDOOR-CMG,105C, 600V	APPROVALS AND CERTIFICATIONS	UL 2237, FM CLASS 1 DIVISION 2	
CONTACT CARRIER MATERIAL	PVC																												
MOLDED MATERIAL/COLOR	PVC/BLACK																												
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD																												
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																												
RATED CURRENT [A]	32.0 A																												
RATED VOLTAGE [V]	600 VAC																												
CABLE JACKET MATERIAL/COLOR	TPE/BLACK																												
CONDUCTOR INSULATION MATERIAL	PVC																												
NUMBERS OF CONDUCTORS [AWG]	4x10 AWG																												
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)																												
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K																												
CABLE RATINGS	UL: TC-ER DIRECT BURIAL/STOOW, 90C, 600V CSA: CMX-OUTDOOR-CMG,105C, 600V																												
APPROVALS AND CERTIFICATIONS	UL 2237, FM CLASS 1 DIVISION 2																												

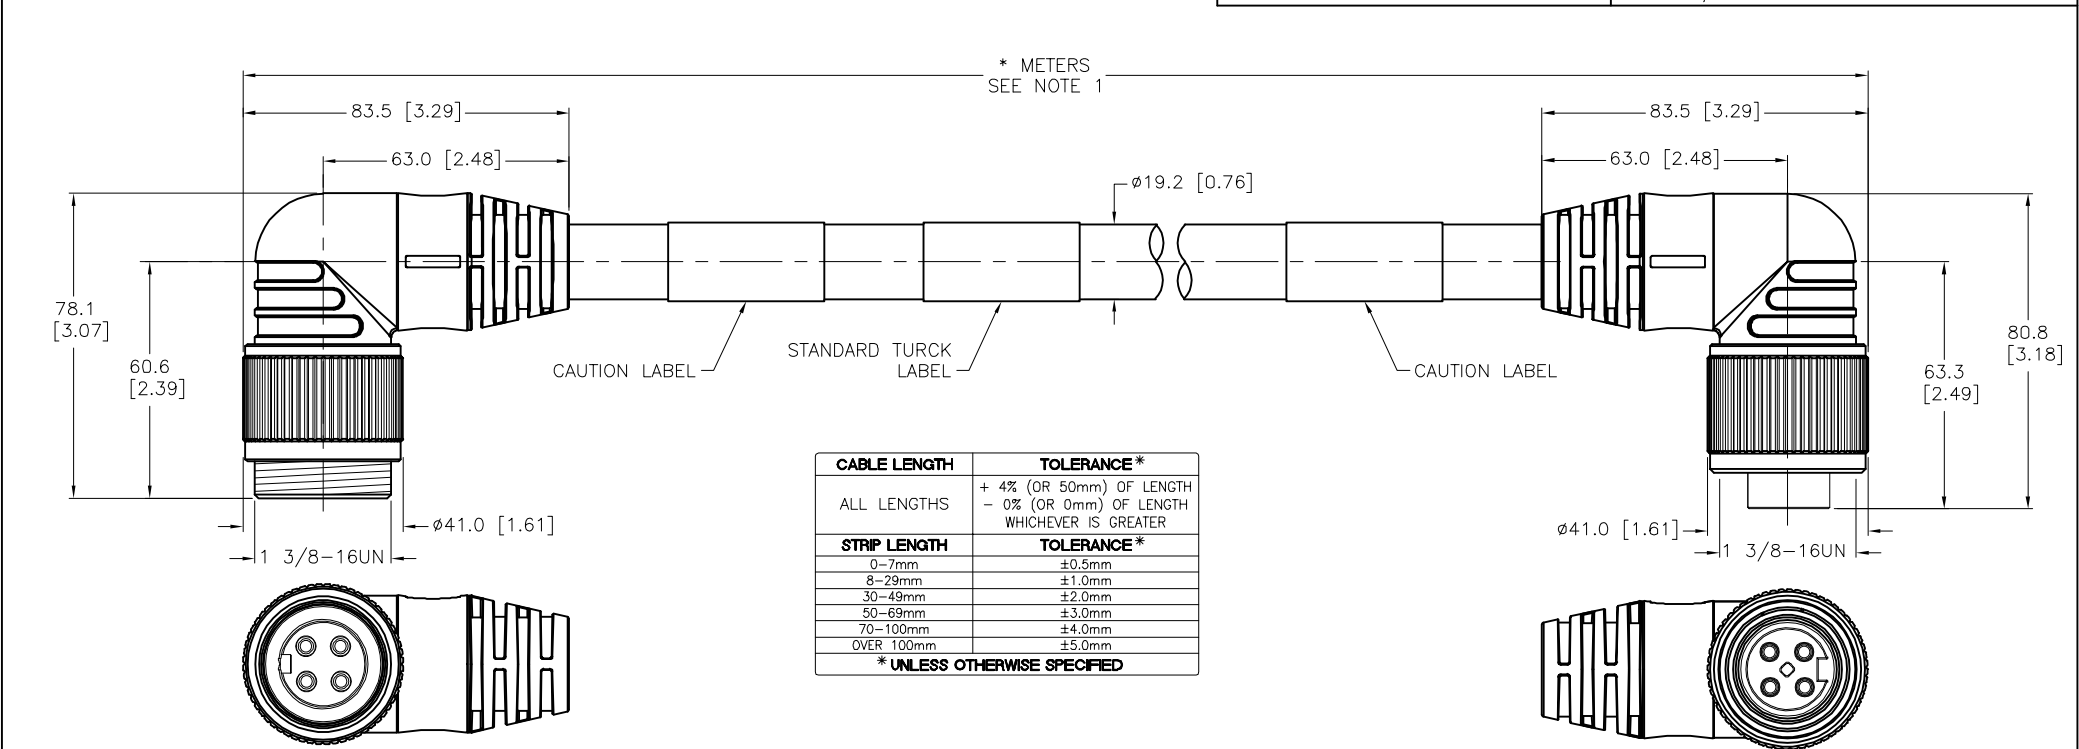

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - SERIALIZED PRODUCT LABEL.

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					
2. SERIALIZED PRODUCT LABEL.					
 CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD					
J	UPDATE NOTES		NF	03/04/25	81024
REV	DESCRIPTION		BY	DATE	ECO NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
1. 2. 3. 4.										
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT KMY		DATE 08/02/12		DESCRIPTION		
SEE SPECIFICATIONS				APVD M.B.		SCALE 1=2.0		P-PWR-GSDWM GKDW 40-1666-*M		
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT				IDENTIFICATION NO.		REV
SEE SPECIFICATIONS				MILLIMETER [INCH]						J
				DO NOT SCALE THIS DRAWING				FILE: 777029544		SHEET 1 OF 1