


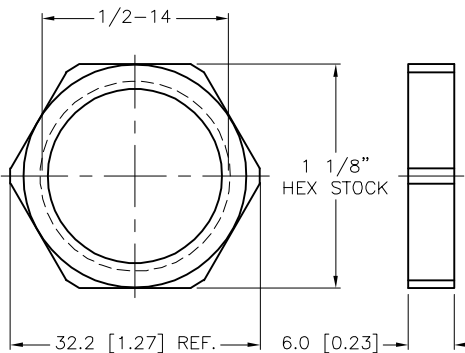


FEMALE END VIEW	PANEL CUTOUT	LOCKNUT	SPECIFICATIONS																									
 1 = BLACK 2 = GREEN/YELLOW 3 = RED 4 = WHITE			<table><tr><td>CONTACT CARRIER MATERIAL</td><td>PVC</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS or COPPER/GOLD</td></tr><tr><td>HOUSING MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>GASKET MATERIAL</td><td>NITRILE (BUNA-N)</td></tr><tr><td>RATED CURRENT [A]</td><td>27.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 V</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBERS OF CONDUCTORS [AWG]</td><td>4x12 AWG</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K</td></tr><tr><td>MAXIMUM PANEL THICKNESS</td><td>6.0mm [.236]</td></tr><tr><td>APPROVALS AND CERTIFICATIONS</td><td>UL 2237, FM CLASS 1 DIVISION 2</td></tr></table>	CONTACT CARRIER MATERIAL	PVC	CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD	HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	GASKET MATERIAL	NITRILE (BUNA-N)	RATED CURRENT [A]	27.0 A	RATED VOLTAGE [V]	600 V	CONDUCTOR INSULATION MATERIAL	PVC	NUMBERS OF CONDUCTORS [AWG]	4x12 AWG	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K	MAXIMUM PANEL THICKNESS	6.0mm [.236]	APPROVALS AND CERTIFICATIONS	UL 2237, FM CLASS 1 DIVISION 2	
CONTACT CARRIER MATERIAL	PVC																											
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD																											
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																											
GASKET MATERIAL	NITRILE (BUNA-N)																											
RATED CURRENT [A]	27.0 A																											
RATED VOLTAGE [V]	600 V																											
CONDUCTOR INSULATION MATERIAL	PVC																											
NUMBERS OF CONDUCTORS [AWG]	4x12 AWG																											
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)																											
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K																											
MAXIMUM PANEL THICKNESS	6.0mm [.236]																											
APPROVALS AND CERTIFICATIONS	UL 2237, FM CLASS 1 DIVISION 2																											

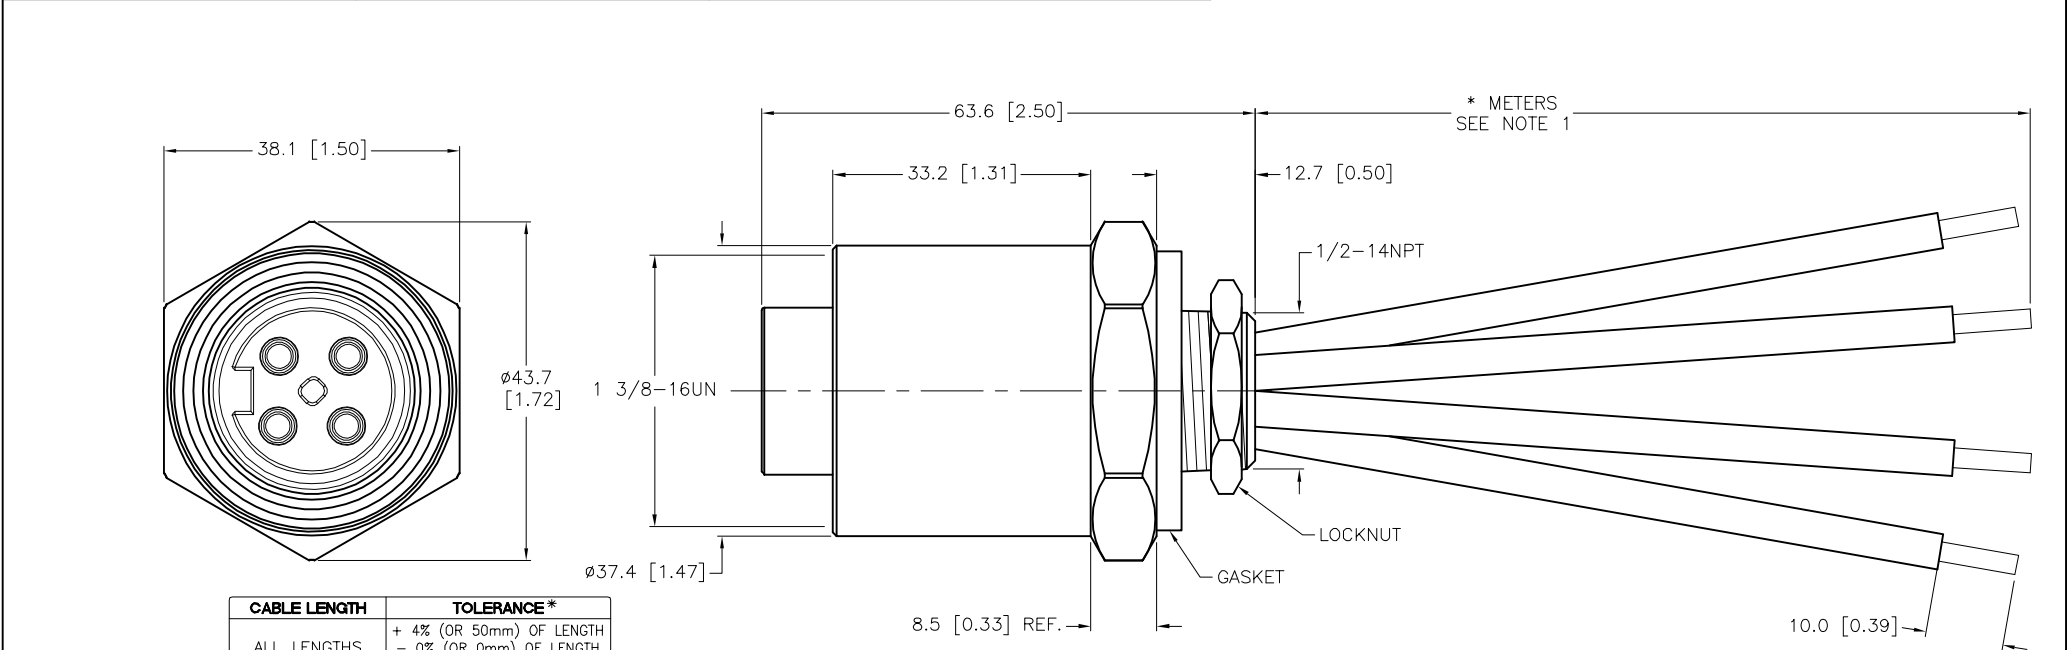


NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

**CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "＊" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. ⚠ CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us TURCK			
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT KMY		DATE 08/06/12		DESCRIPTION P-PWR-GKDFV 42-＊M/14.5/NPT	
					SEE SPECIFICATIONS				APVD M.B.		SCALE 1=1.0			
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT				IDENTIFICATION NO.		REV				
SEE SPECIFICATIONS				MILLIMETER [INCH]						H				
				DO NOT SCALE THIS DRAWING				FILE: 777029767		SHEET 1 OF 1				
H UPDATED CURRENT RATING		ER 01/19/21		500000002372										
REV DESCRIPTION		BY DATE		ECO NO.										