


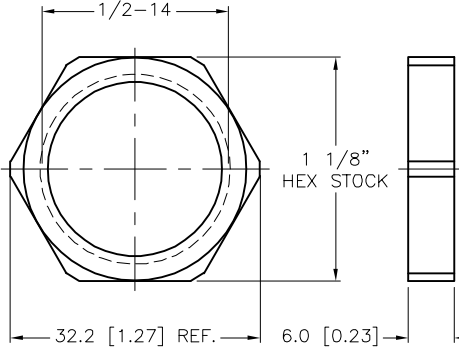


FEMALE END VIEW	PANEL CUTOUT	LOCKNUT	SPECIFICATIONS	
 1 = BLACK 2 = GREEN/YELLOW 3 = WHITE 			CONTACT CARRIER MATERIAL	PVC
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			HOUSING MATERIAL/FINISH	ALUMINUM/CLEAR-ANODIZED
			GASKET MATERIAL	NITRILE (BUNA-N)
			RATED CURRENT [A]	27.0 A
			RATED VOLTAGE [V]	600 V
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBERS OF CONDUCTORS [AWG]	3x14 AWG
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K
			MAXIMUM PANEL THICKNESS	6.0mm [.236]
			APPROVALS AND CERTIFICATIONS	UL 2237, FM CLASS 1 DIVISION 2

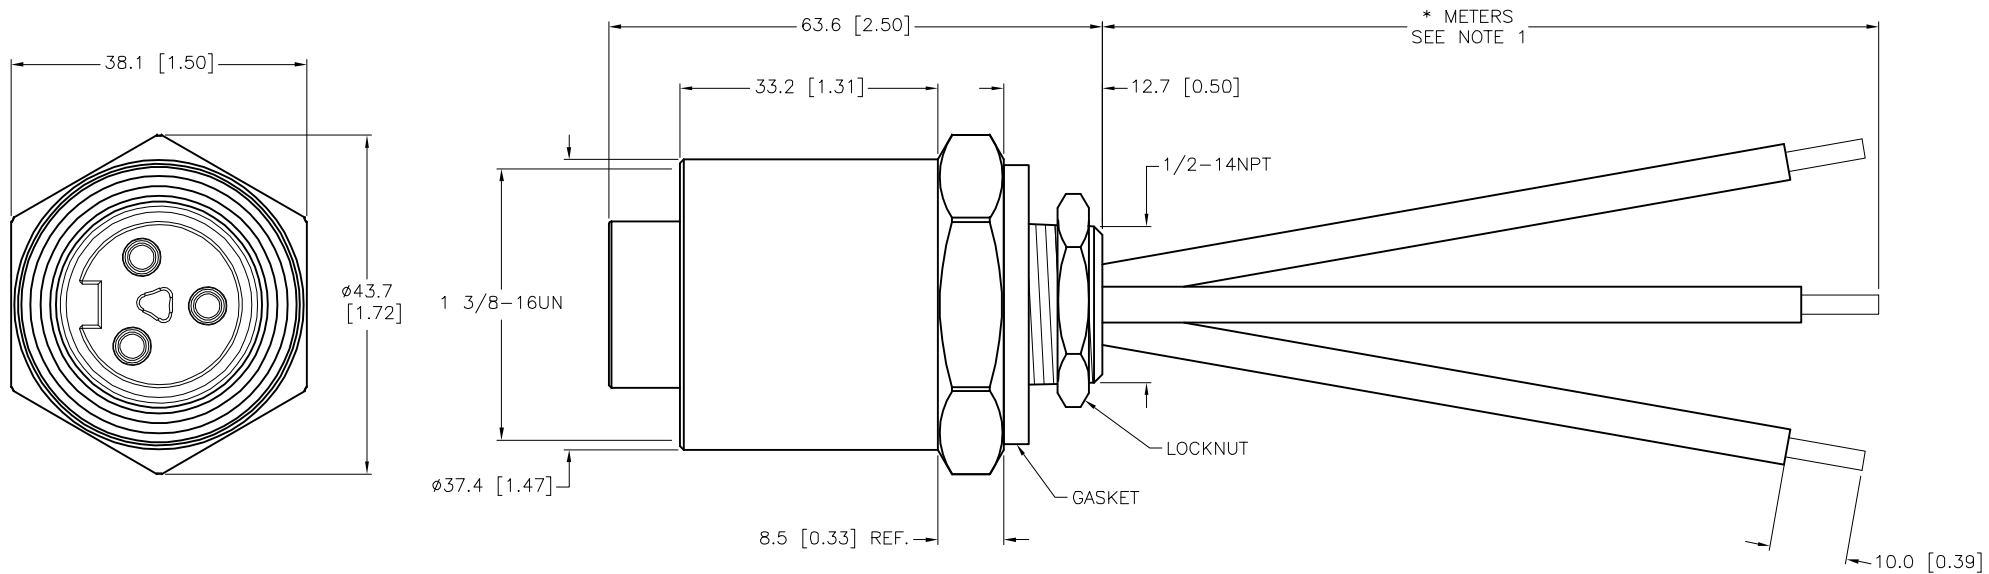

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	


NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.



CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us										
1.																
2.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT	RDS	DATE	08/02/12			DESCRIPTION P-PWR-GKDFA 34-*M/14.5/NPT						
3.				APVD	M.B.	SCALE	1=1.0									
4.				UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING					IDENTIFICATION NO.		REV H					
MATERIAL													SEE SPECIFICATIONS			
FINISH									SEE SPECIFICATIONS		FILE: 777029783				SHEET 1 OF 1	

H	UPDATED CURRENT RATING	ER	01/19/21	500000002372
REV	DESCRIPTION	BY	DATE	ECO. NO.