


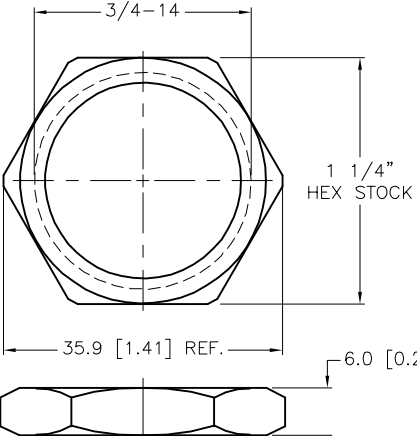
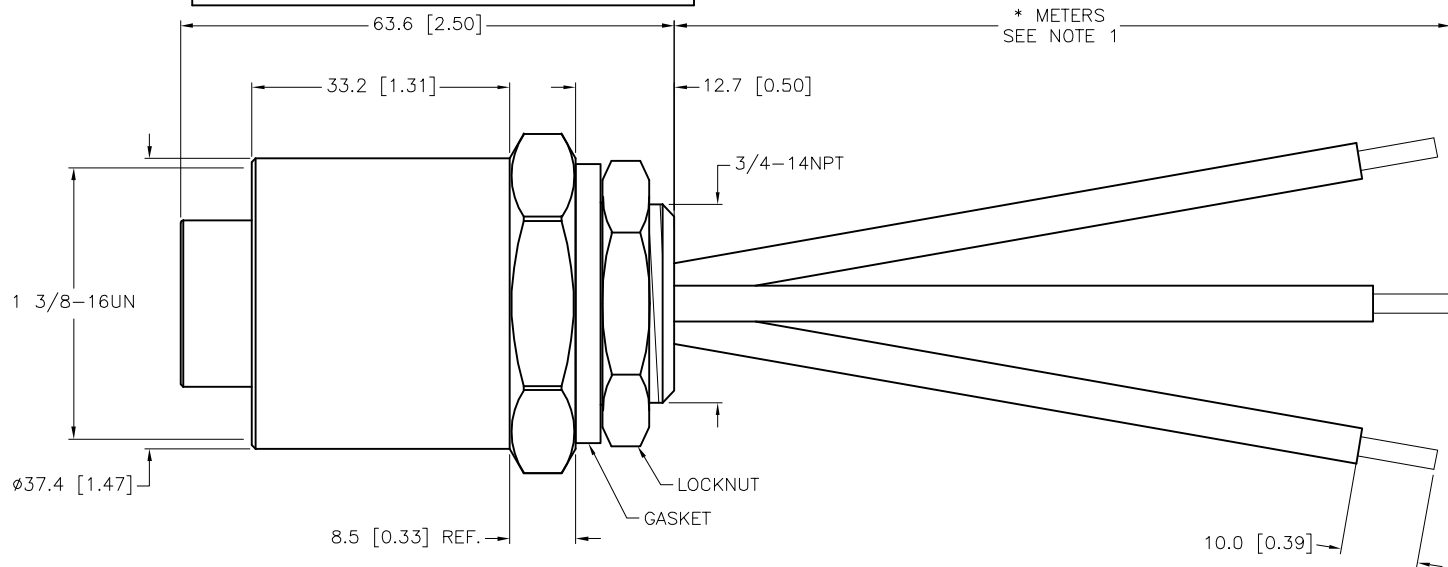


FEMALE END VIEW	PANEL CUTOUT	LOCKNUT	SPECIFICATIONS	
 1 = BLACK 2 = GREEN/YELLOW 3 = WHITE 			CONTACT CARRIER MATERIAL	PVC
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			HOUSING MATERIAL/FINISH	ALUMINUM/CLEAR-ANODIZED
			GASKET MATERIAL	NITRILE (BUNA-N)
			RATED CURRENT [A]	27.0 A
			RATED VOLTAGE [V]	600 V
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBERS OF CONDUCTORS [AWG]	3x14 AWG
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K
			MAXIMUM PANEL THICKNESS	6.0mm [.236]
			APPROVALS AND CERTIFICATIONS	UL 2237, FM CLASS 1 DIVISION 2

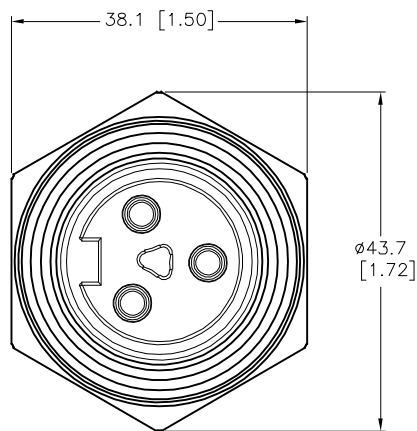

* METERS
SEE NOTE 1

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:


1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.



CAUTION:

RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	TURCK
MATERIAL	SEE SPECIFICATIONS	DRFT RDS	DATE 08/02/12	DESCRIPTION P-PWR-GKDFA 34-*M/14.75/NPT
FINISH	SEE SPECIFICATIONS	APVD M.B.	SCALE 1=1.0	
		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.
		DO NOT SCALE THIS DRAWING		REV H
		FILE: 777029785		SHEET 1 OF 1

H	UPDATED CURRENT RATING	ER	01/19/21	500000002372
REV	DESCRIPTION	BY	DATE	ECO NO.