
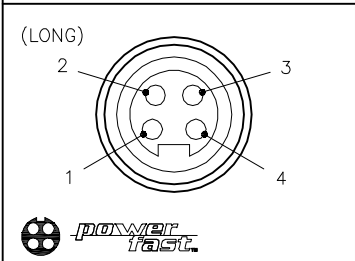
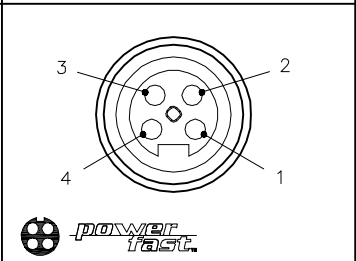
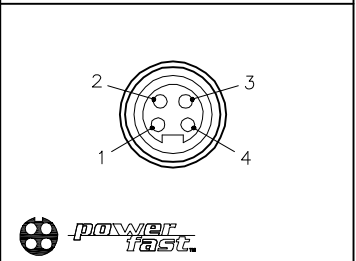



MALE END VIEW	FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	PVC
			MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	35.0 A COMBINED, 18.0 A DROP
			RATED VOLTAGE [V]	600 V
			CABLE JACKET MATERIAL/COLOR	PVC/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
			NUMBERS OF CONDUCTORS [AWG]	4x14 AWG
			TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
			CABLE RATINGS	UL: TC-ER DIRECT BURIAL, 90C, 600V CSA: CIC, 90C, 600V
			APPROVALS AND CERTIFICATIONS	FM CLASS 1 DIVISION 2

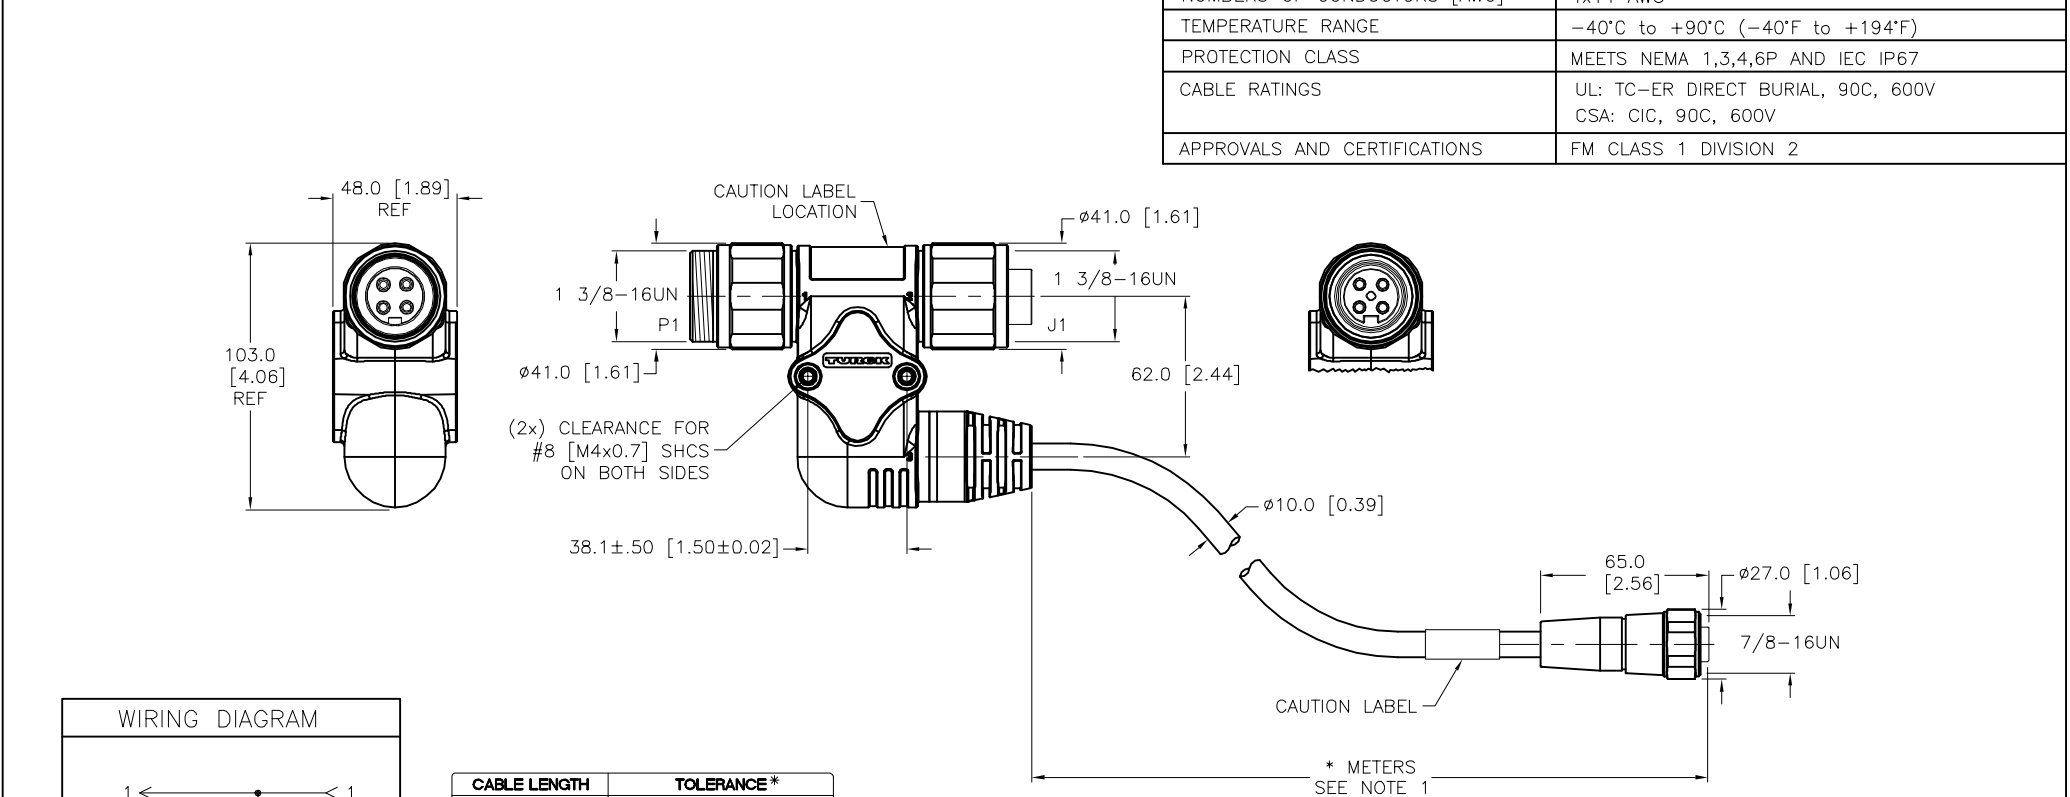

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

H	UPDATE RATED CURRENT AND VOLTAGE	RDS	01/19/21	500000002372
REV	DESCRIPTION	BY	DATE	ECO NO.

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
1.			
2.			
3.			
4.			
MATERIAL	SEE SPECIFICATIONS	DRFT RDS	DATE 04/11/13
FINISH	SEE SPECIFICATIONS	APVD M.B.	SCALE 1=3.0
		UNIT OF MEASUREMENT MILLIMETER [INCH]	
		DESCRIPTION P-PWR-SH-GSDV/GKDV/RKV 44-1750-*	
		IDENTIFICATION NO.	
		REV H	
		DO NOT SCALE THIS DRAWING	
		FILE: 777030017	
		SHEET 1 OF 1	