


FEMALE END VIEW




A = BROWN
 B = TAN
 C = BLUE
 D = YELLOW/BROWN
 E = GREEN
 F = WHITE/YELLOW
 G = PINK
 H = BROWN/GREEN
 J = BLACK
 K = WHITE/GREEN
 L = RED/BLUE
 M = GRAY/PINK
 N = ORANGE
 P = GRAY
 R = RED
 S = WHITE
 T = VIOLET
 U = GRAY/BROWN
 V = YELLOW

CONNECTOR
 TYPE/STYLE - MS 3116M
 SHELL SIZE - 14
 INSERT ARRANGEMENT - 19S

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NEOPRENE
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	300 V
OUTER JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS	19x22 AWG
DRAIN/SHIELD	24 AWG DRAIN/POLYESTER FOIL SHIELD
TEMPERATURE RATING	-40°C TO +105°C (-40°F TO +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68
CONNECTOR TYPE	MIL-DTL-26482

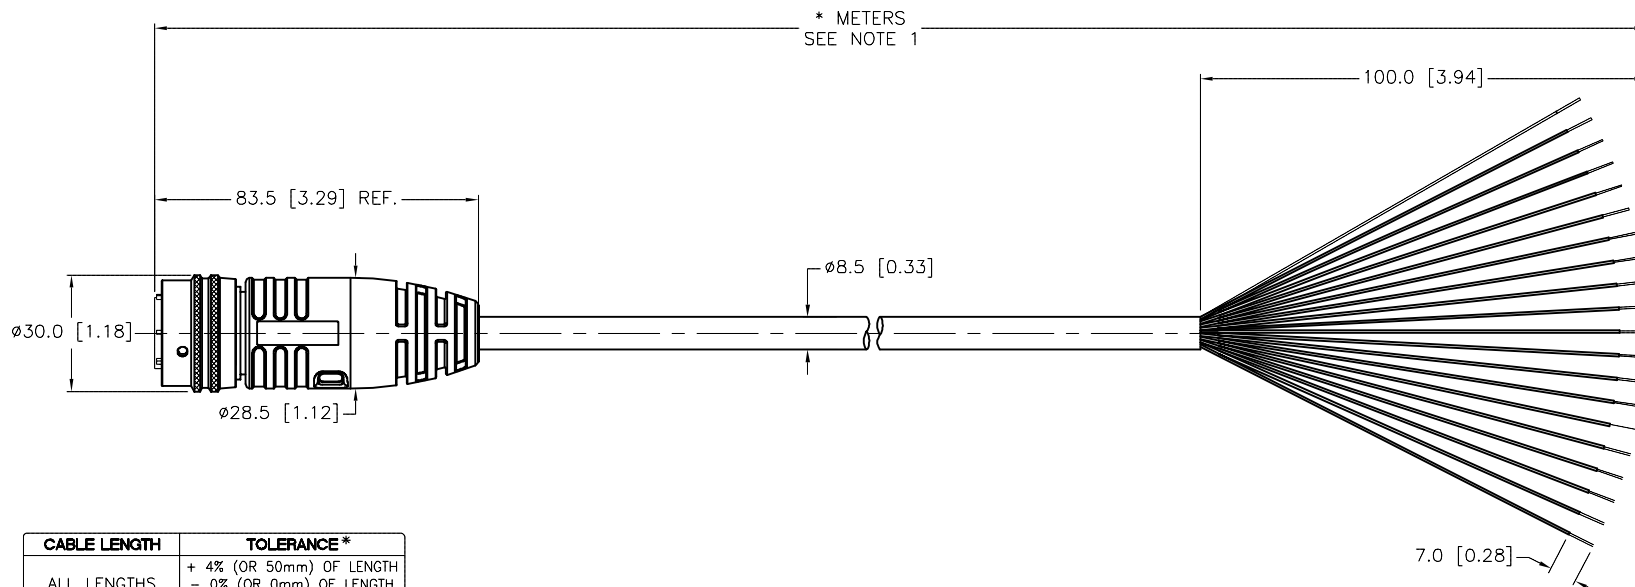


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
1. 2. 3. 4.								
MATERIAL		DRFT	RDS	DATE	07/24/12	DESCRIPTION		
SEE SPECIFICATIONS		APVD	J.B.	SCALE	1=2.0	MS 3116M-14-19S-0995-*		
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV
SEE SPECIFICATIONS						CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING
						FILE: 777030092		SHEET 1 OF 1

D	UPDATE COUPLING NUT DIAMETER	RDS	09/19/18	66883
REV	DESCRIPTION	BY	DATE	ECO NO.