


1	
SPECIFICATIONS	
CONTACT CARRIER MATERIAL	TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	300 V
OUTER JACKET MATERIAL/COLOR	CPE/YELLOW
CONDUCTOR INSULATION MATERIAL	EPDM
NUMBER OF CONDUCTORS [AWG]	3x18 AWG
TEMPERATURE RATING	-50°C to +105°C (-58°F to +221°F)
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K

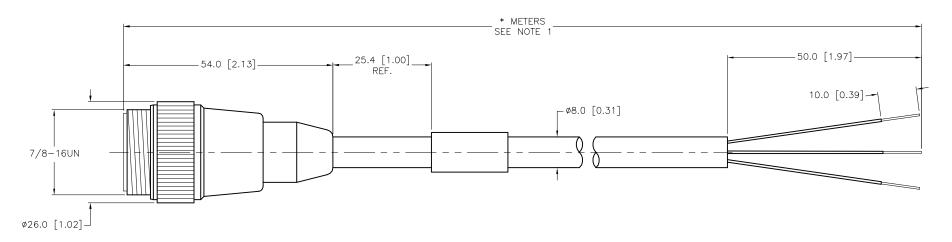

RELATED DOCUMENTS

2.

3.

CABLE LENGTH	TOLERANCE *	
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	
STRIP LENGTH	TOLERANCE*	
0-7mm	±0.5mm	
8-29mm	±1.0mm	
30-49mm	±2.0mm	
50-69mm	±3.0mm	
70-100mm	±4.0mm	
OVER 100mm	±5.0mm	
* UNLESS OTHERWISE SPECIFIED		

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S600" DESIGNATES HEAVY DUTY RUBBER INSULATION MATERIAL.
- 3. "/S1089" DESIGNATES CORDSET LABEL LOCATED APPROX. 1 INCH FROM MOLDED PLUG SIDE.

C UPDATE PROTECTION CLASS CBM 04/13/21	76628
REV DESCRIPTION BY DATE	ECO NO.

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS PROHIBITED. MATERIAL DATE 01/10/13 DESCRIPTION KMY ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY SCALE 1=1.0 APVD T.S. SEE SPECIFICATIONS UNIT OF MEASUREMENT MILLIMETER [INCH] CONTACT TURCK FOR MORE SEE SPECIFICATIONS INFORMATION

3RD ANGLE PROJECTION

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

RSM 311-*M/S600/S1089

IDENTIFICATION NO. REV DO NOT SCALE THIS DRAWING FILE: 777030374 SHEET 1 OF 1